
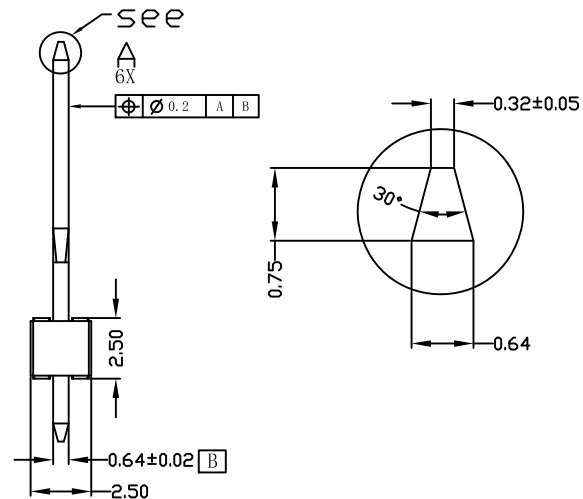
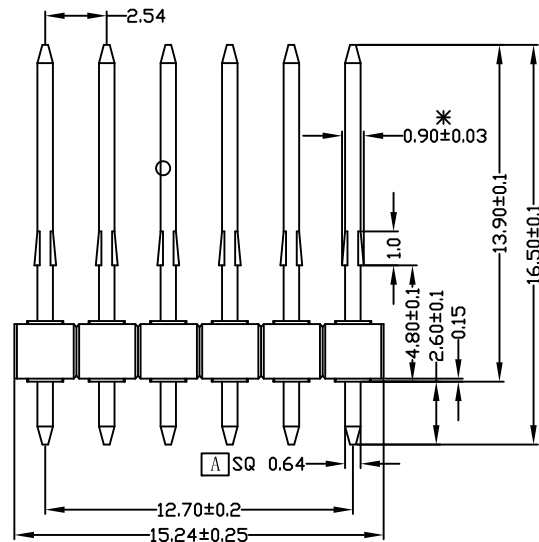


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	11/27/18	

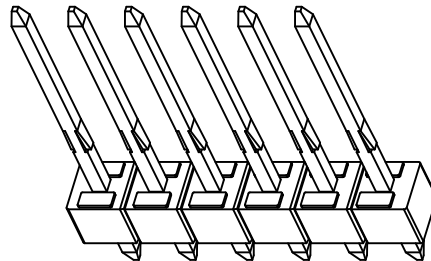

**SPECIFICATIONS:**

Material:  
 Insulator: PA6T+30%GF, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Plating:  
 Matte Tin over Nickel underplate overall  
 Electrical:  
 Current rating: 3 Amp  
 Contact resistance: 20 mohms max  
 Insulation resistance: 1,000 Mohms min  
 Dielectric withstanding voltage: 500 VAC  
 Temperature Rating:  
 -40°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MILLIMETERS TOLERANCES: EXCEPT AS NOTED MM ANGLE X.X ± 0.25 ± 3° X.XX ± 0.20 X.XXX ± 0.10		<b>ADAM TECH</b> INTERCONNECTS 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
APPROVALS DRAWN AY CHECKED AC APPROVED		DATE 11/27/18 11/27/18	
TITLE <b>2.54 PITCH PIN HEADER, 1*6 PIN, STRAIGHT</b>		SIZE <b>X</b>	PART NO. <b>ADT-AMP1251106S4BS165A1</b>
REF: S00111C		SCALE: NTS	REV. - SHEET 1 OF 1