


## ST 2,5-3L BU

Order No.: 3038710



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=3038710>

Feed-through modular terminal block, Type of connection: Spring-cage connection, Cross section: 0.08 mm<sup>2</sup> - 4 mm<sup>2</sup>, AWG 28 - 12, Width: 5.2 mm, Color: blue, Mounting type: NS 35/7.5, NS 35/15

| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 892739 |
| sales group              | A634   |
| Pack                     | 50 pcs.  |
| Customs tariff           | 85369010   |
| Catalog page information | Page 102 (CL-2009)   |

### Product notes

WEEE/RoHS-compliant since:  
01/01/2003



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Certificates / Approvals



Certification


CB, CSA, CUL, GOST, UL, VDE-PZI

| <b>Accessories</b>  |                      |  |
|---------------------|----------------------|--|
| Item                | Designation          | Description  |
| <b>Assembly</b>     |                      |  |
| 3036660             | D-ST 2,5-3L          | End cover, Length: 99.5 mm, Width: 2.2 mm, Height: 57.5 mm, Color: gray  |
| <b>Bridges</b>      |                      |  |
| 3030161             | FBS 2-5              | Plug-in bridge, Number of positions: 2, Color: red   |
| 3030174             | FBS 3-5              | Plug-in bridge, Number of positions: 3, Color: red   |
| 3030187             | FBS 4-5              | Plug-in bridge, Number of positions: 4, Color: red   |
| 3030190             | FBS 5-5              | Plug-in bridge, Number of positions: 5, Color: red   |
| 3030213             | FBS 10-5             | Plug-in bridge, Number of positions: 10, Color: red  |
| 3030226             | FBS 20-5             | Plug-in bridge, Number of positions: 20, Color: red  |
| 3038930             | FBS 50-5             | Plug-in bridge, Number of positions: 50, Color: red  |
| <b>Marking</b>      |                      |  |
| 0810562             | STP 5-3              | Triple marker carriers, snaps onto the three-level spring-cage terminal block ST 2.5-3L, labeled with ZB 5 or ZBF  |
| 3030941             | WST 2,5              | Warning cover, 5-pos., for terminal width: 5.2 mm  |
| 0807180             | ZBFM 5/OG:UNBEDRUCKT | Zack marker sheet, flat, unprinted: 120-section, 10 strips à 12 markers, sufficient for 120 terminal blocks, for all terminal blocks, pitch 5.2 mm, labeling with M-PEN or CMS system, color: orange |
| 0803595             | ZBFM 5/WH:UNBEDRUCKT | Zack marker sheet, flat, unprinted: 120-section, 10 strips à 12 markers, sufficient for 120 terminal blocks, for all terminal blocks, pitch 5.2 mm, labeling with M-PEN or CMS system, color: white  |
| 0803647             | ZBFM 5:SO/CMS        | Special printing, Zack marker sheet, flat, 120-section, divisible, marking according to customer requirements  |
| <b>Plug/Adapter</b> |                      |  |
| 3002843             | ISH 2,5/0,2          | Insulation stop sleeve, Color: white   |
| 3002856             | ISH 2,5/0,5          | Insulation stop sleeve, Color: gray  |
| 3002869             | ISH 2,5/1,0          | Insulation stop sleeve, Color: black   |
| 3030925             | PAI-4                | Test adapter, Color: gray  |
| 3030983             | PS-5                 | Test adapter, Color: red   |
| <b>Tools</b>        |                      |  |
| 1204517             | SZF 1-0,6X3,5        | Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip  |

**Diagrams/Drawings**

Circuit diagram

---

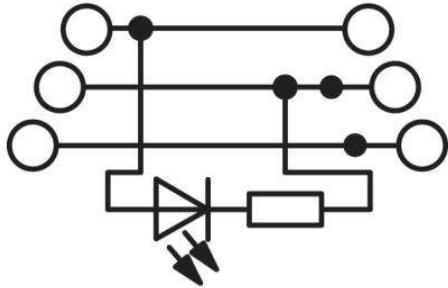

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;