


A


A

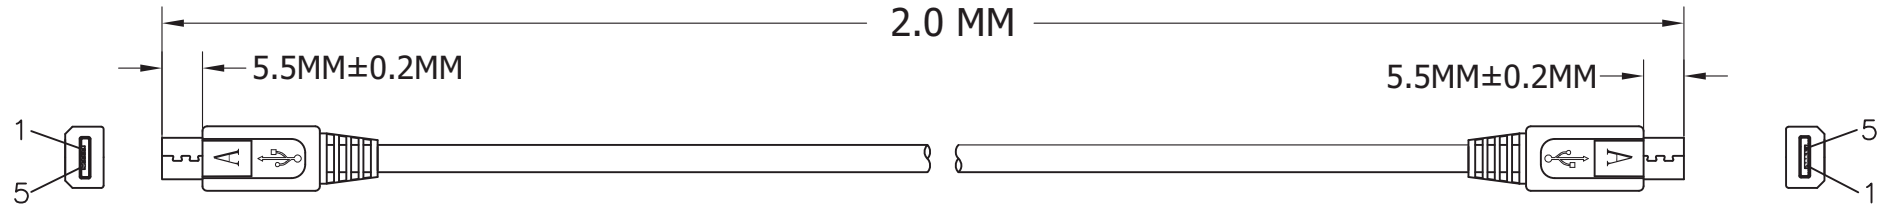


B

B

P1




P2



C

C

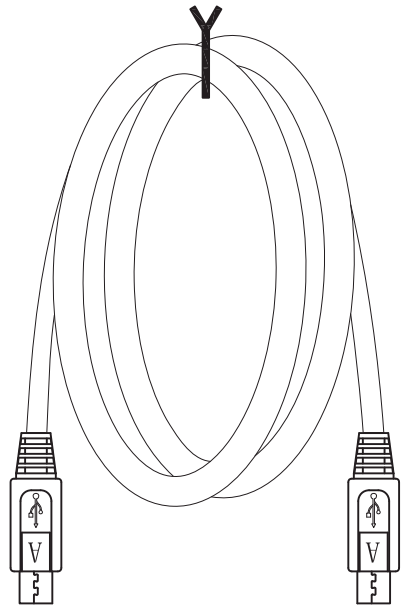

PIN ASSIGNMENT		
P1		P2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
5		5
SHELL	DRAIN + BRAID	SHELL

Material:

- Cable: USB2.0 UL2725 [28AWG(7/0.12TC+AL):*1P+ 28AWG(7/0.12TC)*2C]+AEB(488 TC)
 - Jacket: Black
 - OD: 3.5MM
- Connectors: Micro USB 5P A/M Solder Type
 - Shell: Nickel
 - Pin: G/F
 - Insulator Color: Black
- Outer Jacket: Black PVC-50P

Electrical:

- 100% short, open, miswire test
- Conduct resistance: 2Ω Max.
- Insulation resistance: 5MΩ Min.
- Hi-Pot test: 300V DC

D

D

E

E

F

F

G

G

H

H



Scale	1:1						Name
TOLERANCE					Drawn	10.19.11	Chappell
X.X	±0.40				Approved		
X.XX	±0.25						
X.XXX	±0.15						
Angle	±3°						
Modification	Date	Name					

Item No.	AK67301-2-R
Title	USB2.0 Micro Connection Cable, 2 Meters USB A Micro Male <=> USB A Micro Male
Drawing No.	
Replace	rev00
Sheet	