



PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

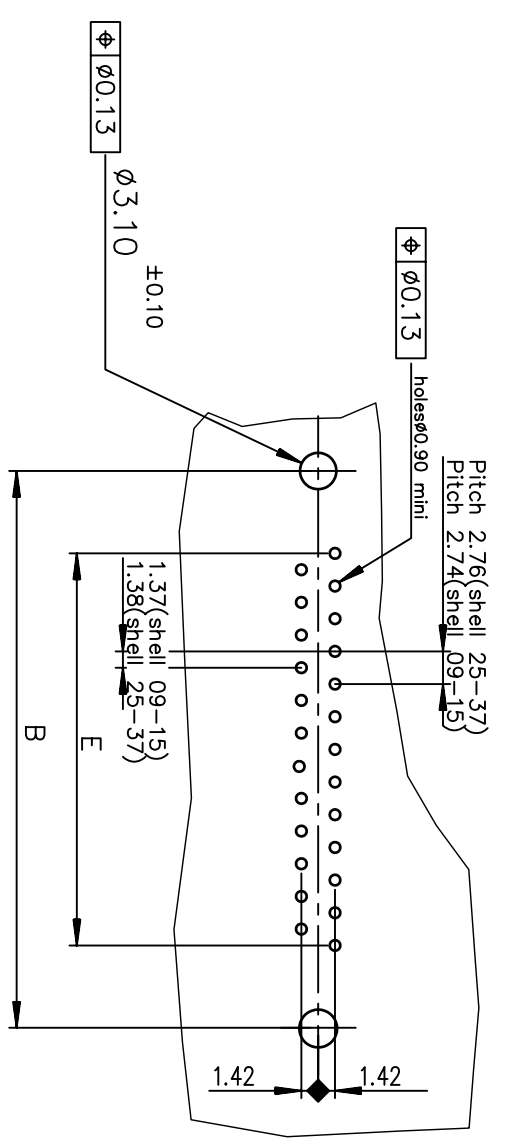

SECTION TERMINAISON CONTACT



TIN LEAD PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PA00
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PA00
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PA00
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PA00

Plating: 4 ---> flash AU
Plating: 6 ---> 0.76» AU

LEAD FREE PART NUMBER

SHELL	A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	PART NUMBER
09	30.81	24.99	16.96	16.79	10.96	D09P24A.PA00LF
15	39.14	33.32	25.18	25.12	19.18	D15P24A.PA00LF
25	53.03	47.04	39.12	38.84	33.12	D25P24A.PA00LF
37	69.32	63.50	55.68	55.30	49.68	D37P24A.PA00LF

Plating: 4 ---> flash AU
Plating: 6 ---> 0.76» AU

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:
SEE DRAWING C01-8646-0000

www.fciconnect.com

Dr	JARRY	1992-09-11	ANGULAR	tolerance std	projection	Scale
Eng	PESSON	1992-09-11	LINEAR	ISO 1302	ISO 406 ISO 1101	A3
Chr	NIRMAL GEORGE	2009-11-24	0xx' ±2	TOLERANCES UNLESS OTHERWISE SPECIFIED		
Appr	SUDHIR VARMA	2009-11-24	0.xxx	European Views		

rev	ecn no	dr	date
F	-	-	1996/09/25
H	LS05-001	MPE	2005/03/09
J	LS06-0097	LGO	2006/07/29
K	109-0268	NG	2009-11-24

FCI MALE CONNECTOR DELTA D STD EUROPE
straight,solder type for PCB 1.6mm

C01-8646-0095

CUSTOMER sheet 1 of 1

