



# Highbay Smart Sensor & Relay

## 0-10v Adjustable

ILLUMRA Highbay Smart Sensor & Relay is 0-10v and adjustable. The NWO-DUV-OCC provides automatic lighting control for high or low bay applications. PIR sensor lens options supports mounting heights from 8 to 45 ft (2.5-15m)

Selectable modes allow motion sensor with or without ambient light hold off. After the motion timeout lights to 50% to stay or can turn off after a second timeout.


Each unit includes a light level sensor to prevent light from turning on when sufficient ambient light is available.

### Easy-To-Use

- Installs in minutes
- Adjustable threshold
- High-End trim
- Easy to configure
- Selectable modes
- 8-45' Lens Options

### Recommended Fixtures

- Highbay Lights
- Lowbay Lights
- Strip Lights
- Wrap Lights
- Canopy Lights

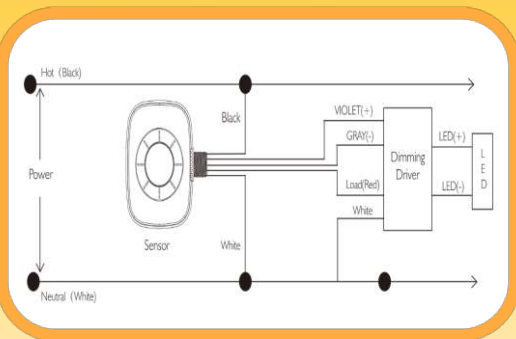

### Recommended Fixtures

- Highbay Lights
- Lowbay Lights
- Strip Lights
- Wrap Lights
- Canopy Lights

### Control The Way You Want It

- 0-10v Dimming Control
- Adjustable threshold for ambient light hold off
- Adjustable high-end trim
- Selectable modes allow motion sensor with or without ambient light hold off

### SPECIFICATIONS

Part Number	NOW-DUV-OCC
Power Supply	120-277 VAC 50/60 Hz
Max Load	10 Amps, 1200W Max for LED driver only
Mounting Height	Standard Lens: 8-12 ft, High bay lense 12-40 ft
Operating Temperatures	-40 to ~158 °F (-40 to ~70°C)
Dimensions	4.03 (l) x 3.91 (h) x 2.08 (w)
Ambient Light Level Range	30-2500 Lux
Certification	UL8750 Safety Regulations IP66 FCC Part 15 Class B Surge Protection L-N 1KV, L&N- PE 2KV

115 S State St, Suite B  
Lindon, UT 84042

T: (801) 349-1200  
F: (801) 614-7100  
Sales@ILLUMRA.com

This device or certain aspects thereof is protected by at least one U.S. or international patent or has at least one such patent application pending.

ILLUMRA is a trademark of Ad Hoc Electronics, LLC. Other trademarks herein are the property of their respective owners