


AST-03208MR-R 32mm Speaker

3541 Stop Eight Road • Dayton, Ohio 45414



Product Overview


- 32mm diameter speaker with Neodymium magnet for 82 dB sensitivity
- 0.1W continuous, 0.2W maximum power handling and 8Ω impedance
- Mylar cone for wide frequency response
- Thru hole design and wave solderable for PCB mount

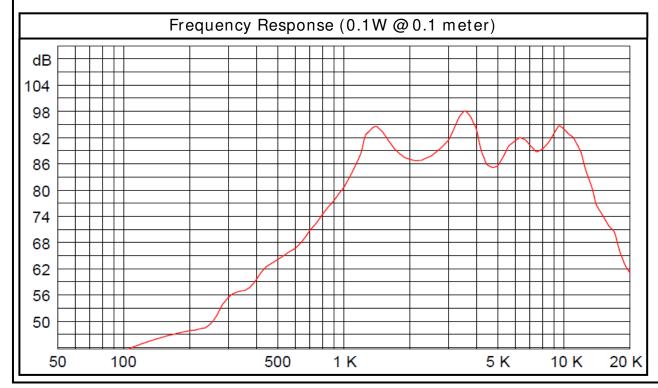









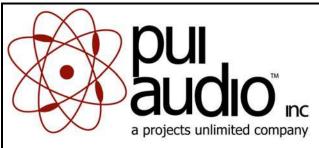

AST-03208MR-R 32mm Speaker

Mechanical and Environment Testing		
Test Description	Test Condition	
High Temperature	55°C with random humidity for 96 hours	
Low Temperature	-20°C with random humidity for 96 hours	
Humidity	40°C with 90% to 95% relative humidity for 96 hours	
Vibration	1.5 mm movement modulated at 10 to 55 Hz for 2 hours	
Drop Test	75 cm free fall onto 40 mm thick board, 10 cycles	
Temperature Cycle Test	-20°C to 55°C, 5 cycles (refer to Temperature Cycle Test Graph)	
After tests, speaker shall rest for 1 hours. SPL shall not deviate ± 3 dB from pre-test measurement.		

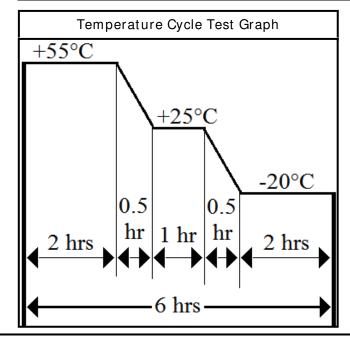

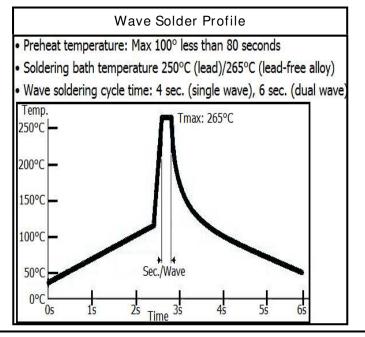



SPECIFICATIONS			
PARAMETERS	VALUES	UNITS	
RATED INPUT POWER	0.1	W	
MAX INPUT POWER	0.2	W	
IMPEDANCE	8 ± 20%	OHM	
OUTPUT SPL @ 0.1W/0.5M	00 + 0	dBA	
(AT 1.2, 1.4, 1.6, 1.8 kHz)	82 ± 3		
DISTORTION (MAX.)	5%	-	
RESONANT FREQUENCY	1,500 ± 20%	Hz	
FREQUENCY RANGE	500 ~ 20,000	Hz	
HOUSING MATERIAL	NORYL	-	
CONE MATERIAL	MYLAR	-	
MAGNET MATERIAL	NdFeB	-	
OPERATING TEMPERATURE	-20 ~ +60	°C	
WEIGHT	10	grams	
		· · · · · · · · · · · · · · · · · · ·	

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

	REVISION HISTORY			
LTR	DESCRIPTION	DATE	APPROVED	
-	RELEASED FROM ENGINEERING	7/8/2006		
Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	10/27/2008	B.R.	
В	ADDED NOTE 4	1/5/2011	B.R.	
С	REVISED MAGNET MATERIAL	6/28/2011	C.W.	

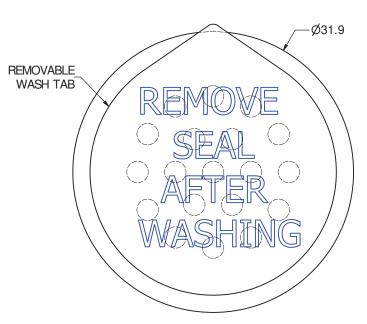

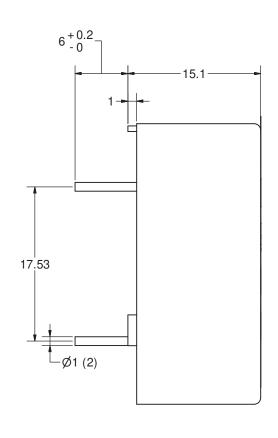

Designed by



NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.
- 4. HAND SOLDER ONLY.

	UNLESS OTHERWISE SPECIFIED:		
	DIMENSIONS ARE IN MILLIMETERS.		
	TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A 3	
AST-03208MR-R.idv		MR-R.idw	

B.R.	4/ // 2006	B.I
(A)	pui.	
	audic a projects unlimited co) Inc

Date

Checked by	Date	Approved by	Date	Drawn Date
B.R.	4/7/2006	E.P.	4/7/2006	10/27/2008
107 0000117				

AST-03208MR-R
Speaker

Speaker

Speaker

Sheet
1 / 1

4