THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

1. DO-IT-YOURSELF (DIY) 4mm STACKING BANANA PLUG, BUTTON ATTACHMENT (SOLDERLESS).

2. SPECIFICATIONS:

INSULATOR BODY: POLYAMIDE (NYLON) PLUG BODY: BRASS, NICKEL PLATED

CONTACT SPRING: BERYLLIUM COPPER ALLOY, NICKEL PLATED

3. RATING:


IEC: <33 V AC / <70 V DC VOLTAGE: 1,200 V NON-HANDHELD

CURRENT: 36 A MAX.

TEMPERATURE: -20° C TO $+80^{\circ}$ C.

4. MAXIMUM WIRE SIZES:

CONDUCTOR: Ø.090 (12AWG) INSULATION: Ø.156 (5/32") STRIP LENGTH: .25 (6.4)



- COLOR: 0 - BLACK


2 - RED


4 - YELLOW

5 - GREEN

6 - BLUE

9 - WHITE



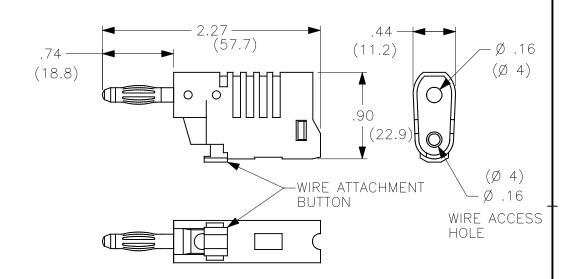

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	CONTRACT NO.			\- 1 T-	-4 []-	-4!-		22020 Covi Donah Darkaya	
		TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING				Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610					
			APPROVALS	DATE	TITLE						
			drawn WDH	7/11/99		DIY 4mm STACKING PLUG,					
		MATERIAL	CHECKED			BUTTON ATTACHMENT					
		FINISH	ENGR.		SIZE	CAGE CODE	4.5	DWG. NO.		01600	REV.
NEXT ASSY	USED ON		DESIGN ACTIVITY		A	43F	45	P201600 A			
APPLICATION					SCALE 1:1			SHEET 1 OF 1		1	