



Electrical Specifications

Center Frequency: 430 MHz
Bandwidth: 50 MHz
Pass Band: 405-455 MHz
Insertion Loss: 2.0 dB Max
Return Loss: 15 dB Min
Rejection: ≥ 30 dB @ 390 MHz
 ≥ 30 dB @ 470 MHz
Power Handling: 10 W


Mechanical

Connector Type: SMA (F)
Dimensions: 4.69 x 3.19 x 2.76 Inches

Environmental

Operating Temperature: -40 to +85° C
Storage Temperature: -50 to +95° C
Shock: 20 G. 11 ms
Vibration: 20 G. 5 to 200 MHz

Outline Drawing:

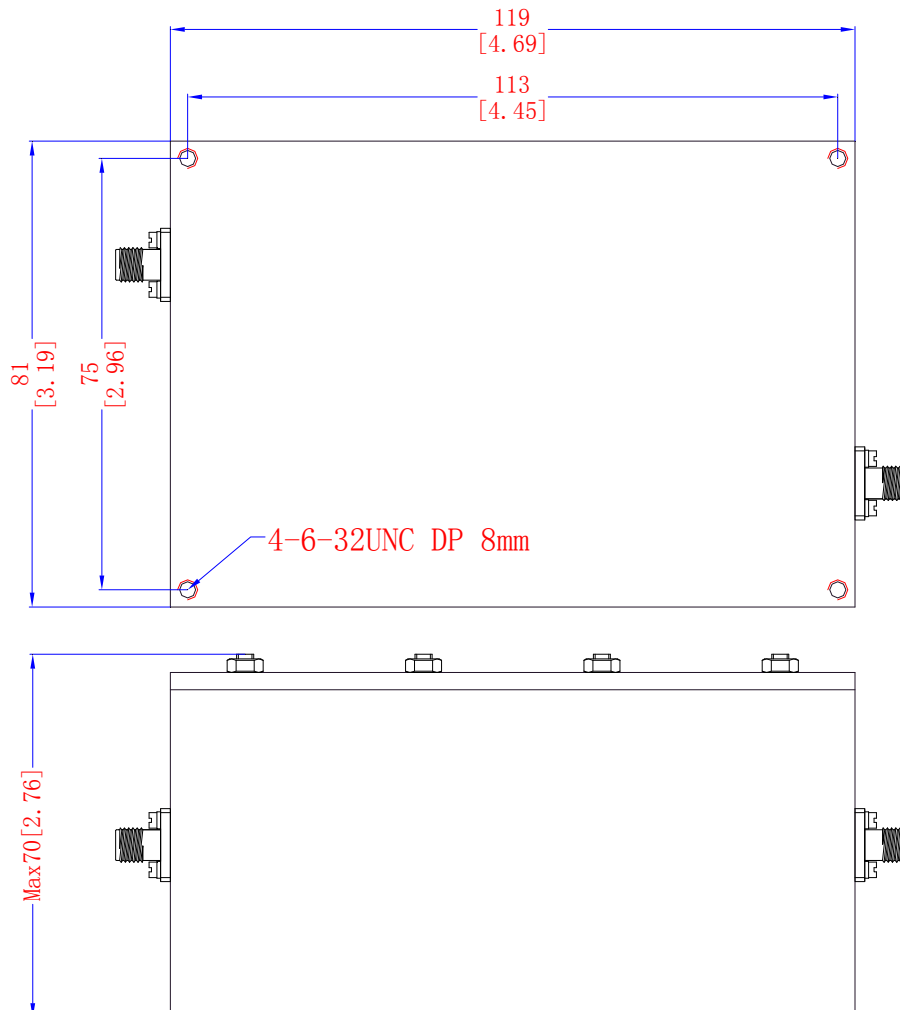



Response Plot:

