

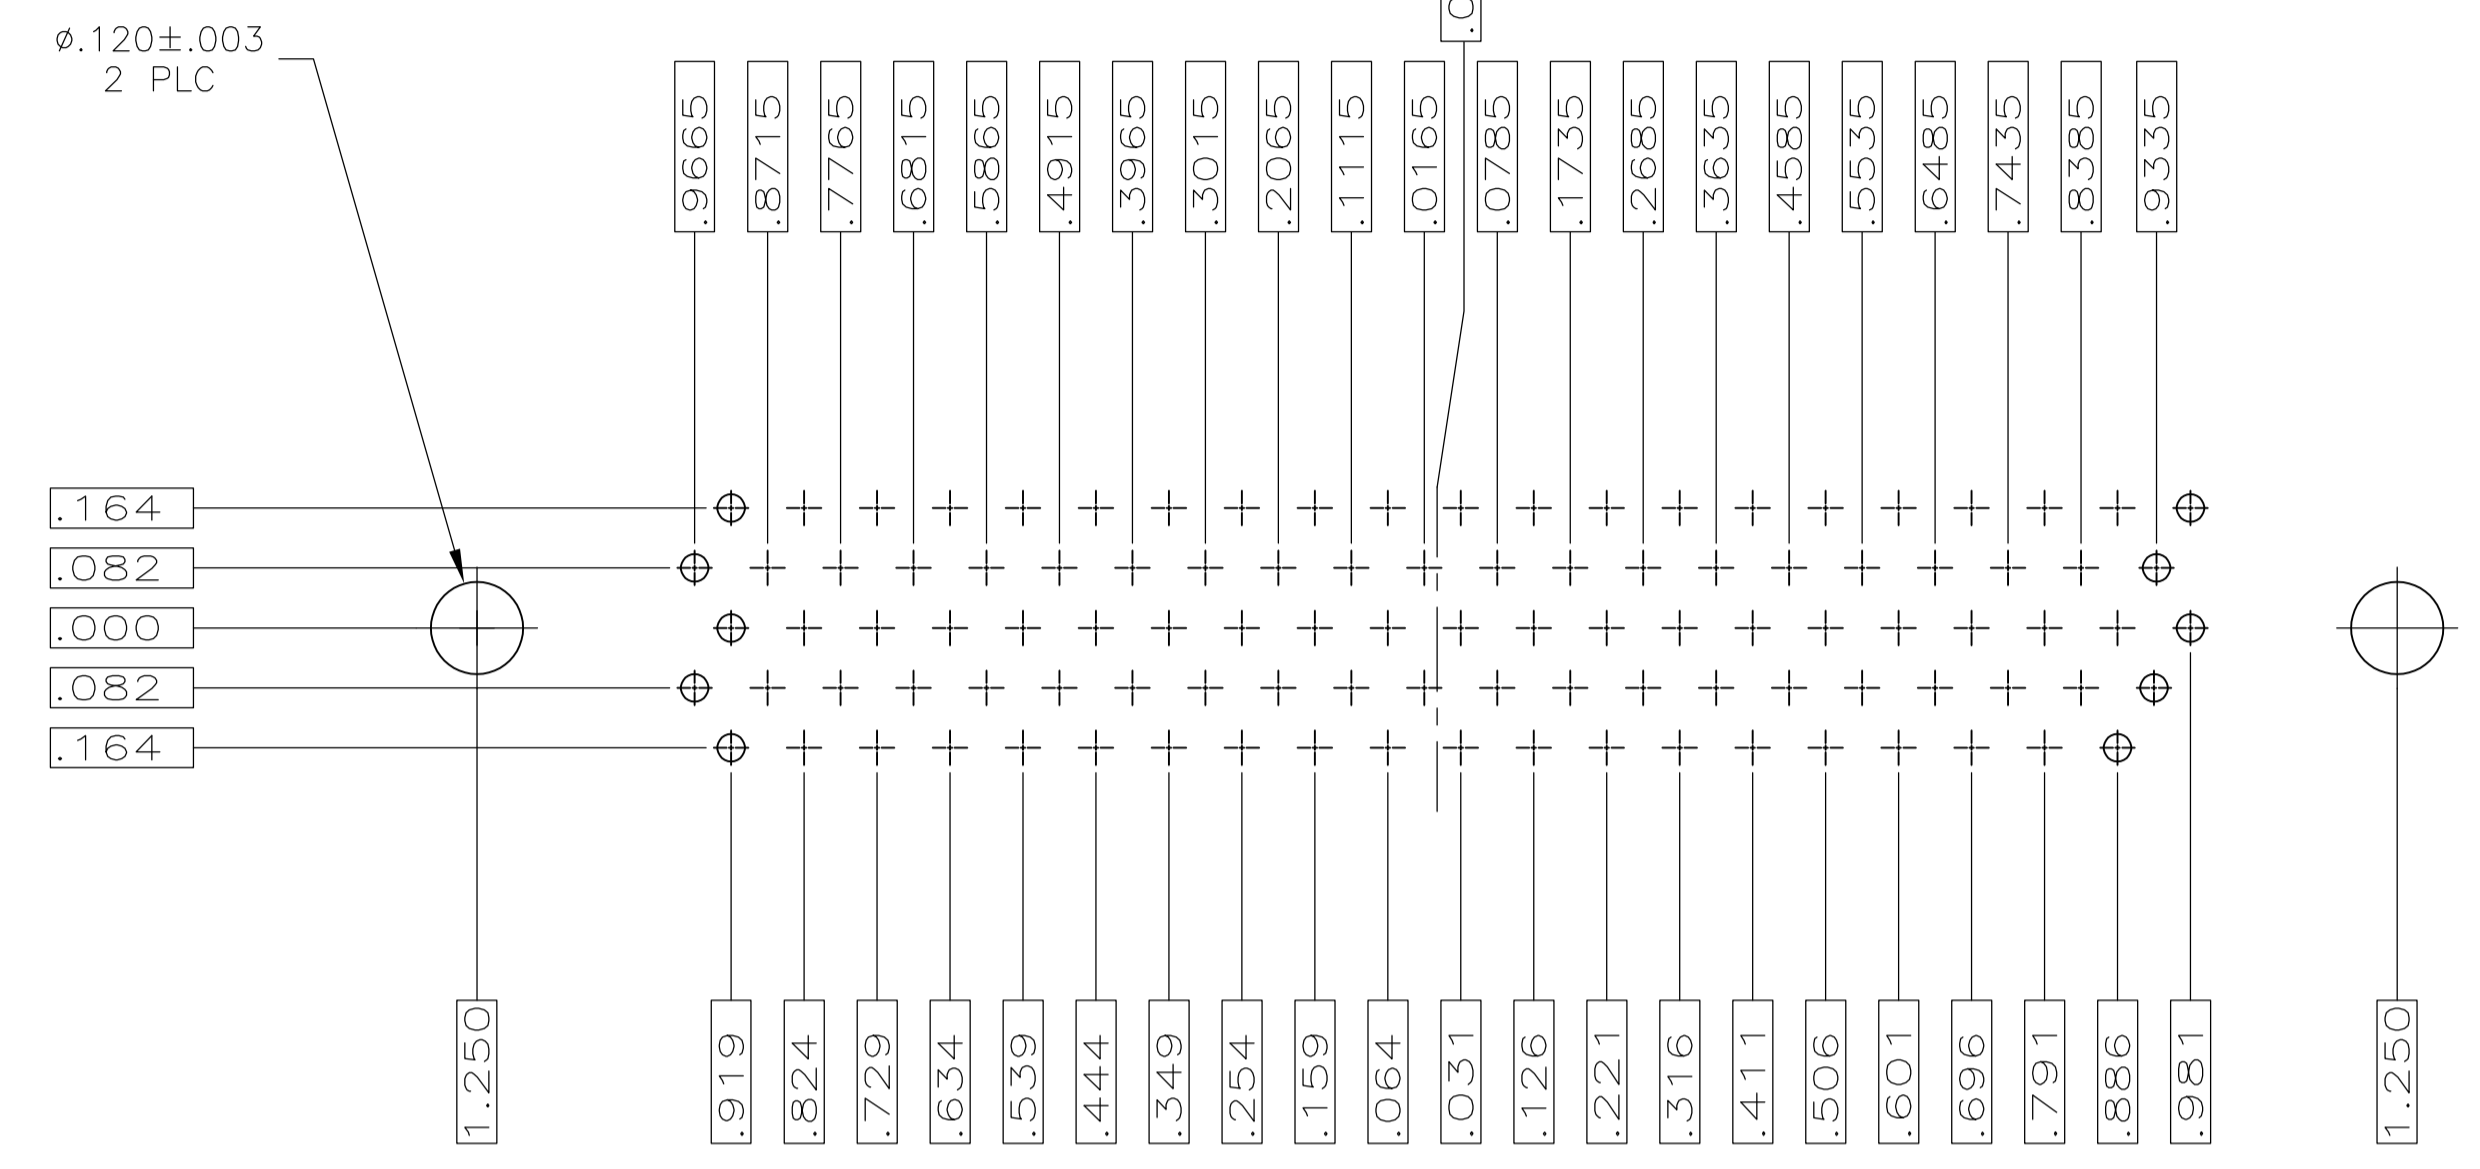
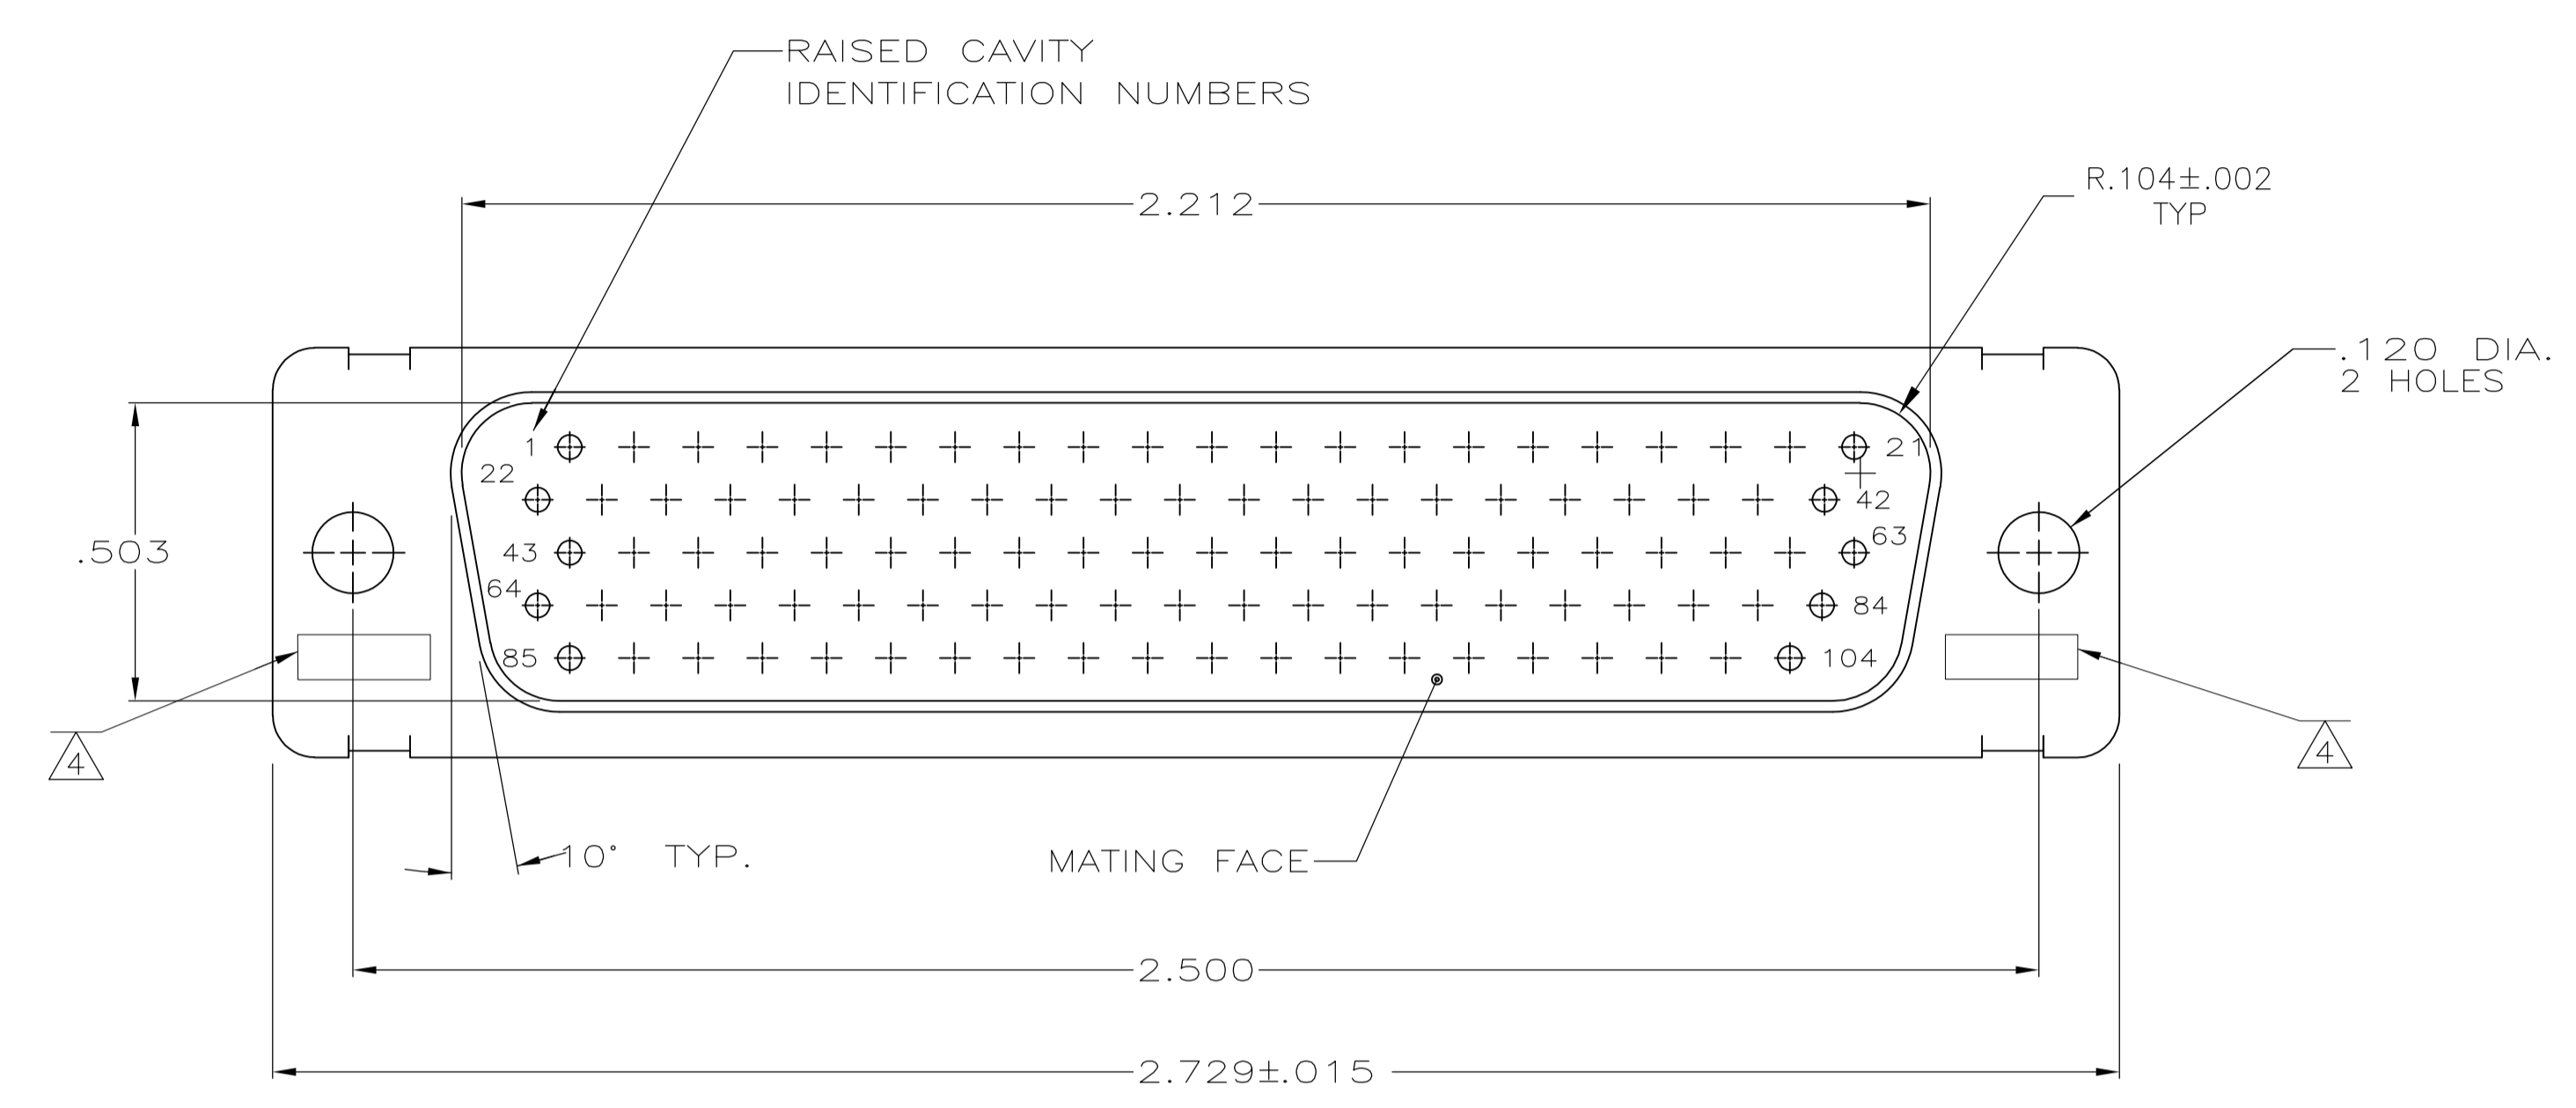


LOC		DIST		REVISIONS			
P	LTR	REVISED PER	ECO	DATE	DN	APVD	
N		REVIS	ECO-14-006481	12MAY2014	MGM	CT	

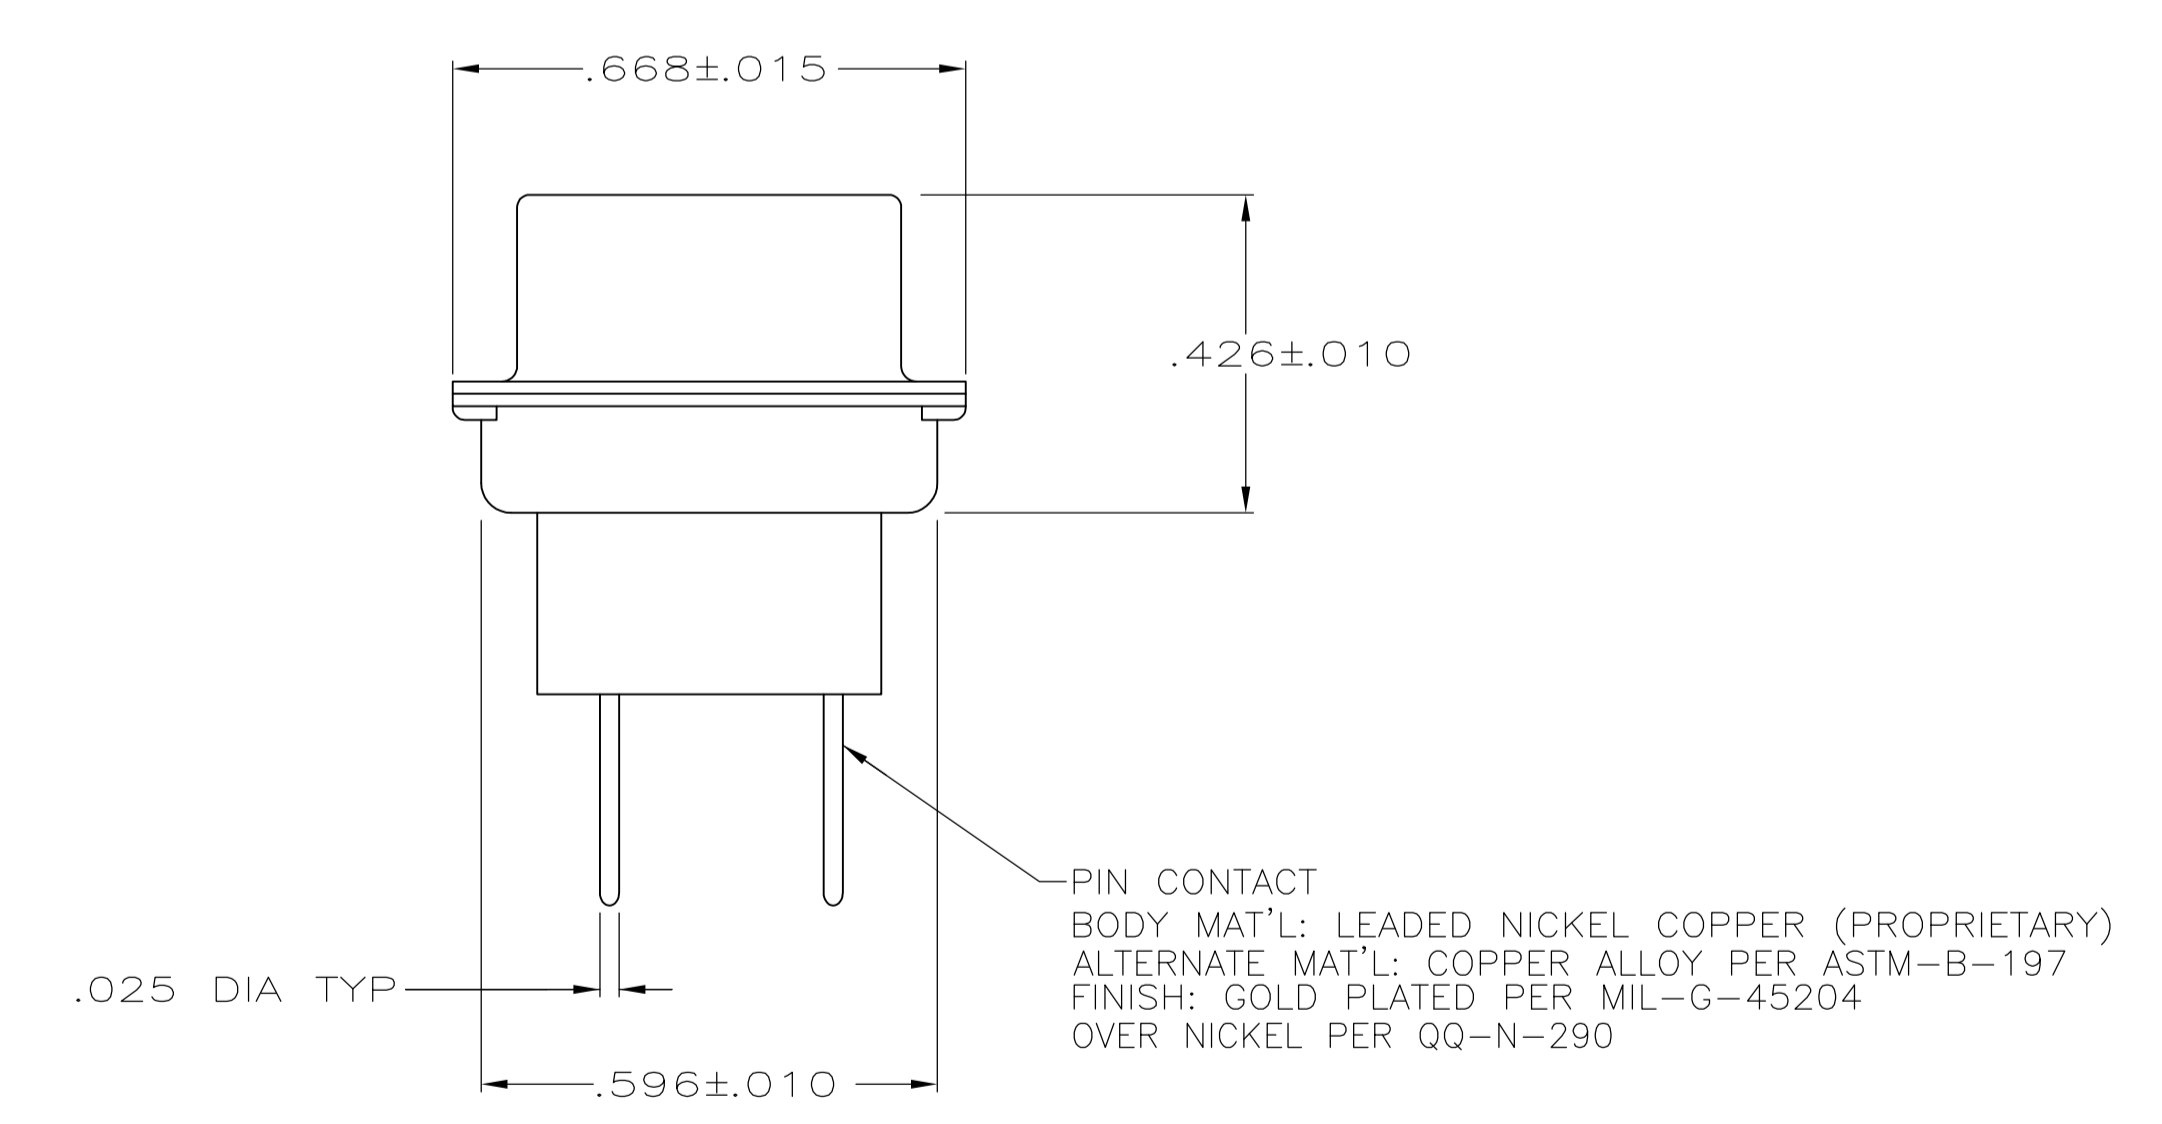

RECOMMENDED P.C. BOARD LAYOUT

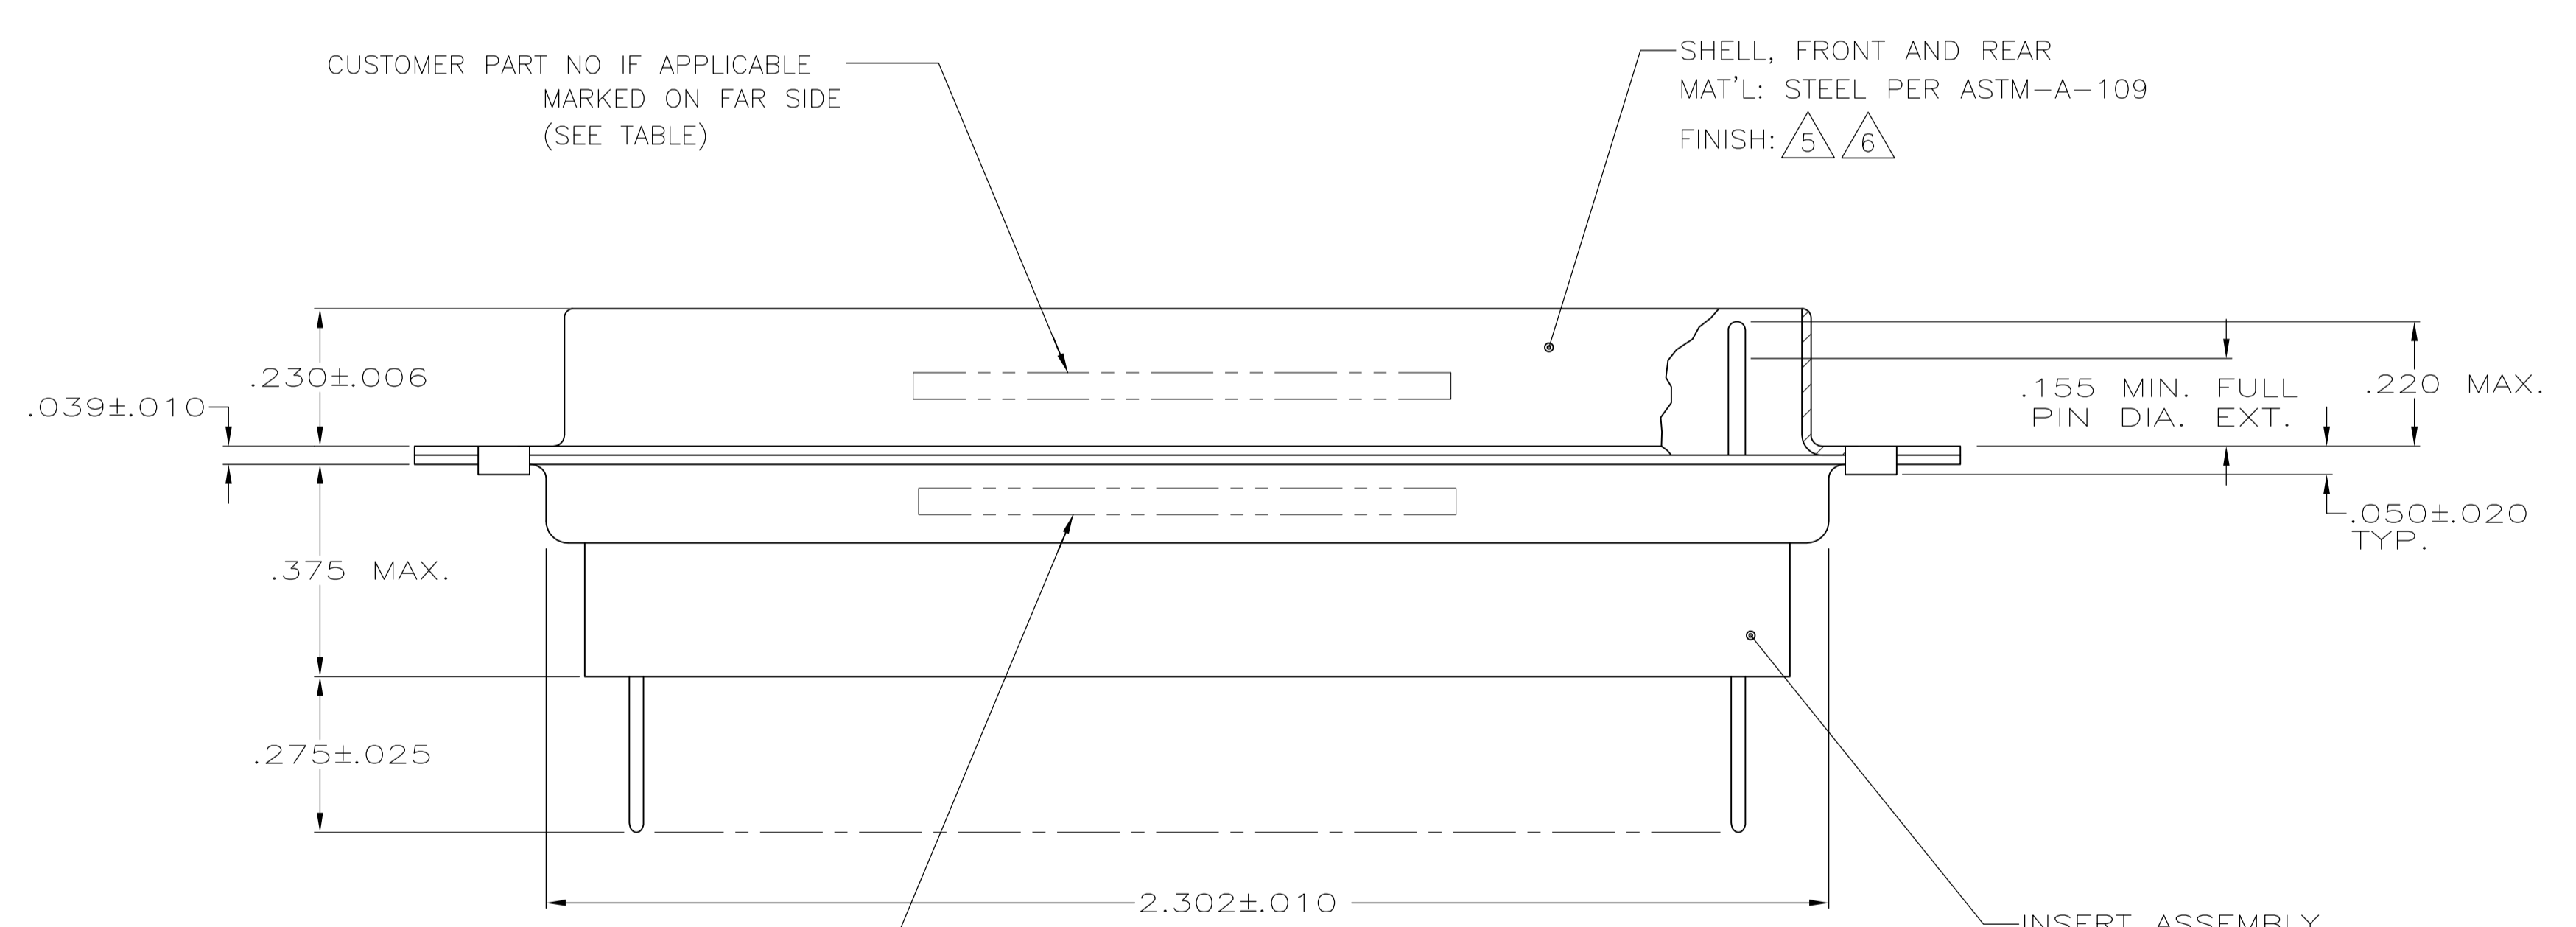

- .040 DIA HOLE IS RECOMMENDED FOR P.C. BOARD
- CONNECTOR MATES WITH ANY AMP 104 POSN RECEPTACLE
- REPLACEMENT CONTACT AMP# 207683-8
- UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL.
- FINISH: CADMIUM PER QQ-P-416
- FINISH: ZINC PLATED PER ASTM-B-633, .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+)

---	PLATED PER $\triangle 6$	5-208871-1
97942-1A21084G01	PLATED PER $\triangle 5$	208871-3
---	PLATED PER $\triangle 5$	208871-1
CUSTOMER PART NUMBER	DESCRIPTION	PART NO.
THIS DRAWING IS A CONTROLLED DOCUMENT.		
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD
0 PLC	± .005	
1 PLC	± .005	
2 PLC	± .005	
3 PLC	± .005	
4 PLC	± .005	
ANGLES	± .005	
MATERIAL SEE CALLOUTS	FINISH SEE CALLOUTS	WEIGHT
CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV N