


COIL: @ 25°C
 RESISTANCE _____ 1350 OHMS ± 10%
 NOMINAL VOLTAGE _____ 26.5 VDC
 MUST OPERATE _____ 13.5 VDC

 MUST RELEASE _____ 8.1 VDC MAX, 1.5 VDC MIN.

ENVIRONMENT:
 VIBRATION _____ 10 _____ CPS TO _____ 3000 _____ CPS @ _____ 30 _____ g's
 SHOCK _____ 75 _____ g's _____ 6 _____ MS. DURATION
 TEMPERATURE _____ -65 _____ °C TO _____ +125 _____ °C
 NOTES: _____ OPERATE & RELEASE 4 MS MAX.
 _____ BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

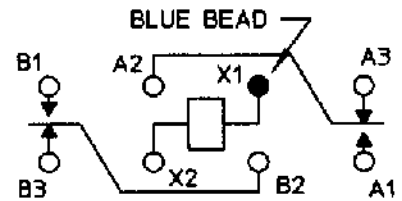

TERMINAL VIEW

CONTACT RATING: _____ LOW LEVEL TO
 _____ 2 AMPS 28 VDC RESISTIVE
 _____ 50,000 OPERATIONS

DR. _____ R.B. 8/25/97 _____ CK.GqH 9/20/99



CUST. _____ OPL
 CUST. NO. _____ M39016/13-060L REV. _____

'3SBC' RELAY

3SBC1506A2