
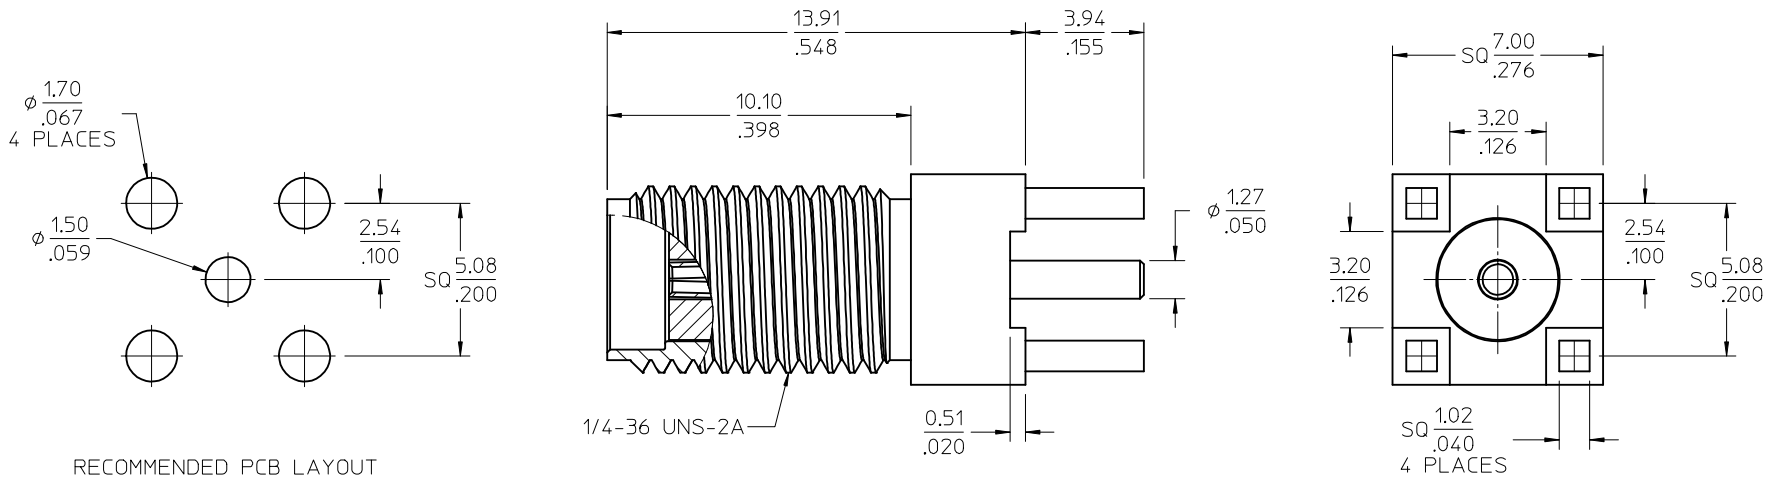


MATERIALS AND FINISHES:

BODY BRASS
PLATED NICKEL

CONTACT BERYLLIUM COPPER
PLATED GOLD

INSULATOR TEFLON



RECOMMENDED PCB LAYOUT

73251-6020	TRAY
PART NO	PACKAGING
PS-89675-3460	ELEC/MECH PERFORMANCE
MIL-STD-348A, FIG. 310.2	INTERFACE
SPECIFICATION	DESCRIPTION

A	2013/02/05	CHG:NEW RELEASE PER PDR13021267 EC NO: URF:2013-0509 DRW:RYEH CHKD: APPR:MHUANG	2013/03/29 DESCRIPTION 2013/03/29	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± .005 ± .005 3 PLACES ± .005 ± .005 2 PLACES ± .005 ± .005 1 PLACE ± .005 ± .005 0 PLACE ± .005 ± .005 ANGULAR ± 2 °	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
				mm		8:1	METRIC		
				INCH					
				MM/IN					
						DRAWN BY	DATE	TITLE	
						RYEH	2013/02/05	SMA JACK STR PCB TH	
						CHECKED BY	DATE	WITH SQ 7.0 BODY	
						VINCENT	2013/02/05	SMA-J/PCB	
						APPROVED BY	DATE	molex	
						MHUANG	2013/03/29		
						MATERIAL NO.	DOCUMENT NO.	SD-73251-602	SHEET NO.
						SEE TABLE			1 OF 1
						SIZE	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
						C			