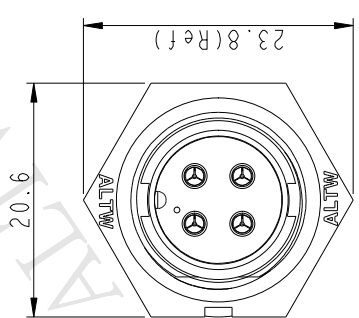
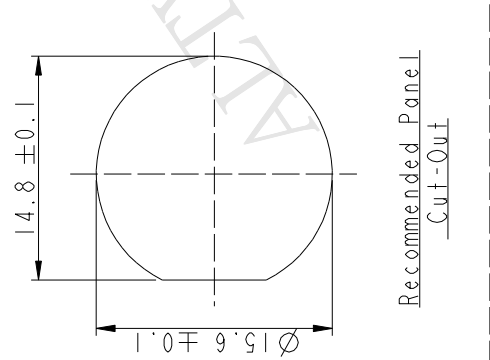
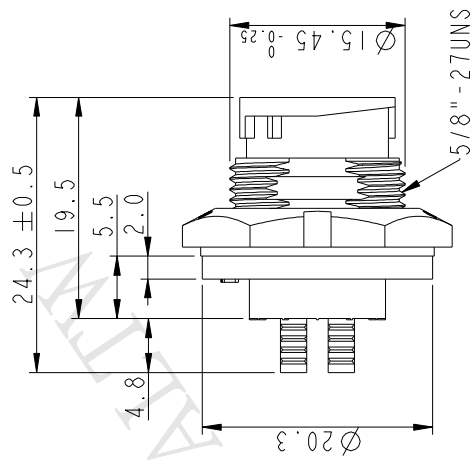

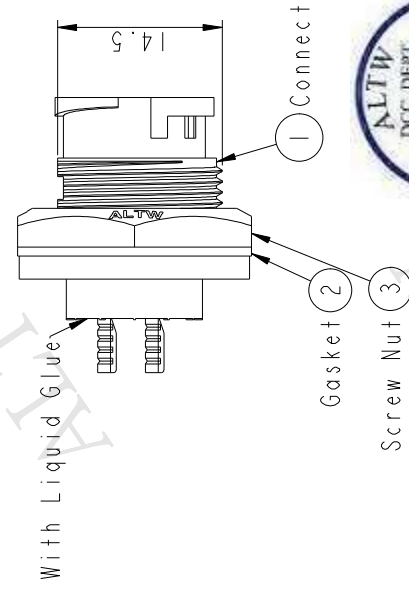
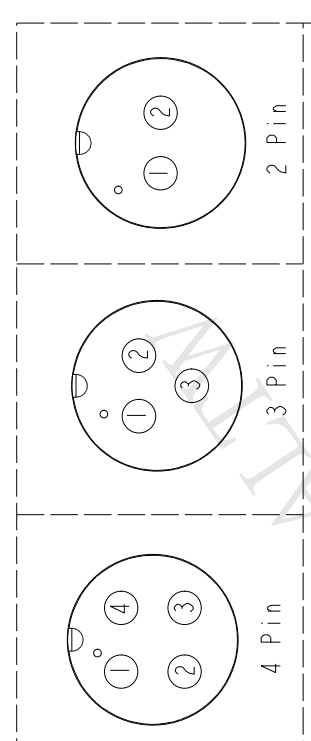




8	7	6	5	4	3	2	1
DESCRIPTION		SIGN	DATE	ECN NO.	REV.	ECN NO.	DATE
23.8 (Ref)		20.6					
							
				<p>ABB - XXPMS - LC7001</p> <p>02 : 2 Pin</p> <p>04 : 4 Pin</p>		<p>With Liquid Glue</p>	
<p>Note:</p> <ul style="list-style-type: none"> Ⓞ Important Dimension To Check. Waterproof Rate: IP67 Housing: Nylon+GF, Black Male Pin: Copper Alloy, Gold Plated Screw Nut: Nylon+GF, Black Gasket: Silicone, Gray Use with waterproof cap or dust cap Maximum Panel Thickness: 2.8mm Use without waterproof cap or dust Maximum Panel Thickness: 4.0mm 		<p>ITEM NO</p> <p>ABB - XXPMS - LC7001</p> <p>CUSTOMER</p>		<p>DATE</p> <p>Jinhai</p> <p>DATE</p> <p>Rensong</p> <p>DATE</p> <p>Jerry</p>		<p>DATE</p> <p>2015-07-0</p> <p>DATE</p> <p>2015-07-0</p> <p>DATE</p> <p>2015-07-0</p>	
<p>Amphenol LTW</p> <p>安費諾亮泰企業股份有限公司</p>		<p>STANDARD</p> <p>PANEL LOCK M CONN MPIN</p> <p>SCALE 3:2</p> <p>REV. A</p> <p>SHEET 1 OF 1</p> <p>MC-REV. A.1</p> <p>Ⓞ: Inspection item</p>		<p>UNIT: mm</p> <p>TOLERANCE</p> <p>.X ±0.25</p> <p>.XX ±0.1</p> <p>.XXX ±0.05</p> <p>ANGLES ±1°</p>		<p>Pin Assignments Front View</p>	