



KIT, AT SERIES, 12 POS. RECEPTACLE, CONTACTS, AND WEDGELOCK

AT04-12PA-KIT01

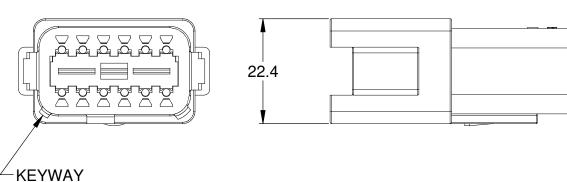



40.6

REFERENCE DIMENSIONS - ASSEMBLED

2 1 KIT CONTENTS 3

NOTES: UNLESS OTHERWISE SPECIFIED

(3) PLACES

1. MATERIAL:

HOUSING: THERMOPLASTIC; COLOR: GREY WEDGELOCK: THERMOPLASTIC; COLOR: GREEN

SEALS: SILICONE RUBBER

CONTACTS: COPPER ALLOY; NICKEL PLATED

- 2. SPECIFICATIONS:
 - 2.1 CURRENT RATING: 13 AMPS
 - 2.2 OPERATING TEMPERATURE: -55°C TO +125°C
 - 2.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 2.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.
 - 2.5 CONTACT MILLIVOLT DROP: 60 MILLIVOLT DROP @ 13 AMP TEST CURRENT.
 - 2.6 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
 2.7 CONNECTOR MATING CYCLE DURABILITY: 100 CYCLES

- 3. MATING PART: AT06-12SA* PLUG (* = MODIFICATIONS AND COLORS)
- 4. AVAILABLE HAND CRIMPER: CA-5D12
- 5. ALL COMPONENTS ARE ROHS COMPLIANT.
- 6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- 7 WIRE RANGE OF CONTACTS INCLUDED IN KIT: 16 20 AWG
- 8 CONTACT SIZE AND REAR SEAL WIRE RANGE:

CONTACT	MIN. INSUL.	MAX. INSUL.	TYPICAL	
SIZE	O.D.	O.D.	WIRE RANGE	
16	2.24 mm (.088 in)	3.68 mm (.145 in)	14 - 20 AWG	

	MATERIAL CLICT							
QUANTITY	PART NUMBER	DESCRIPTION	ITEM	-				
1	AT04-12PA	RECEPTACLE, 12 PIN, AT SERIES	1	!				
1	AW12P	P-WEDGELOCK, 12 POSITION, AT SERIES	2					
12	AT60-202-16141	CONTACT, PIN, SOLID, SIZE 16, 16-20 AWG	3	_				
				!				

				,	,		
QUANTITY	PART N	IUMBER		DE	DESCRIPTION		ITEM
		MA	TERI	ALS LIST			
UNLESS OTHERWISE SPECIFIED		SIGNATURES DATE		Amphonol			
All dimensions a Tolerances are a PL DEC +0.30	Fractions ±1/64 Angles ±1°	DRAWN: D.PARKS	19SEP13	Amphenol			
2 PL DEC ±0.15 3 PL DEC ±0.08		CHECKED:		Sine Systems - www.amphenol-sine.com			
3) Note reference = X MATERIAL SPECIFICATIONS: PROCESS SPECIFICATIONS: NEXT ASSY:		SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL		44724 Morley Drive			
				Clinton Township, MI 48036			
				KIT, AT SERIES, 12 POSITION RECEPTACLE, CONTACTS, AND WEDGELOCK			
				SCALE: NONE		SHEET 1 OF	1