

# FM-45

# SURFACE MOUNT CONTACTS

1.10"L x .49"W x .3"H Side Lead Surface Mount Type (with Super Stick adhesive tape)



Contact Size: 1.10"L x .49"W x .26"H

(28mm x 12.5mm x 6.5mm)

Standard Magnet Size: 1.10"L x .49"W x .26"H

(28mm x 12.5mm x 6.5mm)

Standard Gap: 1"(25.4mm)

Colors: White, Black, Brown, Gray

18"(457mm) 26 AWG Leads Standard

Longer leads available.

## Specifications


Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
FM-45	1"(25.4)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
FM-46B	.5"(12.7)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
FM-47C	.5"(12.7)	SPDT	SPDT	3	100	AC30/DC30	0.2

OPERATING TEMPERATURE: -40°C to +60°C

## Outline Dimensions

Unit: inch(mm)

### FM-45/FM-46B

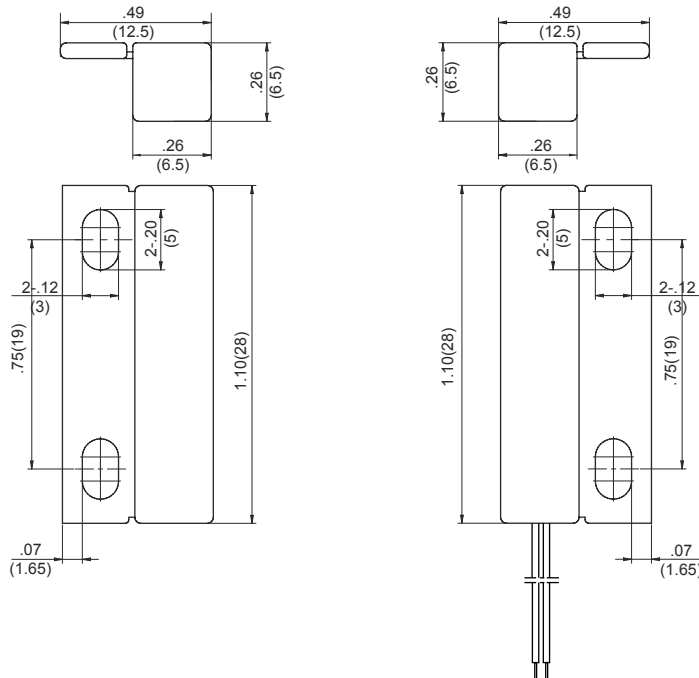


The Best Industry Guarantee Since 1984®  
**TANE ALARM PRODUCTS**

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040


Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

### FM-47C

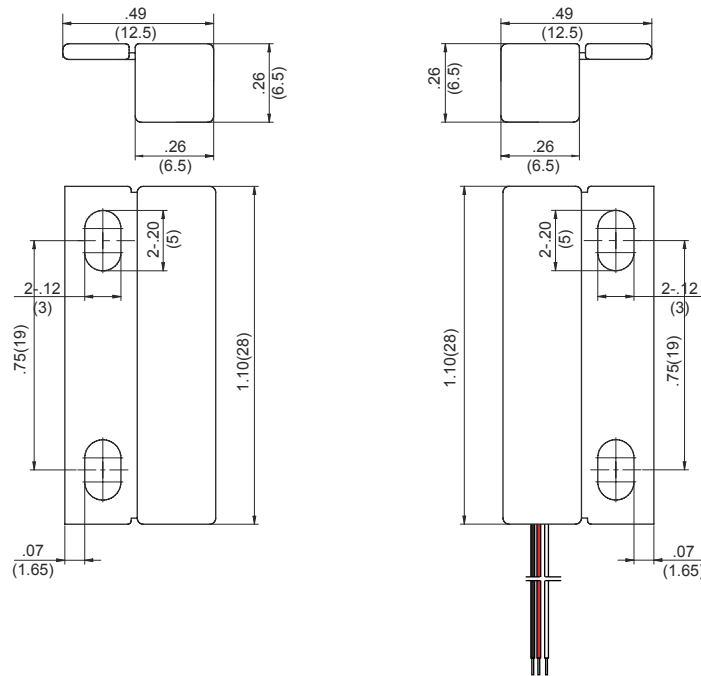

### FM-47C Wiring Diagram

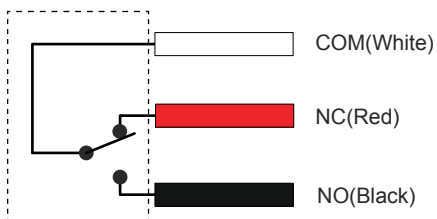

The Best Industry Guarantee Since 1984®

## TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com