

Wirewound Resistors, Industrial Power, Tubular, Ribwound (RB), Adjustable (RBEA, RBSA)



FEATURES


- High temperature silicone or vitreous enamel coatings
- Excellent for pulsing applications
- All welded construction
- Designed to meet heavy-duty requirements where space is at a premium
- Hardware mounting options and enclosures available
- Wirewound
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912


**RoHS
COMPLIANT**

| STANDARD ELECTRICAL SPECIFICATIONS | | | | | | |
|------------------------------------|---------------------|-------------------|------------------------------|----------------|----------------|--------|
| GLOBAL MODEL | HISTORICAL MODEL | POWER RATING W | RESISTANCE RANGE Ω | TOLERANCE % | TERMINAL STYLE | |
| | | | | | STANDARD | OPTION |
| RBEA0090 ⁽¹⁾ | 9-64- Ω RA | 90 | 0.014 to 25.3 | 10 | D | H |
| RBEA0100 ⁽¹⁾ | 12-56- Ω RA | 100 | 0.011 to 20.7 | 10 | F | H |
| RBEA0110 ⁽¹⁾ | 12-64- Ω RA | 110 | 0.014 to 26.8 | 10 | F | H |
| RBEA0120 ⁽¹⁾ | 12-72- Ω RA | 120 | 0.017 to 32.9 | 10 | F | H |
| RBEA0135 ⁽¹⁾ | 12-80- Ω RA | 135 | 0.020 to 39 | 10 | F | H |
| RBEA0150 ⁽¹⁾ | 18-64- Ω RA | 150 | 0.018 to 39 | 10 | F | H |
| RBEA0160 ⁽¹⁾ | 12-96- Ω RA | 160 | 0.027 to 51.3 | 10 | F | H |
| RBEA0175 ⁽¹⁾ | 18-72- Ω RA | 175 | 0.022 to 48.1 | 10 | F | H |
| RBEA0180 ⁽¹⁾ | 12-104- Ω RA | 180 | 0.030 to 57.4 | 10 | F | H |
| RBEA0220 ⁽¹⁾ | 18-96- Ω RA | 220 | 0.035 to 75 | 10 | F | H |
| RBEA0225 ⁽¹⁾ | 18-98- Ω RA | 225 | 0.036 to 77.2 | 10 | F | H |
| RBEA0240 ⁽¹⁾ | 18-104- Ω RA | 240 | 0.039 to 83.9 | 10 | F | H |
| RBEA0300 ⁽¹⁾ | 18-136- Ω RA | 300 | 0.055 to 120 | 10 | F | H |
| RBEA0375 ⁽¹⁾ | 18-168- Ω RA | 375 | 0.072 to 156 | 10 | F | H |
| RBEA0400 ⁽¹⁾ | 26-136- Ω RA | 400 | 0.062 to 149 | 10 | G | - |
| RBEA0420 ⁽¹⁾ | 18-188- Ω RA | 420 | 0.082 to 178 | 10 | F | H |
| RBEA0500 ⁽¹⁾ | 26-168- Ω RA | 500 | 0.083 to 200 | 10 | G | - |
| RBEA0550 ⁽¹⁾ | 26-188- Ω RA | 550 | 0.097 to 232 | 10 | G | - |
| RBSA0750 | 40-192- Ω RA | 750 | 0.130 to 158 | 10 | G | - |
| RBSA1000 | 40-240- Ω RA | 1000 | 0.176 to 209 | 10 | G | - |
| RBSA1500 | 40-320- Ω RA | 1500 | 0.248 to 294 | 10 | G | - |
| RBSA2000 | 52-320- Ω RA | 2000 | 0.300 to 380 | 10 | G | - |

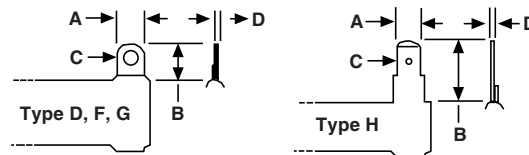
Note

⁽¹⁾ Vitreous enamel coating is standard (RBEA type), silicone coating is optional (RBSA type).

DIMENSIONS in inches (millimeters)


- For Terminal Data and Mounting Hardware, see www.vishay.com/doc?31811
- For Enclosures and Frames, see www.vishay.com/doc?31810

| GLOBAL MODEL | CORE DIMENSIONS (REF.) | | | A DISTANCE BETWEEN TERMINAL (REF.) | WEIGHT (TYP.) g |
|--------------|------------------------|---------------------|---------------------|---|-----------------------|
| | B LENGTH | C OUTER DIAMETER | D INNER DIAMETER | | |
| RBEA0090 | 4 (101.6) | 0.5625 (14.2875) | 0.3125 (7.9375) | 3.50 (88.9) | 65 |
| RBEA0100 | 3.5 (88.9) | 0.75 (19.05) | 0.5 (12.7) | 2.63 (66.675) | 58 |
| RBEA0110 | 4 (101.6) | 0.75 (19.05) | 0.5 (12.7) | 3.13 (79.375) | 62 |
| RBEA0120 | 4.5 (114.3) | 0.75 (19.05) | 0.5 (12.7) | 3.63 (92.075) | 68 |
| RBEA0135 | 5 (127) | 0.75 (19.05) | 0.5 (12.7) | 4.13 (104.775) | 75 |
| RBEA0150 | 4 (101.6) | 1.125 (28.575) | 0.75 (19.05) | 3.13 (79.375) | 127 |
| RBEA0160 | 6 (152.4) | 0.75 (19.05) | 0.5 (12.7) | 5.13 (130.175) | 95 |
| RBEA0175 | 4.5 (114.3) | 1.125 (28.575) | 0.75 (19.05) | 3.63 (92.075) | 140 |
| RBEA0180 | 6.5 (165.1) | 0.75 (19.05) | 0.5 (12.7) | 5.63 (142.875) | 100 |
| RBEA0220 | 6 (152.4) | 1.125 (28.575) | 0.75 (19.05) | 5.13 (130.175) | 165 |
| RBEA0225 | 6.125 (155.575) | 1.125 (28.575) | 0.75 (19.05) | 5.25 (133.35) | 175 |
| RBEA0240 | 6.5 (165.1) | 1.125 (28.575) | 0.75 (19.05) | 5.63 (142.875) | 200 |
| RBEA0300 | 8.5 (215.9) | 1.125 (28.575) | 0.75 (19.05) | 7.63 (193.675) | 265 |
| RBEA0375 | 10.5 (266.7) | 1.125 (28.575) | 0.75 (19.05) | 9.63 (244.475) | 300 |
| RBEA0400 | 8.5 (215.9) | 1.625 (41.275) | 1.125 (28.575) | 7.63 (193.675) | 410 |
| RBEA0420 | 11.75 (298.45) | 1.125 (28.575) | 0.75 (19.05) | 10.88 (276.225) | 336 |
| RBEA0500 | 10.5 (266.7) | 1.625 (41.275) | 1.125 (28.575) | 9.00 (228.6) | 525 |
| RBEA0550 | 11.75 (298.45) | 1.625 (41.275) | 1.125 (28.575) | 10.25 (260.35) | 535 |
| RBSA0750 | 12 (304.8) | 2.5 (63.5) | 1.75 (44.45) | 10.50 (266.7) | 1200 |
| RBSA1000 | 15 (381) | 2.5 (63.5) | 1.75 (44.45) | 13.50 (342.9) | 1500 |
| RBSA1500 | 20 (508) | 2.5 (63.5) | 1.75 (44.45) | 18.50 (469.9) | 1900 |
| RBSA2000 | 20 (508) | 3.25 (82.55) | 1.75 (44.45) | 18.50 (469.9) | 3900 |

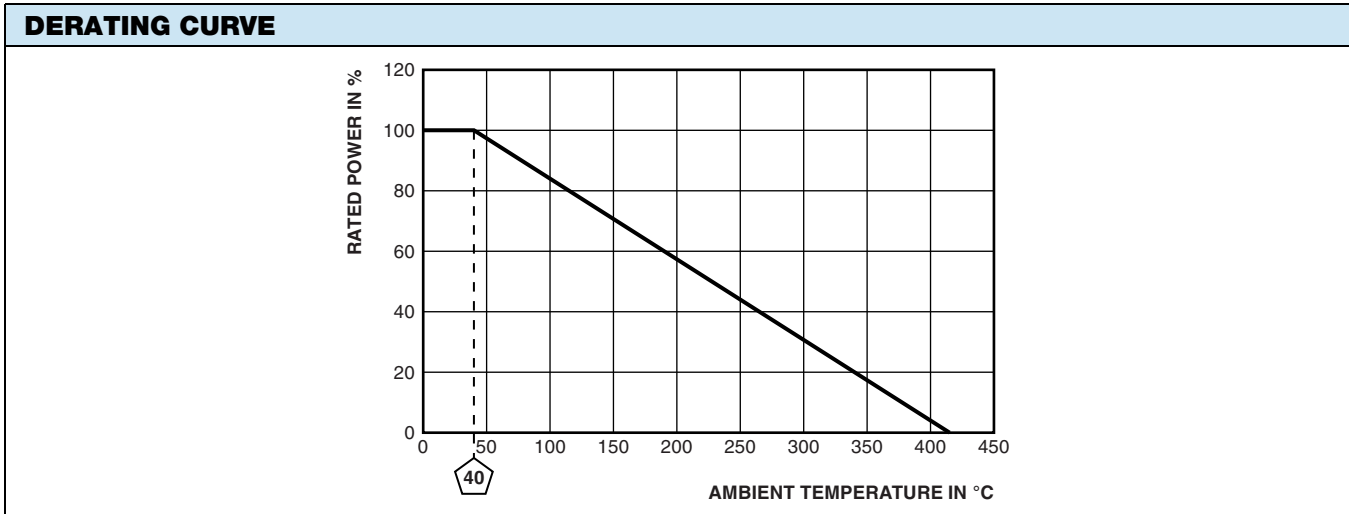
TERMINAL STYLE in inches (millimeters)


| DIMENSIONS | D (1/4" LUG) | F (5/16" LUG) | G (1/2" LUG) | H (1/4" SQC) |
|---------------|--------------|----------------|------------------|----------------|
| Width (A) | 0.25 (6.35) | 0.375 (9.525) | 0.5 (12.7) | 0.25 (6.35) |
| Height (B) | 0.5 (12.7) | 0.625 (15.875) | 0.9375 (23.8125) | 0.625 (15.875) |
| Diameter (C) | 0.17 (4.318) | 0.2 (5.08) | 0.26 (6.604) | 0.065 (1.651) |
| Thickness (D) | 0.02 (0.508) | 0.035 (0.889) | 0.046 (1.1684) | 0.032 (0.8128) |



| METRIC OPTIONS AVAILABLE | |
|---|--|
| Metric Hardware on Terminal Lugs | Use terminal designation "1" example: RBEA03001R000K1B00 |
| Metric Mounting Hardware | Vertical mount: use special designation "VM" example: RBEA03001R000K1BVM 1 high bracket: use special designation "1A" example: RBEA03001R000K1B1M 2 high bracket: use special designation "2A" example: RBEA03001R000K1B2M 3 high bracket: use special designation "3A" example: RBEA03001R000K1B3M 4 high bracket: use special designation "4A" example: RBEA03001R000K1B4M |

| TECHNICAL SPECIFICATIONS | | |
|--|---------------------|---|
| PARAMETER | UNIT | RESISTOR CHARACTERISTICS |
| Power rating | W | 90 to 2000 |
| Resistance range | Ω | 0.011 to 391 |
| Resistance tolerance | % | 10 |
| TCR | ppm/°C | $\pm 400, \pm 180, \pm 130, \pm 20$ (varies by wattage and resistance) |
| Operating temperature | °C | -55 to +415 |
| Temperature rise | °C | 375 above an ambient of 40 °C |
| Maximum altitude | f.a.s.l. (m.a.s.l.) | derate above 4921 f.a.s.l. (1500 m.a.s.l.) |
| Short-term overload (surge) | | 10 x rated power for 5 s |
| Surge windings | | available |
| Maximum working voltage | | $(P \times R)^{1/2}$ |
| Insulation resistance | Ω | 1M |
| Dielectric voltage | V _{RMS} | up to 1500 (upon request) |
| Creepage | inch (mm) | minimum 0.125 (3.175), typical (varies by wattage) |
| Terminal sleeves | | n/a |
| Inductance | μ H | 0.1 to 340 (varies by wattage and resistance) |
| Non-inductive winding | | consult factory: www.vishay.com/milwaukee/contact |
| Terminal strength | lb | 10 |
| Electrical or mechanical customization | | available: www.vishay.com/doc?31856 |



| MATERIAL SPECIFICATIONS | |
|-------------------------|--|
| Element | copper-nickel, nickel-chrome, iron-chrome-aluminum |
| Core | cordierite, steatite |
| Coating | special high temperature silicone or vitreous enamel |
| Standard terminals | nickel-iron |
| Part marking | value, date code, MRC |



| GLOBAL PART NUMBER INFORMATION | | | | | | | | | | | | | | | | | |
|--|---|---|---|-----------------|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Global Part Numbering example: RBEA030015R00JGB1A (RBSF1500-1A 15 5 % 1/2L B) | | | | | | | | | | | | | | | | | |
| R | B | E | A | 0 | 3 | 0 | 0 | 1 | 5 | R | 0 | 0 | J | G | B | 1 | A |
| GLOBAL MODEL | RESISTANCE VALUE | TOLERANCE | TERMINAL | PACKAGING CODE | SPECIAL | | | | | | | | | | | | |
| RBEA0300 (see "Standard Electrical Specifications" table above for additional P/N's) | R = Decimal K = Thousand R1500 = 0.15 Ω 1K500 = 1.5 kΩ | J = ± 5.0 % K = ± 10 % | D = 1/4" lug F = 3/8" lug G = 1/2" lug H = 1/4" single quick-connect | B = Bulk | 00 = Standard SW = Surge winding CP = Push in clips (bulk) CA = Push in clips (assembled) VT = Vertical mount 1A = 1 high bracket zinc plated steel 2A = 2 high bracket zinc plated steel 3A = 3 high bracket zinc plated steel 4A = 4 high bracket zinc plated steel Note 2A, 3A, and 4A assemblies: include identical resistors only wiring to be supplied by customer reference CS series for further customization Note 3A and 4A limitations: brackets fit 40 W to 550 W RB resistors | | | | | | | | | | | | |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.