

Type NHR – Slimpack™, 3000 hr@150 °C, Aluminum Electrolytic



Featuring high capacitance at high voltage and temperature, Type NHR-Slimpack™ offers considerable size and cost advantages over series-parallel banks of wet tantalum capacitors. Their applications in down-hole tools, military, and aerospace allow for solutions that use fewer components, lower weight, lower cost and improved reliability compared with banks of wet tantalum capacitors. Their rugged construction withstands vibration up to 80g.

Highlights

- Alternative to banks of wet tantalum capacitors
- No voltage derating required at 150 °C
- Rugged, stainless steel case
- Near hermetic seal, prevents dry-out
- Just 0.5" in height, by 1.0" wide (available in 4 lengths)
- High capacitance retention at low voltage, -55 °C

Specifications

Temperature Range	-55 °C to +150 °C																																																									
Rated Voltage Range	75 Vdc to 300 Vdc																																																									
Capacitance Range	60 µF to 960 µF																																																									
Capacitance Tolerance	20%																																																									
Leakage Current	≤ 0.006 CV µA, @ 25 °C and 5 mins.																																																									
Ripple Current Multipliers	<p>Case Temperature</p> <table border="1"> <thead> <tr> <th></th> <th>65</th> <th>85</th> <th>105</th> <th>125</th> <th>150</th> </tr> </thead> <tbody> <tr> <td>0-250 Vdc</td> <td>5.448</td> <td>5.221</td> <td>4.767</td> <td>4.313</td> <td>2.27</td> </tr> <tr> <td>300 Vdc</td> <td>4.767</td> <td>4.54</td> <td>4.313</td> <td>3.859</td> <td>2.27</td> </tr> </tbody> </table> <p>Ambient Temperature, No Heatsink</p> <table border="1"> <thead> <tr> <th></th> <th>65</th> <th>85</th> <th>105</th> <th>125</th> <th>150</th> </tr> </thead> <tbody> <tr> <td>0-250 Vdc</td> <td>2.4</td> <td>2.3</td> <td>2.1</td> <td>1.9</td> <td>1</td> </tr> <tr> <td>300 Vdc</td> <td>2.1</td> <td>2</td> <td>1.9</td> <td>1.7</td> <td>1</td> </tr> </tbody> </table> <p>Frequency</p> <table border="1"> <thead> <tr> <th></th> <th>50 Hz</th> <th>60 Hz</th> <th>120 Hz</th> <th>500Hz</th> <th>1 KHz</th> <th>20 KHz</th> </tr> </thead> <tbody> <tr> <td>0-250 Vdc</td> <td>0.65</td> <td>0.75</td> <td>1</td> <td>1.5</td> <td>1.8</td> <td>2.1</td> </tr> <tr> <td>300 Vdc</td> <td>0.65</td> <td>0.7</td> <td>1</td> <td>1.3</td> <td>1.4</td> <td>1.6</td> </tr> </tbody> </table>		65	85	105	125	150	0-250 Vdc	5.448	5.221	4.767	4.313	2.27	300 Vdc	4.767	4.54	4.313	3.859	2.27		65	85	105	125	150	0-250 Vdc	2.4	2.3	2.1	1.9	1	300 Vdc	2.1	2	1.9	1.7	1		50 Hz	60 Hz	120 Hz	500Hz	1 KHz	20 KHz	0-250 Vdc	0.65	0.75	1	1.5	1.8	2.1	300 Vdc	0.65	0.7	1	1.3	1.4	1.6
	65	85	105	125	150																																																					
0-250 Vdc	5.448	5.221	4.767	4.313	2.27																																																					
300 Vdc	4.767	4.54	4.313	3.859	2.27																																																					
	65	85	105	125	150																																																					
0-250 Vdc	2.4	2.3	2.1	1.9	1																																																					
300 Vdc	2.1	2	1.9	1.7	1																																																					
	50 Hz	60 Hz	120 Hz	500Hz	1 KHz	20 KHz																																																				
0-250 Vdc	0.65	0.75	1	1.5	1.8	2.1																																																				
300 Vdc	0.65	0.7	1	1.3	1.4	1.6																																																				
Low Temperature Characteristics	Impedance ratio: Z-55 °C/Z+25 °C @ 120 Hz ≤ 3 (75 - 300 Vdc)																																																									
Load Life Test	3000 h at rated voltage @ 150 °C Δ Capacitance +/- 10% ESR 200% of limit ≤ 0.004 CV µA, @ 25 °C and 5 mins.																																																									
Shelf Life Test	500 h @ 150 °C Capacitance 100% of limit ESR 100% of limit ≤ 0.006 CV µA, @ 25 °C and 5 mins.																																																									
Vibration <i>Mounting: Vibration capability is dependent upon mounting</i>	MIL-STD-202, Meth. 204, Sine Swept. IEC 60068-2-6 JK Case = 80g All Others = 50g																																																									
Vibration Test	<p>Level The specimens, while deenergized or operating under the load conditions specified, shall be subjected to the vibration amplitude, frequency range, and duration specified for each case size.</p> <p>Amplitude The specimens shall be subjected to a simple harmonic motion having an amplitude of either 0.06-inch double amplitude (maximum total excursion) or peak level specified above (XXg peak), whichever is less. The tolerance on vibration amplitude shall be ±10 percent.</p> <p>Frequency Range The vibration frequency shall be varied logarithmically between the approximate limits of 10 to 2,000 Hz.</p> <p>Sweep Time and Duration The entire frequency range of 10 to 2,000 Hz and return to 10 Hz shall be traversed in 20 minutes. This cycle shall be performed 12 times in each of three mutually perpendicular directions (total of 36 times), so that the motion shall be applied for a total period of approximately 12 hours. Interruptions are permitted provided the requirements for rate of change and test duration are met.</p>																																																									

Type NHR – Slimpack™, 3000 hr@150 °C, Aluminum Electrolytic

Higher Reliability	All NHR capacitors are subjected to a minimum of 100 percent of the dc rated voltage at 150 °C for 48 hours minimum but not to exceed 96 hours. During this test, capacitors shall be adequately protected against temporary voltage surges of 10 percent or more of the test voltage. After burn-in, the capacitors shall be returned to room ambient conditions and the dc leakage, capacitance, and ESR shall be measured with respect to specified limits.																																
Thermal Resistance	<table border="1"> <thead> <tr> <th rowspan="2">Large Sides Heatsinked</th> <th rowspan="2">Case Length Insulation</th> <th>1.5"</th> <th>2.0"</th> <th>2.5"</th> <th>3.0"</th> </tr> <tr> <th>°C/W</th> <th>°C/W</th> <th>°C/W</th> <th>°C/W</th> </tr> </thead> <tbody> <tr> <td rowspan="2">one</td> <td>None</td> <td>6.6</td> <td>4.8</td> <td>3.8</td> <td>3.1</td> </tr> <tr> <td>Polyester</td> <td>7.2</td> <td>5.3</td> <td>4.2</td> <td>3.4</td> </tr> <tr> <td rowspan="2">both</td> <td>None</td> <td>4.4</td> <td>3.1</td> <td>2.4</td> <td>2</td> </tr> <tr> <td>Polyester</td> <td>4.7</td> <td>3.3</td> <td>2.6</td> <td>2.2</td> </tr> </tbody> </table>	Large Sides Heatsinked	Case Length Insulation	1.5"	2.0"	2.5"	3.0"	°C/W	°C/W	°C/W	°C/W	one	None	6.6	4.8	3.8	3.1	Polyester	7.2	5.3	4.2	3.4	both	None	4.4	3.1	2.4	2	Polyester	4.7	3.3	2.6	2.2
Large Sides Heatsinked	Case Length Insulation			1.5"	2.0"	2.5"	3.0"																										
		°C/W	°C/W	°C/W	°C/W																												
one	None	6.6	4.8	3.8	3.1																												
	Polyester	7.2	5.3	4.2	3.4																												
both	None	4.4	3.1	2.4	2																												
	Polyester	4.7	3.3	2.6	2.2																												
ESL	≤30 nH measured 1/4" from case at 1 MHz																																
Typical Weight	Case JK = 30 Case JA = 39 Case JH = 48 Case JB = 57																																
Terminals	18 AWG copper wire with 60/40 tin-lead electroplate, 20 amps max																																
Case Material	Stainless Steel																																
Ripple Current Capability	The ripple current capability is set by the maximum permissible internal core temperature, 153 °C and a max ΔT of 30°C.																																
Air Cooled	The ripple currents in the ratings tables are for 150 °C case temperatures. For air temperatures without a heatsink use the multipliers Ambient Temperature, No Heatsink.																																
Heatsink Cooled	Temperature rise from the internal hottest spot, the core, to ambient air is $\Delta T = I^2(ESR)(\theta_{cc} + \theta_{ca})$, recommended max ΔT of 30 °C where θ_{cc} is the thermal resistance from core to case and θ_{ca} from case to ambient. To calculate maximum ripple capability with the NHR attached to a heatsink use the maximum core temperature and the values for θ_{cc} .																																
Example	As an illustration, suppose you operate an insulated NHR961M075JB0C in 135 °C air and attach it to a commercial heatsink with a free-air thermal resistance of 2.7 °C/W. Use a good thermal grease between the NHR and the heatsink, and the total thermal resistance is 2.7 + 3. 4 or 6.1° C/W. The power which would heat the core to 150 °C is (150 - 135)/6. 1 or 2.46 W. For an ESR of 211 mΩ, 2.46 W equates to a ripple current of 3.42 A.																																


Part Numbering System

NHR	191	M	200	JB	0	C
Type	Capacitance	Tolerance	Rated Voltage	Case Code	Insulation	Mounting Style
NHR	191 = 190 μF 102 = 1000 μF	M=±20%	005 = 5 Vdc 7R5 = 7.5 Vdc 200 = 200 Vdc	JK, L=1.5 in. JA, L=2.0 in JH, L=2.5 in JB, L=3.0 in. * other sizes available	0 = bare can 1 = polyimide	C = two leads
Examples: NHR191M250JB0C						

Type NHR – Slimpack™, 3000 hr@150 °C, Aluminum Electrolytic

Outline Drawing

Note: The polyester tape wrap may add up to 0.020 inches to the thickness and width of the capacitor.



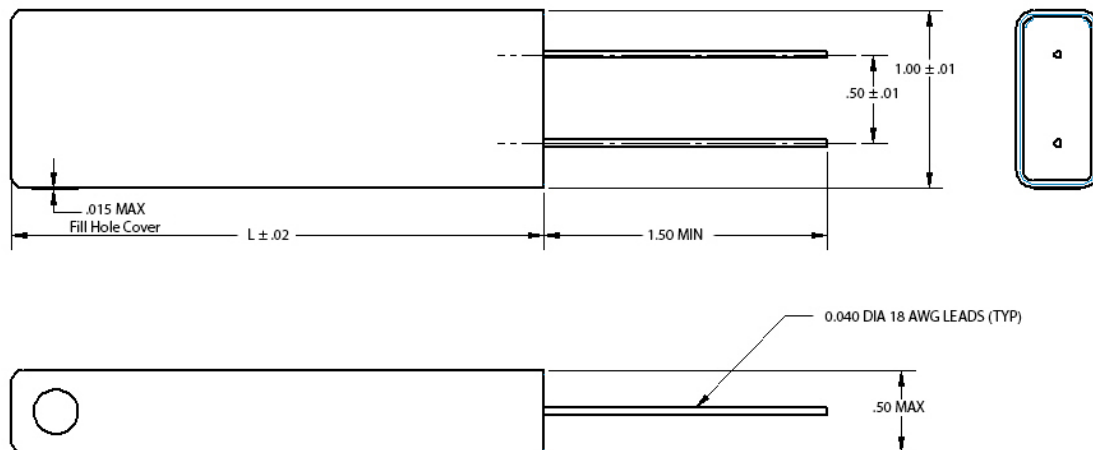


Ratings

Voltage Vdc	Cap µF	P/N	120Hz 25 °C Cat. ESR	20KHz 25 °C Cat. ESR	150 °C Ripple 120Hz	150 °C Ripple 20KHz	Case	Width (in)	Length (in)	Surge 25 °C Vdc
75	390	NHR391M075JK0C	0.538	0.206	0.75	1.58	1X1.5	1	1.5	110
75	550	NHR551M075JA0C	0.366	0.140	0.95	2.01	1X2	1	2.0	110
75	750	NHR751M075JH0C	0.268	0.103	1.15	2.44	1X2.5	1	2.5	110
75	960	NHR961M075JB0C	0.211	0.081	1.34	2.84	1X3	1	3.0	110
100	310	NHR311M100JK0C	1.048	0.402	0.54	1.13	1X1.5	1	1.5	150
100	430	NHR431M100JA0C	0.712	0.273	0.68	1.44	1X2	1	2.0	150
100	590	NHR591M100JH0C	0.521	0.200	0.83	1.75	1X2.5	1	2.5	150
100	750	NHR751M100JB0C	0.411	0.158	0.96	2.03	1X3	1	3.0	150
150	180	NHR181M150JK0C	1.088	0.417	0.53	1.11	1X1.5	1	1.5	220
150	260	NHR261M150JA0C	0.738	0.283	0.67	1.41	1X2	1	2.0	220
150	360	NHR361M150JH0C	0.541	0.207	0.81	1.71	1X2.5	1	2.5	220
150	450	NHR451M150JB0C	0.427	0.164	0.94	2.00	1X3	1	3.0	220
200	120	NHR121M200JK0C	1.107	0.424	0.52	1.10	1X1.5	1	1.5	300
200	170	NHR171M200JA0C	0.752	0.288	0.66	1.40	1X2	1	2.0	300
200	230	NHR231M200JH0C	0.551	0.211	0.80	1.70	1X2.5	1	2.5	300
200	290	NHR291M200JB0C	0.434	0.166	0.94	1.98	1X3	1	3.0	300
250	80	NHR800M250JK0C	1.500	0.575	0.45	0.95	1X1.5	1	1.5	350
250	110	NHR111M250JA0C	1.018	0.390	0.57	1.20	1X2	1	2.0	350
250	150	NHR151M250JH0C	0.746	0.286	0.69	1.46	1X2.5	1	2.5	350
250	190	NHR191M250JB0C	0.589	0.226	0.80	1.70	1X3	1	3.0	350
300	60	NHR600M300JK0C	2.547	1.273	0.37	0.64	1X1.5	1	1.5	400
300	90	NHR900M300JA0C	1.729	0.864	0.47	0.82	1X2	1	2.0	400
300	130	NHR131M300JH0C	1.267	0.633	0.57	0.99	1X2.5	1	2.5	400
300	160	NHR161M300JB0C	1.000	0.500	0.66	1.16	1X3	1	3.0	400




Type NHR – Slimpack™, 3000 hr@150 °C, Aluminum Electrolytic

Typical Performance Curves

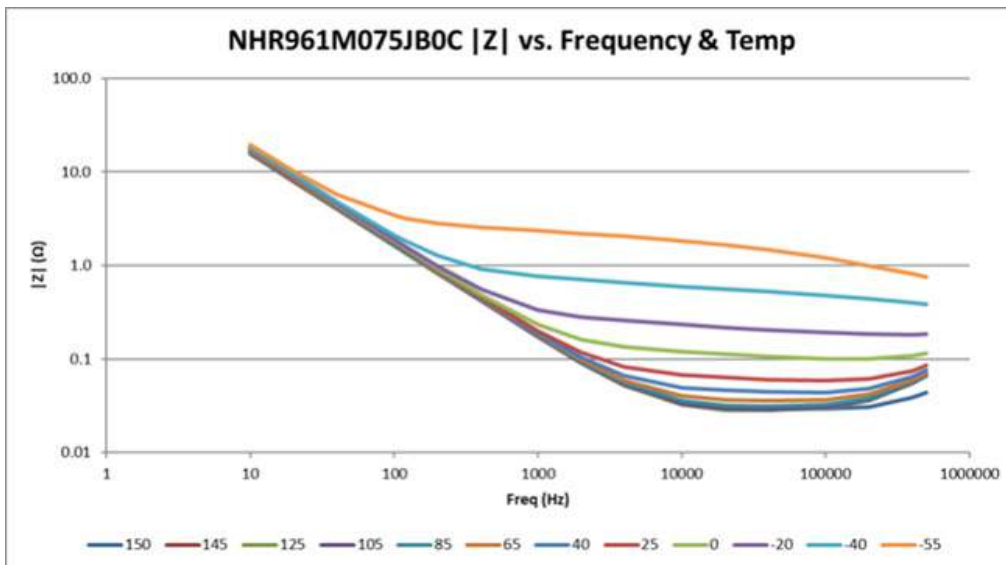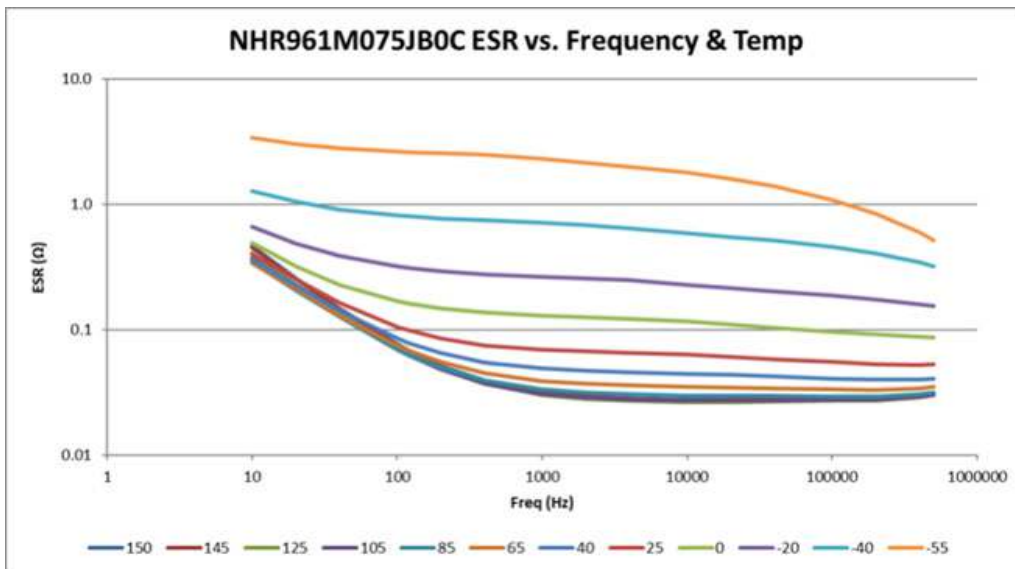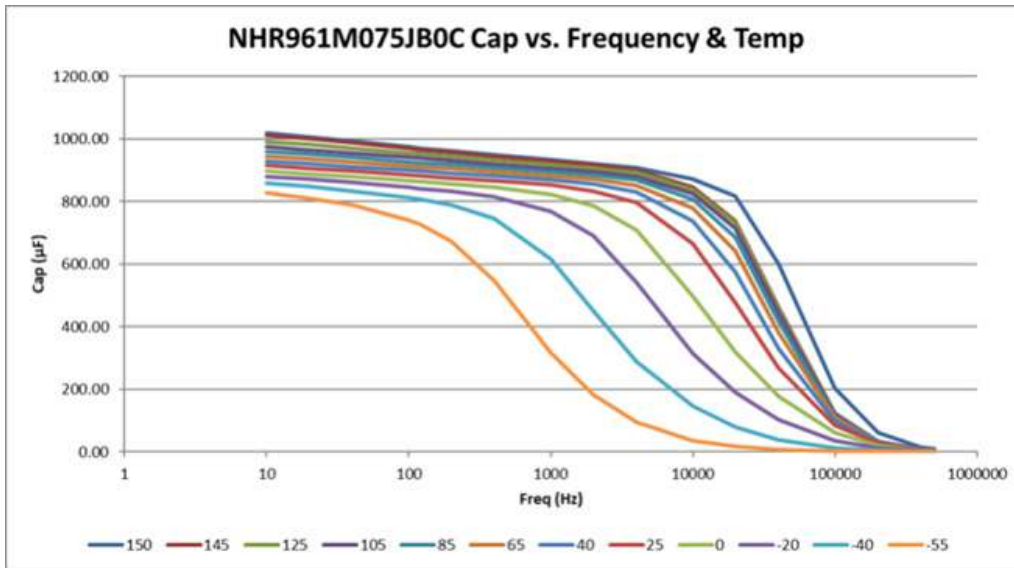

Type NHR – Slimpack™, 3000 hr@150 °C, Aluminum Electrolytic


Typical Performance Curves

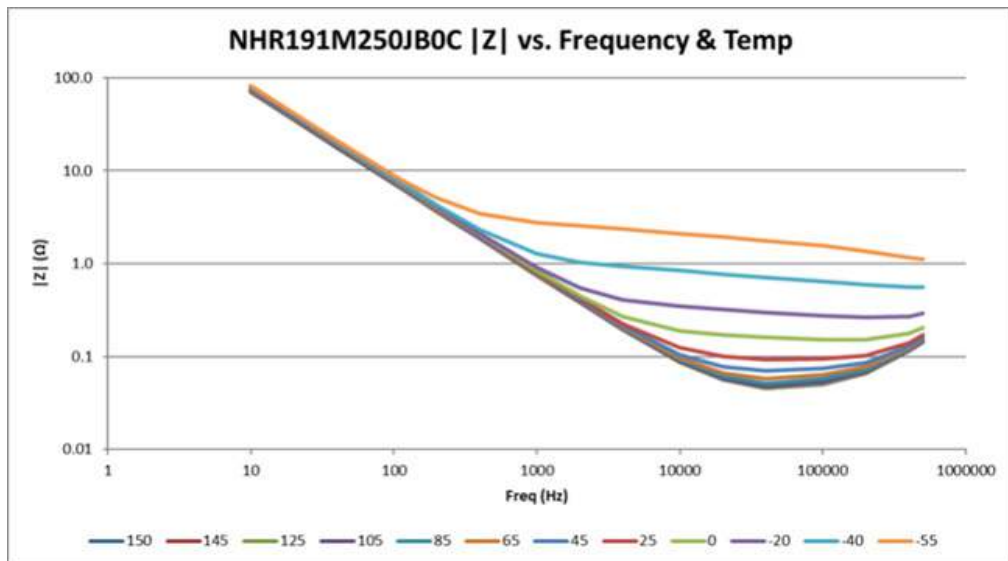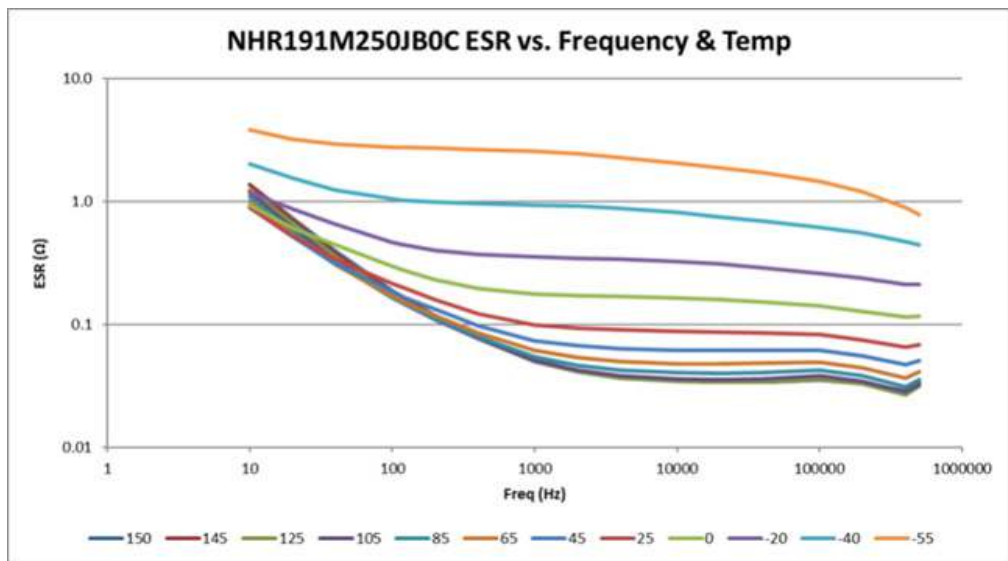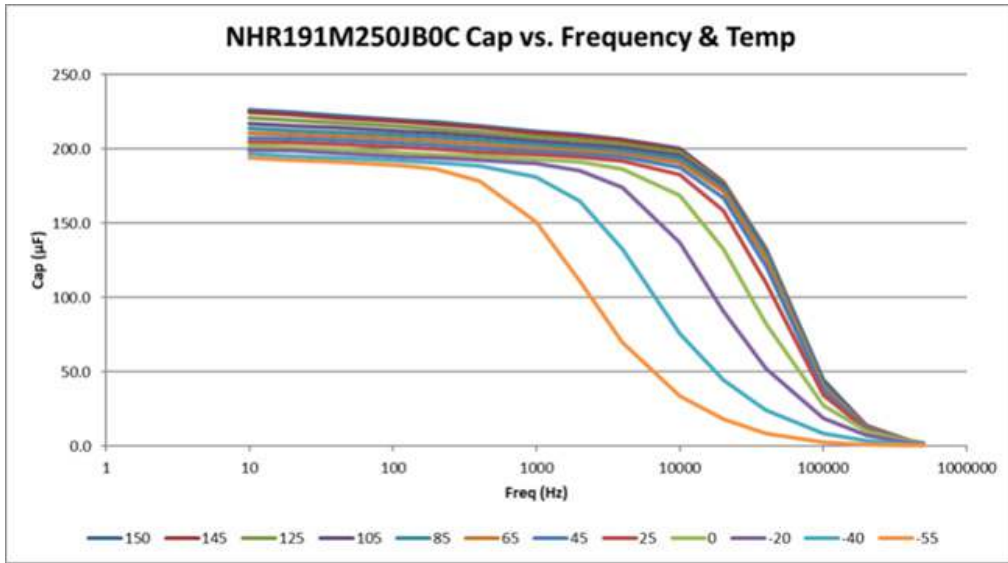


Type NHR – Slimpack™, 3000 hr@150 °C, Aluminum Electrolytic

Typical Performance Curves

Type NHR Operating Life in Kilohours vs Ripple Current

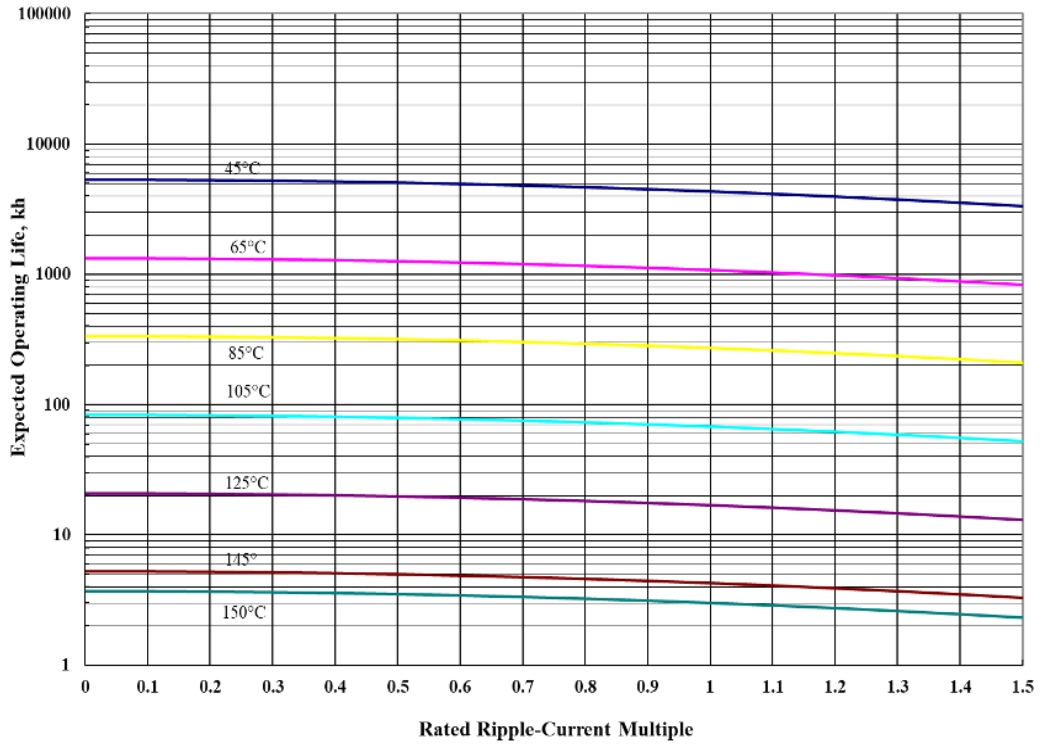

Type NHR Operating Life in Years vs Ripple Current

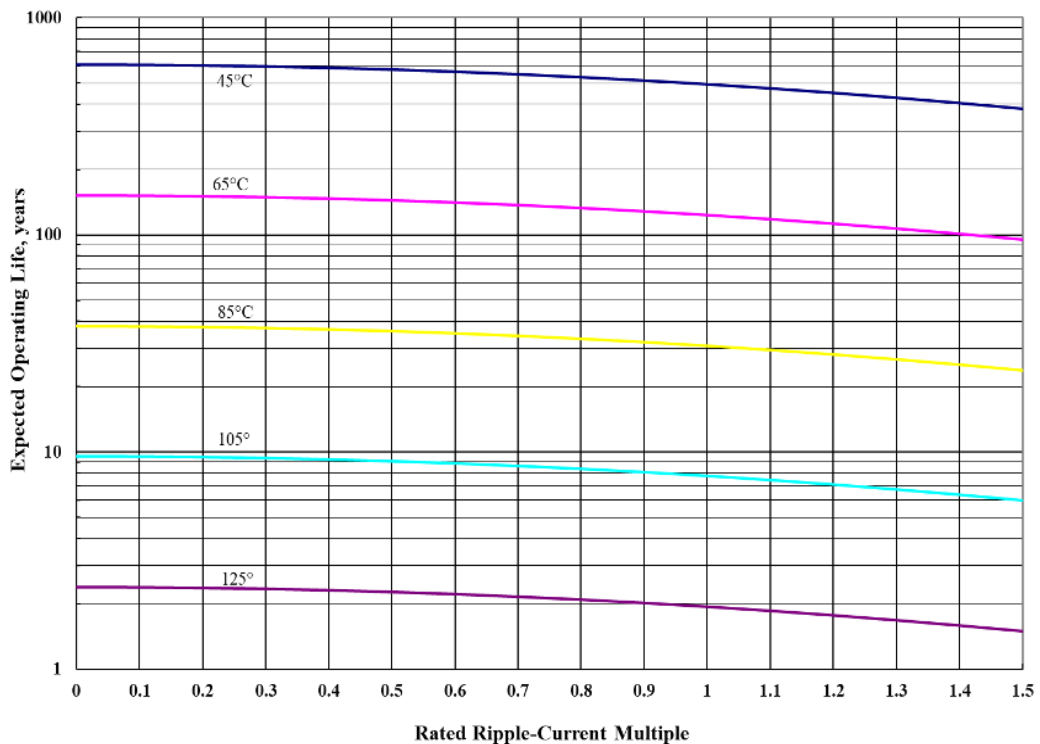

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.