


TOL = ±.010

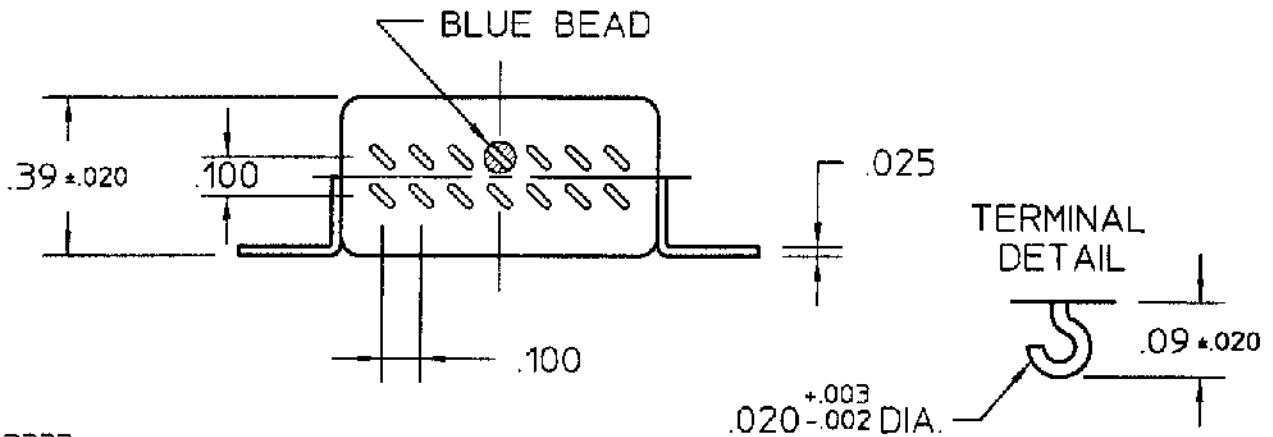


REV. 1  
DCO 63333

COIL: @ 25°C	
RESISTANCE	390 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.0 VDC
MUST RELEASE	10.1 VDC MAX, 1.84 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 2000 CPS @ 15 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES: OPERATE & RELEASE 7 MS MAX. (INCLUDING BOUNCE)	

CUSTOMER DATA SHEET

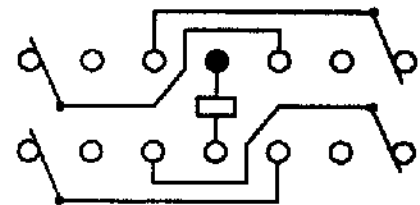

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO
2 AMP 28 VDC RESISTIVE
100,000 OPERATIONS

DR. R.B. 4/15/98 CK. 76 10-24-00

**CII Technologies**  
advanced control electronic solutions

CUST. QPL  
CUST. NO. M39016/40-002 REV.

"SR" RELAY

SR-7602