


RoHS COMPLIANT

REV	DATE
B	05/20/'21
C	06/18/'21

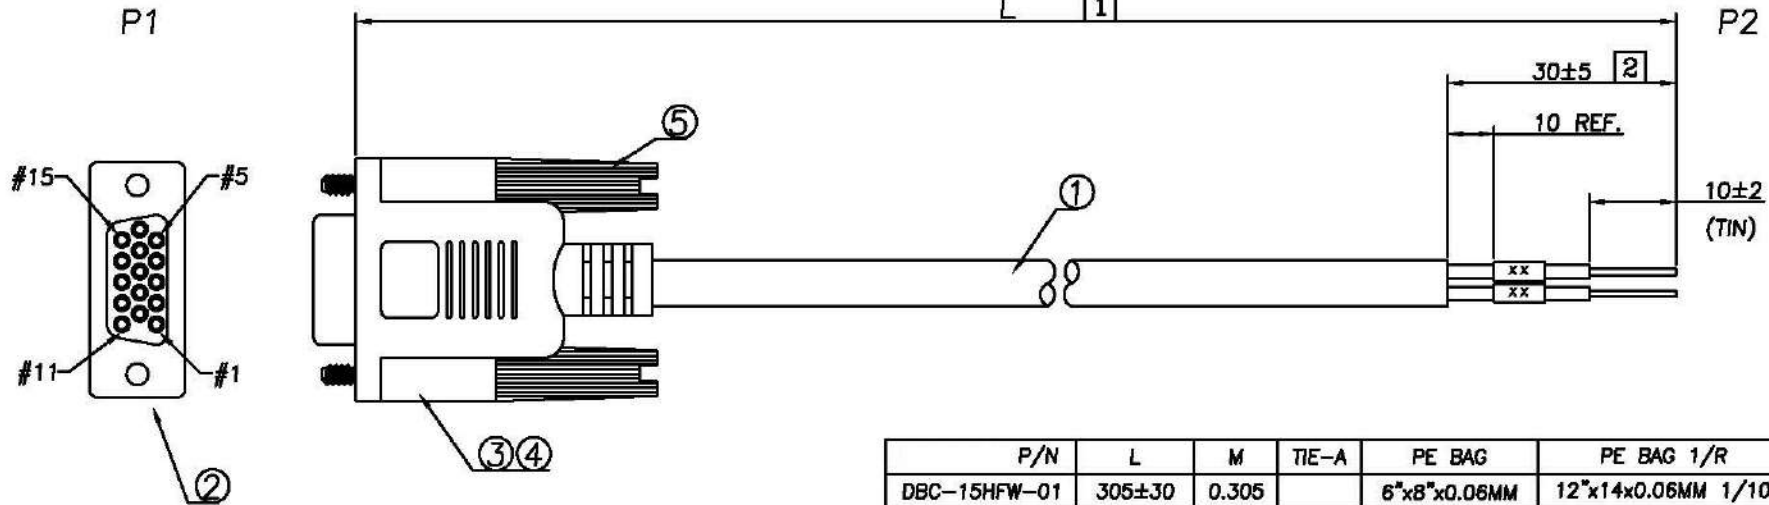


P/N	L	M	TIE-A	PE BAG	PE BAG 1/R	Q'TY
DBC-15HFW-01	305±30	0.305		6"x8"x0.06MM	12"x14"x0.06MM 1/10	A/R
DBC-15HFW-05	1525±50	1.525	100x2	6"x8"x0.06MM	14"x16"x0.06MM 1/10	A/R
DBC-15HFW-10	3050±50	3.05	120x2	7"x10"x0.06MM	14"x16"x0.06MM 1/10	A/R
DBC-15HFW-25	7625±50	7.625		8"x10"x0.06MM	16"x18"x0.06MM 1/5	A/R

PIN ASSIGNMENT

P1	P2	P1	P2		
1	BLACK	P1	11	PINK	P11
2	BROWN	P2	12	LIGHT GREEN	P12
3	RED	P3	13	BLACK/WHITE	P13
4	ORANGE	P4	14	BROWN/WHITE	P14
5	YELLOW	P5	15	RED/WHITE	P15
6	GREEN	P6	S	DRAIN CUT	
7	BLUE	P7			
8	PURPLE	P8			
9	GRAY	P9			
10	WHITE	P10			

*	LABEL: Prop 65 WARNING, 40*15MM	1	PCS
*	PE BAG: L"xW"x0.06MM	A/R	PCS
*	HT-TUBE OD:1.5MM, WHITE 15MM	15	PCS
*	TIE-A BLACK	XX*2	MM
*	CARTON: 46x30x25CM	A/R	PCS
*	PE BAG: 30"x28"x0.06MM	A/R	PCS
*	PE BAG: L"xW"x0.06MM	1	PCS
5	SCREW #4-40/BLACK	2	PCS
4	PVC BLACK (UL94-V0)	16	G
3	PVC-IN	4	G
2	D-SUB HD 15PIN FEMALE, BLACK	1	PCS
1	UL2464 28AWG 15C+AD BLACK OD:6.0	L	M
NO.	DESCRIPTION	QTY	UNIT



MODEL NAME:

HD15S SINGLE CONNECTOR MOLDING CABLE

MARK EXPLAIN:

- ⚠:Revision Change
- 1:Important Dimension
- Ⓜ:Note

TOLERANCE:

0.000:
0.00 : ±0.50
0.0 : ±0.50
0. : ±0.50
ANGLE: ±3.0'
UNIT: mm

COMPUABLEPLUS
PROVIDING CONNECTIVITY SOLUTIONS