

2




1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	WEIGHT	MATERIAL
FRFWC24X4W12	5.93 LB/EACH (2690g/EACH)	ABS
FRFWC24X4W12L	5.93 LB/EACH (2690g/EACH)	PC/ABS

NOTES:

- SEE CURRENT CATALOG FOR ADDITIONAL PART SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITY.
- THE FIBERRUNNER 24x4 FOUR-WAY CROSS WITH 12" EXITS IS DESIGNED WITH A MINIMUM 3" (76.2) BEND RADIUS TO PROTECT FIBER OPTIC CABLES.
- DIMENSIONS IN PARENTHESES ARE IN METRIC.

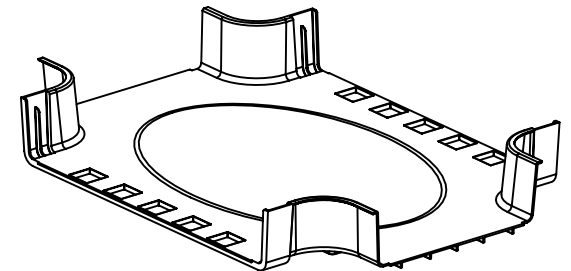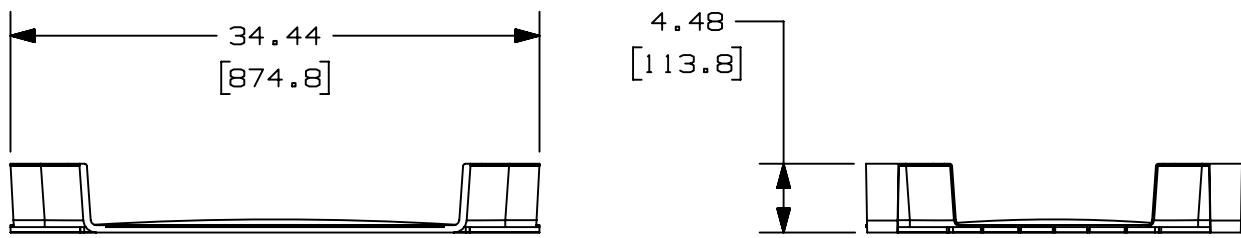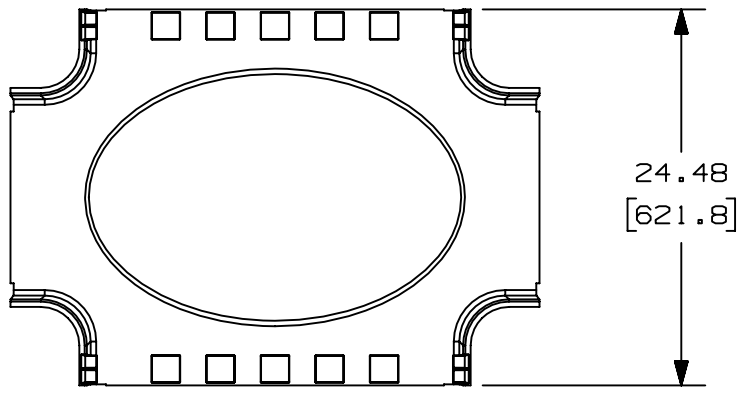

B

B

A

A

D10100DA/20

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00B	9/1/2020	MES	DWR	DWR	UPDATED TITLE BLOCK, ADDED NEW PART NUMBER	V09002DZ/11

TITLE FIBERRUNNER 24x4 FOUR-WAY CROSS WITH 12" EXITS (FRFWC24X4W12,FRFWC24X4W12L)		CUSTOMER DRAWING	
ITEM REVISION NAME D39701BW/00		PANDUIT	
DATASET FILE NAME D39701BW_DC/00B FRFWC24X4W12			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: (.X) ± .03 (.8) (.XXX) ± .005 (0.125) (.XX) ± .03 (.8) ANGLES ± .5°		MATERIAL: SEE PART NUMBER TABLE ABOVE	
THIRD ANGLE PROJECTION		DRAWING NUMBER: 39701-19	
DRAWN BY MSO	DATE 10-21-08	CHK SL	SCALE NONE
SHT 1 OF 1		SIZE A	

2

1