

Printed-circuit board connector - PTSM 0,5/10-HH-2,5-SMD R44 - 1701570

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 10, Pitch: 2.5 mm, Color: black, Contact surface: Tin, Assembly: SMD/THT/THR



Product Features

- Compatible with PTSM.../PTPM... plugs
- 2.5 mm pitch
- High current carrying capacity of 6 A
- Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting
- Rugged solder anchor for secure, mechanical fixing to the surface
- Specifically designed for use in reflow and SMT processes



Key commercial data

Packing unit	1 pc
Minimum order quantity	600 pc
Weight per Piece (excluding packing)	600.0 GRM
Custom tariff number	85369010
Country of origin	Germany

Technical data

Dimensions

Length	7.5 mm
Pitch	2.5 mm
Dimension a	22.5 mm
Pin spacing	2.50 mm

General

Range of articles	PTSM 0,5/..-HH-SMD
Insulating material group	IIIa

Printed-circuit board connector - PTSM 0,5/10-HH-2,5-SMD R44 - 1701570

Technical data

General

Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	50 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I _N	6 A
Maximum load current	6 A
Insulating material	LCP
Inflammability class according to UL 94	V0
Color	black
Number of positions	10

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27260704
eCl@ss 7.0	27440402
eCl@ss 8.0	27440402

ETIM

ETIM 3.0	EC001121
ETIM 4.0	EC002637
ETIM 5.0	EC002637

UNSPSC

UNSPSC 6.01	30211810
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Printed-circuit board connector - PTSM 0,5/10-HH-2,5-SMD R44 - 1701570

Approvals

Approvals


Approvals

GOST / GOST / UL Recognized / UL Recognized / cUL Recognized / cULus Recognized


Ex Approvals

Approvals submitted


Approval details

GOST 

GOST 

UL Recognized 

	B
Nominal current IN	6 A
Nominal voltage UN	150 V

UL Recognized 

	B
Nominal current IN	5 A
Nominal voltage UN	150 V

Printed-circuit board connector - PTSM 0,5/10-HH-2,5-SMD R44 - 1701570


Approvals

cUL Recognized	
Nominal current I _N	6 A
Nominal voltage U _N	150 V


cULus Recognized	
------------------	--

Drawings

Drilling diagram

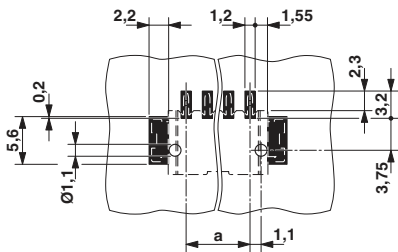

Dimensioned drawing

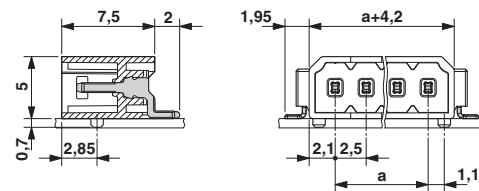

Dimensioned drawing

