

## 1800/1900 Series Delay On Operate Digital Timing Modules

### Product Facts

- DC input delay on operate timer offered in fixed (1800) and adjustable (1900) types
- 300mA output
- CMOS digital design
- Reverse polarity protection
- Hermetic package
- Built to MIL-R-83726 environmentals
- Customizing options include
  - Tighter timing tolerances
  - Header and mounting

### Electrical Specifications

**Timing Range** —  
**1800 series (fixed)** — 50 ms to 600 s  
**1900 series (adjustable)** — 50 ms to 240 s

**Tolerance** — ±10% or 10 ms, whichever is greater

**Repeatability** — ±0.1%

**Recovery Time** — 10 ms

**Recycle Time** — 20 ms

**Input Data** —

**Input Voltage** — 18 to 31Vdc

**Current Drain (at 25°C, 28Vdc)** — 10mA, plus load current

**Output Data** —

**Output Form** — 1 Form A (SPST-NO) solid state switch closure to ground

**Output Rating** — 300mA @ 25°C, 100mA @ 125°C

**Minimum Load** — 10mA

**Saturation Voltage** — 2.5Vdc, max.

**Leakage** — 1µA @ 25°C, 10µA @ 125°C

### Environmental Specifications

**Temperature Range** — -55°C to +85°C or -55°C to +125°C

**Vibration** — 20 G's, 10 - 2,000 Hz

**Shock** — 50 G's, 11 ± 1ms duration

**Insulation Resistance** — 1,000 megohms, min., at 500Vdc, all terminals to case


**Dielectric Strength** — 500Vrms, 60 Hz., at sea level, all terminals to case

**Sealing** — Hermetic, 1.3 in. (33.0mm) of mercury

**Life** — 100,000 operations, min.

**Weight** — 1 oz (28.3g) max

### Timing Diagram

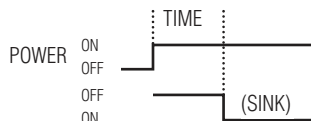

Kilovac 1800/1900 series delay on operate timer modules combine solid state timing circuits with solid state switch outputs in robust hermetically sealed enclosures. The 1800 types are fixed timers, while the 1900 models are adjustable via an external resistor. The 1 Form A (SPST-NO) switch is rated 300mA.

### Adjustable Timing Formula (1900 types)

The resistance required to obtain timing within this range is determined by using the formula:

$$R_x = 400K (T/T_{max}) - 40K$$

$R_x$  = External Resistance in Ohms,  
 $T$  - Desired Time in Seconds, and  
 $T_{max}$  = Maximum Time (Code).

A high quality deposited carbon ±1%, 0.1W (min.) resistor is recommended for external resistance.



### Part Numbering System

<b>Typical Part Number</b>	1811	-1	A	-1002
<b>Model Number:</b>	1811 = Fixed timer, -55°C to +85°C 1821 = Fixed timer, -55°C to +125°C 1911 = Adjustable timer, -55°C to +85°C 1921 = Adjustable timer, -55°C to +125°C			
<b>Header Style (see Header Options drawings):</b>	1 = Hook terminals    2 = Straight terminals			
<b>Mounting (see outline dimension drawings):</b>	A = Plain case    B = Bracket B    C = Studs on side    E = Bracket E			

### Timing Code:


Four-digit code for any value between 50ms and 600s for fixed (1800) timers, and 50ms and 240s for adjustable (1900) timers.

The timing code consists of four digits and gives the time in ms. The first three digits are the significant figures and the last digit is the number of zeros following the significant figures; thus 50 ms would be coded 0500, 1.1 s would read 1101, and 1 m (60 s) would be 6002.

Adjustable timers cover one decade, e.g., 62 ms to 620 ms. The upper decade limit is  $T_{max}$  in the timing formula and is the value defined by the timing code in the part number.

A typical part number would be 1811-1A-1002. This fixed timing module operates at -55°C to +85°C, has hook terminals, style "A" mounting, and a time delay of 10s.

### Outline Dimensions

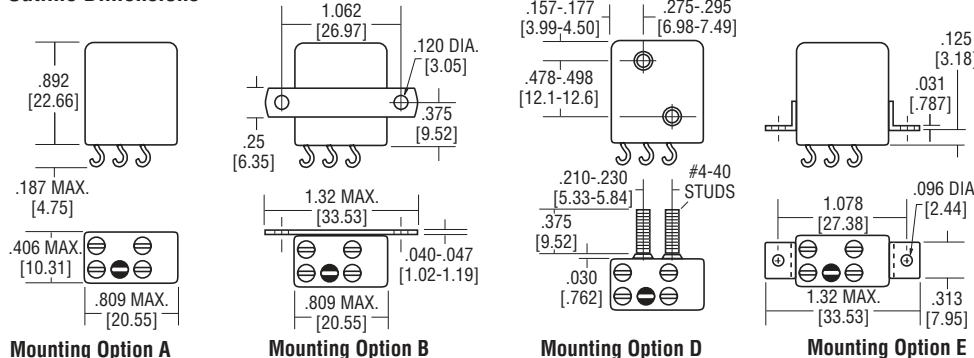


### Mounting Option A

### Mounting Option B


### Mounting Option D

### Mounting Option E

### Wiring Diagrams




### 1800 Series (Fixed)



### 1900 Series (Adjustable)

**Note:** The blank pin on 1800 series types is active and must not be connected.

### Header Options

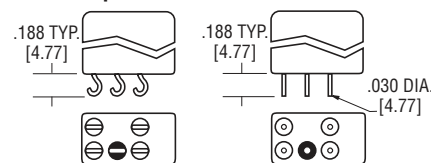

TERMINAL SPACING IS 0.2 IN [5.08]

### Header Option 1

### Header Option 2