	Ciob i cit, iiic.	Drawing Title: USB-C (USB TYPE-C) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Receptacle Connector 6 Position Waterproof IPX7 Surface Mount, Right Angle; Through Hole, 450-01290404(R)	
	· ·	Model No. Connector	
	Northvale, NJ 07647		
ľ	Tel. (201) 784-1000	Part No./Ordering No. JACK-USBC-163SMT-4BLS1735	Rev A
	Fax (201) 784-0111		

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at http://www.globtek.com/iso-certificates/

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (http://en.globtek.com/terms-and-conditions/).

Prop 65 Statement: https://en.globtek.com/prop-65-statement.pdf

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek product are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:	Customer P/N:
Quote Number:	Date:
Authorized Representative Name:	Authorized Representative Signature:

GlobTek, Inc. www.globtek.com	Drawing Title: USB-C (USB TYPE-C) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Receptacle Connector 6 Position Waterproof IPX7 Surface Mount, Right Angle; Through Hole, 450-01290404(R)		
186 Veterans Drive,	Model No. Connector		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. JACK-USBC-163SMT-4BLS1735	Rev A	
Fax (201) 784-0111			

REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
Α	Initial release	QA	08/03/2022	QA

3D CAD FILE:

https://www.globtek.com/file/dl/jack-usbc-163smt-4bls1735_asm.stp

AGENCY ONLINE DOCUMENTS

RoHS/RoHS3 Declaration	https://www.globtek.com/pdf/rohs_cert/01t3a000005hbrmAAA	
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf	
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf	
Prop 65 Statement	https://en.globtek.com/prop-65-statement.pdf	

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.


GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111

Drawing Title: USB-C (USB TYPE-C) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Receptacle Connector 6 Position Waterproof IPX7 Surface Mount, Right Angle; Through Hole, 450-01290404(R)

Model No. Connector

Part No./Ordering No. <u>JACK-USBC-163SMT-4BLS1735</u>

Rev A

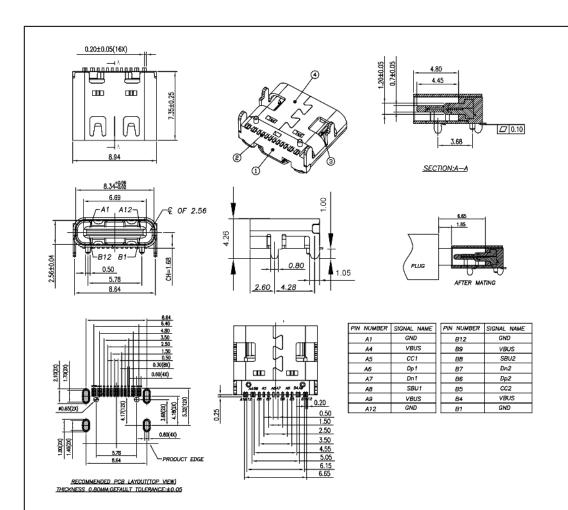

- 1. MATERIAL SPECIFICATION:
- 1. HOUSING: HIGH TEMPERATURE RESISTANT PLASTIC(LCP), UL94 V-0.
- 2. CONTACTS: COPPER ALLOY
- 3. MID PLATE: STAINLESS STEEL
- 4. 4. FRONT SFELL: STAINLESS STEEL

2.PLATING SPECIFICATION: 2-1. CONTACT:

Ni 50U" MIN. UNDER PLATED OVER ALL.

GlobTek, Inc. www.globtek.com	Drawing Title: USB-C (USB TYPE-C) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Receptacle Connector 6 Position Waterproof IPX7 Surface Mount, Right Angle; Through Hole, 450-01290404(R)	
186 Veterans Drive,	Model No. Connector	
Northvale, NJ 07647		
Tel. (201) 784-1000	Part No./Ordering No. JACK-USBC-163SMT-4BLS1735	Rev A
Fax (201) 784-0111		

Au 3u" PLATED ON THE FUNCTION AREA OF CONTACT.

(GOLD PLATING THICKNESS FOLLOW THE P/N)

PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N)

2-2. FRONT SHELL:

Ni 30U" MIN. UNDER PLATED OVER ALL.

2-3. SHIELD PLATE&EMI PLATE:

CLEAR ONL

- 3. MECHANICAL PERFORMANCE, 3-1. INSERTION FORCE: 0.5~2.0KGF.
- 3-2. REMOVAL FORCE: 0.8KGF~2.0KGF.
- 3-3. DURABILITY: 10000 CYCLES.
- 4. ELECTRICAL PERFORMANCE
 - 4-1. CURRERNT RATING: 5.0A

VOLTAGE RATINF: 5.0V

4-2. LLCR:

VBUS & GND PINS AND OTHER PINS: $40m\Omega$ /PIN MAX.

SHIELD: $50 m\Omega$ / MAX.

LLCR MAX. CHACE OF ALL PINS: $10M\omega$.

- 4-3. INSULATION RESISTANCE: $100m\Omega$ min.
 - 4-4. DIELECTRIC WITHSTAND VOLTAGE, AC 100V FOR 1 minute.
- 5. ENVIRONMENTAL PERFORMANCE:

OPERATING TEMPERATURE: -25°C ~ +85°C

6. AIR REFLOW:

THE PEAK TEMPERATURE ON THE BOARD SHALL

BE MAINTAINED FOR 10 SECONDS AT 260°C

Temperature Life, Vibration, Cyclic Temperature and Humidity, Thermal Shock, Mixed Flowing Gas and etc.:

https://www.globtek.com/pdf/ENVIRONMENTAL.pdf

Packing:


GlobTek, Inc.
www.globtek.com
186 Veterans Drive,
Northvale, NJ 07647
Tel. (201) 784-1000
Fax (201) 784-0111

Drawing Title: USB-C (USB TYPE-C) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Receptacle Connector 6 Position Waterproof IPX7 Surface Mount,
Right Angle; Through Hole, 450-01290404(R)

Model No. Connector

Model No. JACK-USBC-163SMT-4BLS1735

Rev A

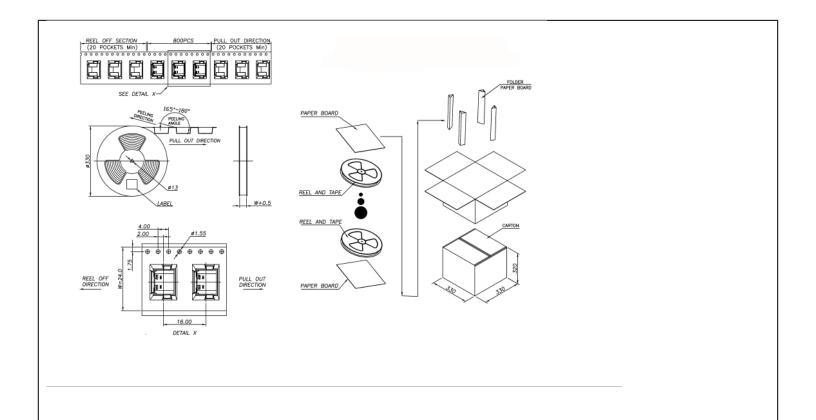

GlobTek, Inc. www.globtek.com	Drawing Title: USB-C (USB TYPE-C) USB 3.2 Gen 2 (USB 3.1 Gen 2, Superspeed + (USB 3.1)) Receptacle Connector 6 Position Waterproof IPX7 Surface Mount Right Angle; Through Hole, 450-01290404(R)		
186 Veterans Drive,	Model No. Connector		
Northvale, NJ 07647			
Tel. (201) 784-1000	Part No./Ordering No. JACK-USBC-163SMT-4BLS1735	Rev A	
Fax (201) 784-0111			

PACKAGING			
Packing Spec P/N:			
Box Qty:	5000		
Gift Box Size (mm):			
Gift Box Color:	White		
Master Carton Size (mm):	330 x 330 x 320		
Master Carton Cubic Volume (m	n³): 0.03		
Master GW (Kg):	8.0 kg		
wt Ea. (Kg):	0.00 kg		
wt Ea. (Kg):	0.00 kg		
LABEL SPECS:,			
PACK SPEC:			