


PRODUCT CODE: AYL4845

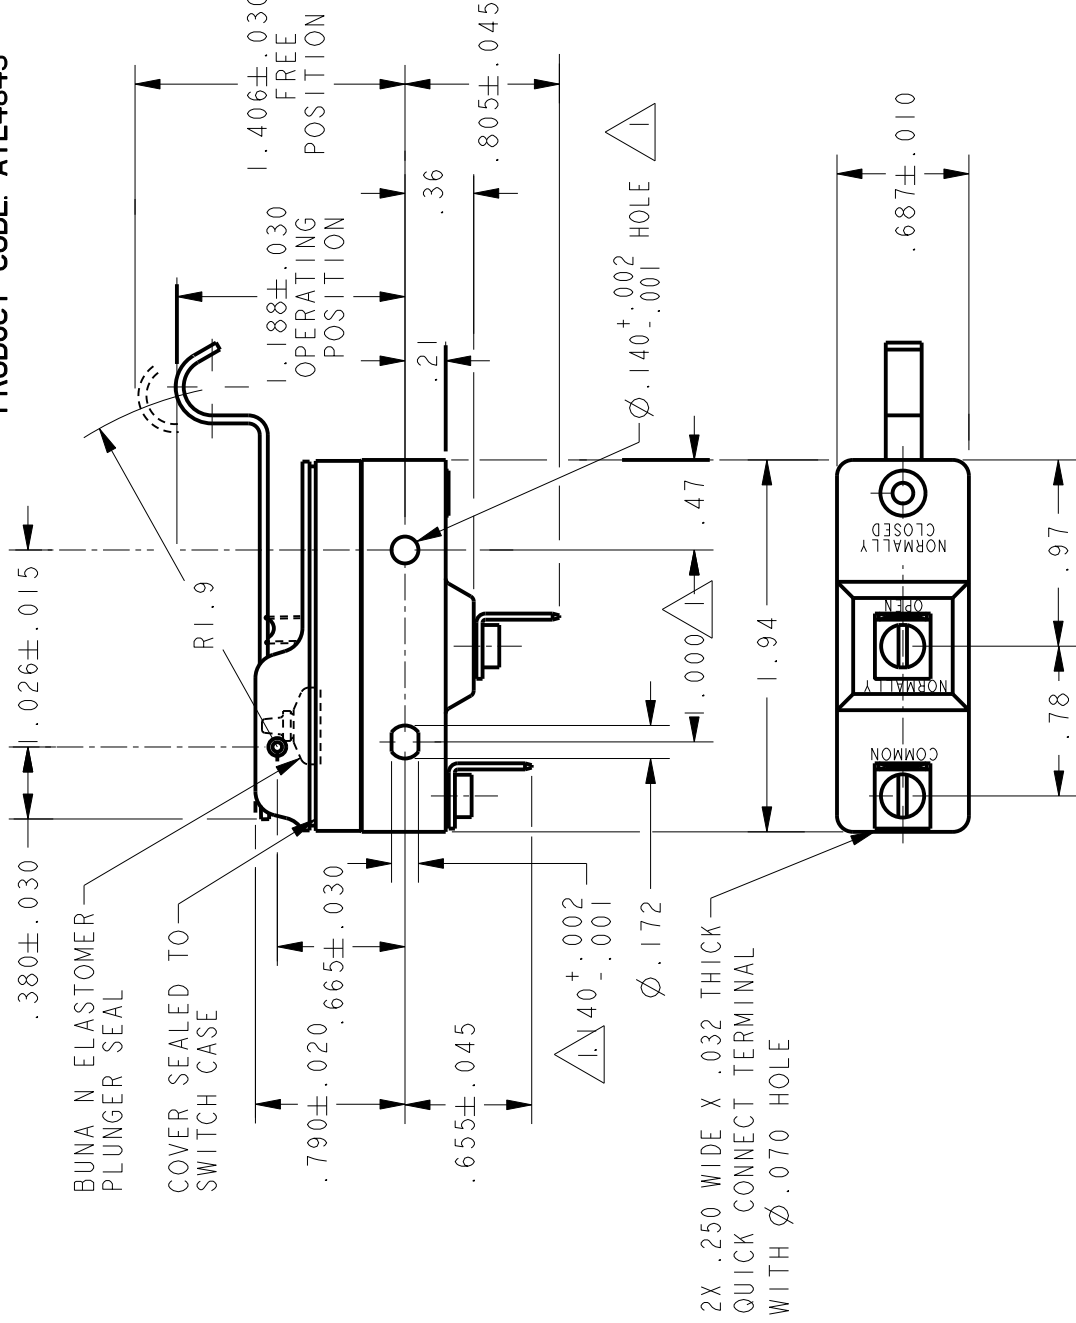

**NOTES**

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF  $\phi .139$  MAX ON  $1.000 \pm .002$  CENTERS
- SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
- CONTACT MATERIAL - GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



SCALE	FULL	DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
ONE PLACE	(.0)	$\pm .030$
TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$
ANGLES		$\pm$
WEIGHT	.076 LB	

**ELECTRICAL DATA**

CONTACT ARRANGEMENT

S P N 0

L22 1A 125 VAC



T85 25E3

**CHARACTERISTICS**

OPERATING FORCE	----- 3 1/2 OZ MAX
RELEASE FORCE	----- 3/4 OZ MIN
DIFFERENTIAL TRAVEL	----- .004-.040
OVERTRAVEL	----- .156 MIN

YZ-2RW80725551-D6

CATALOG LISTING

1	4
---	---

PAGE 1 OF 1

REVISIONS

A	200763	
TSM	14JUL00	23NOV05
B	0016786	
SPK	23NOV05	

CHECK	RJ
CHECK	14JUL00

CHECK	SAV
-------	-----

CHECK	14JUL00
-------	---------

TSM	14JUL00
DRAWN	PTC/CAD 2D

X100891-YZ

REPLACES

RELEASE NO. PR-22459