
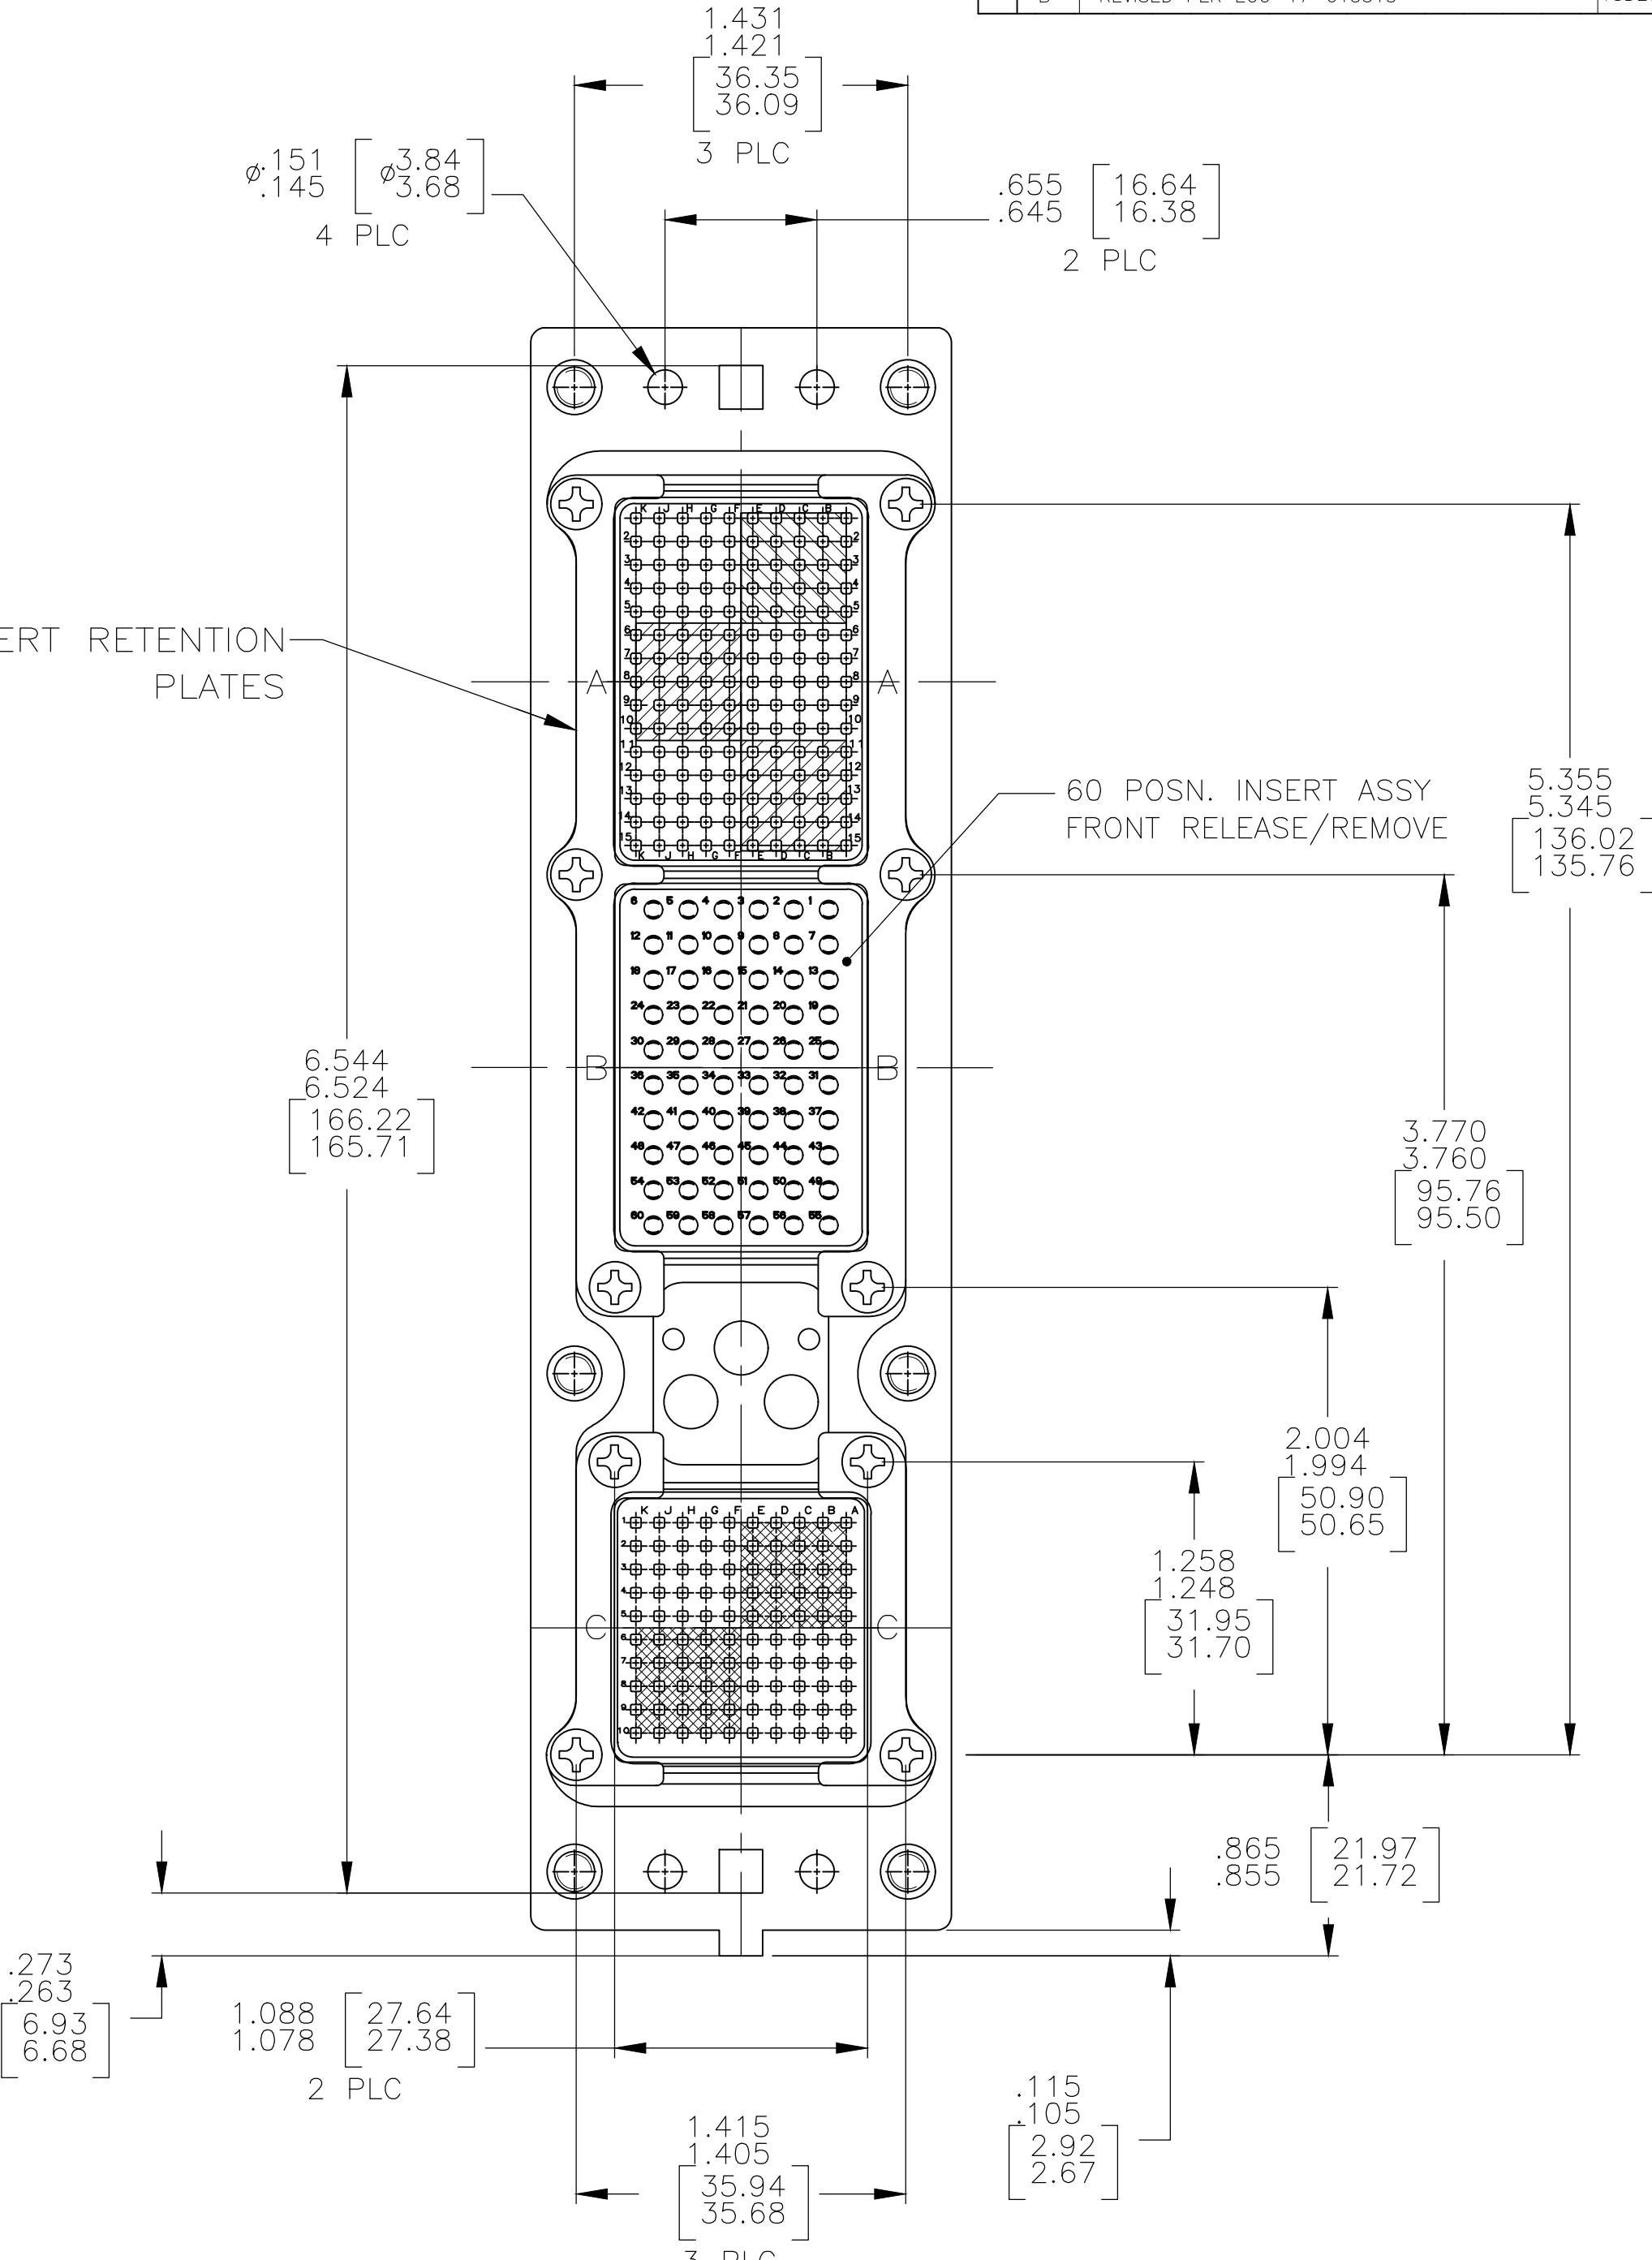
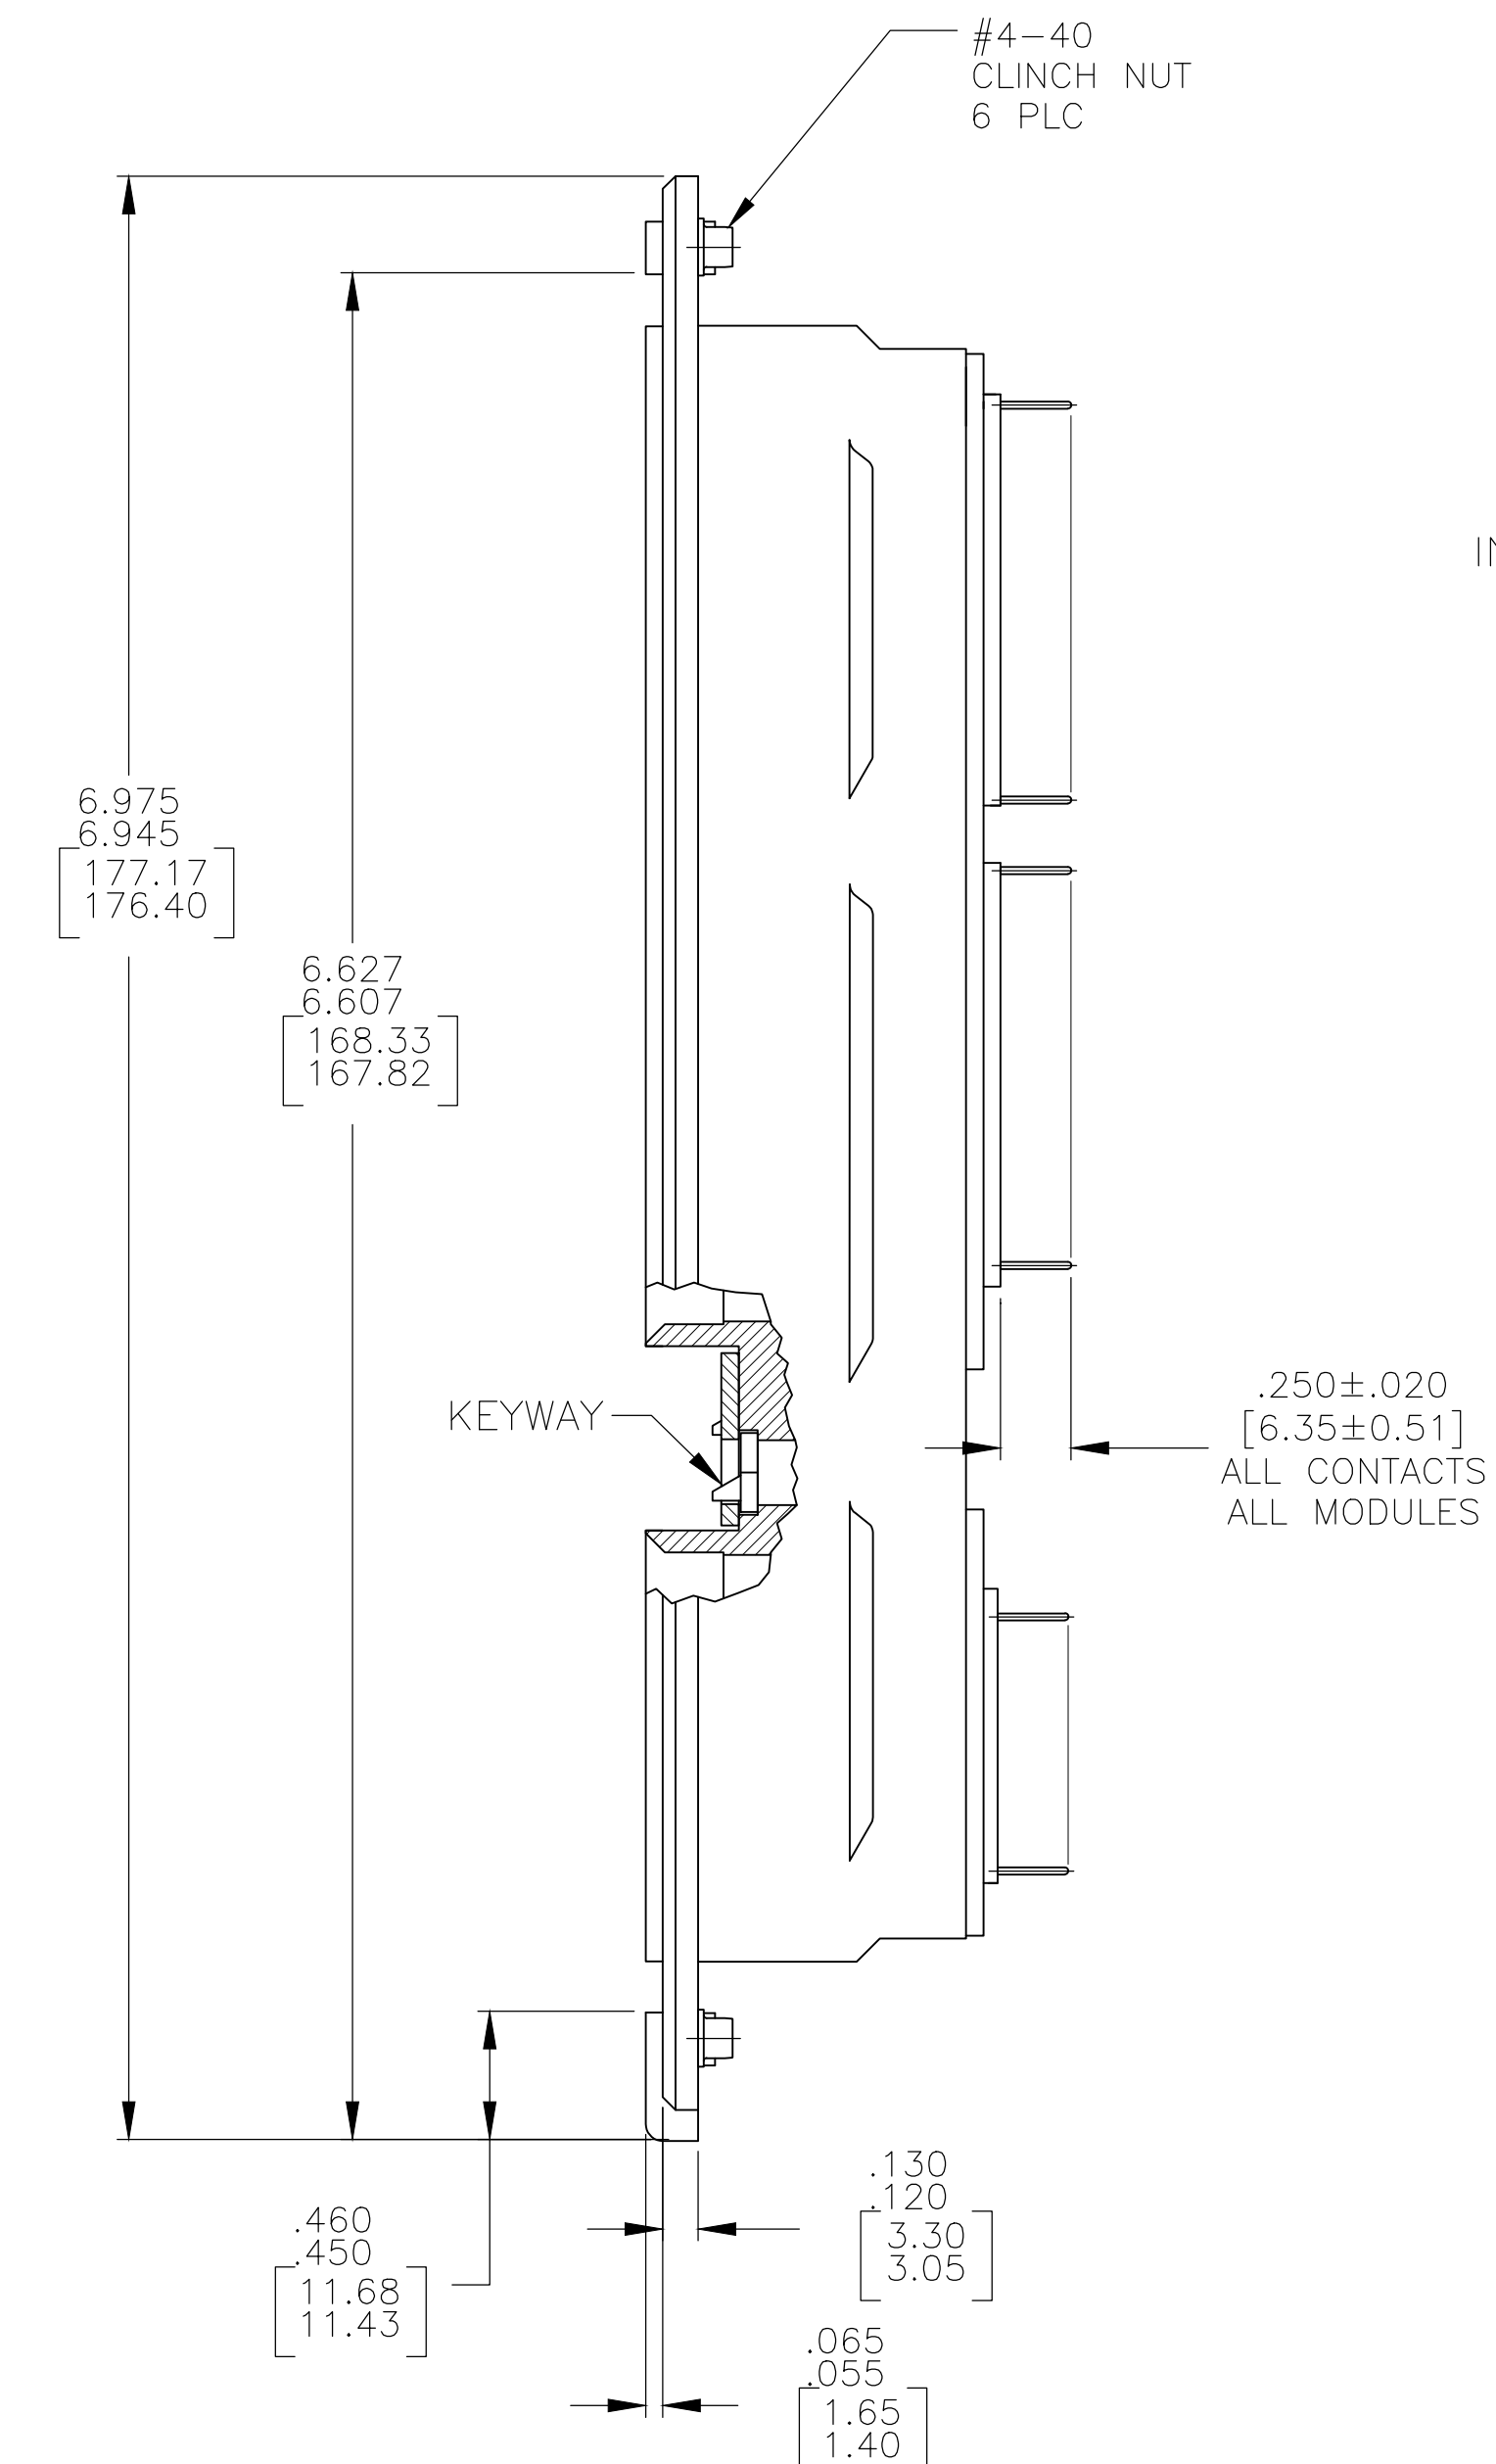


D

C

B

A

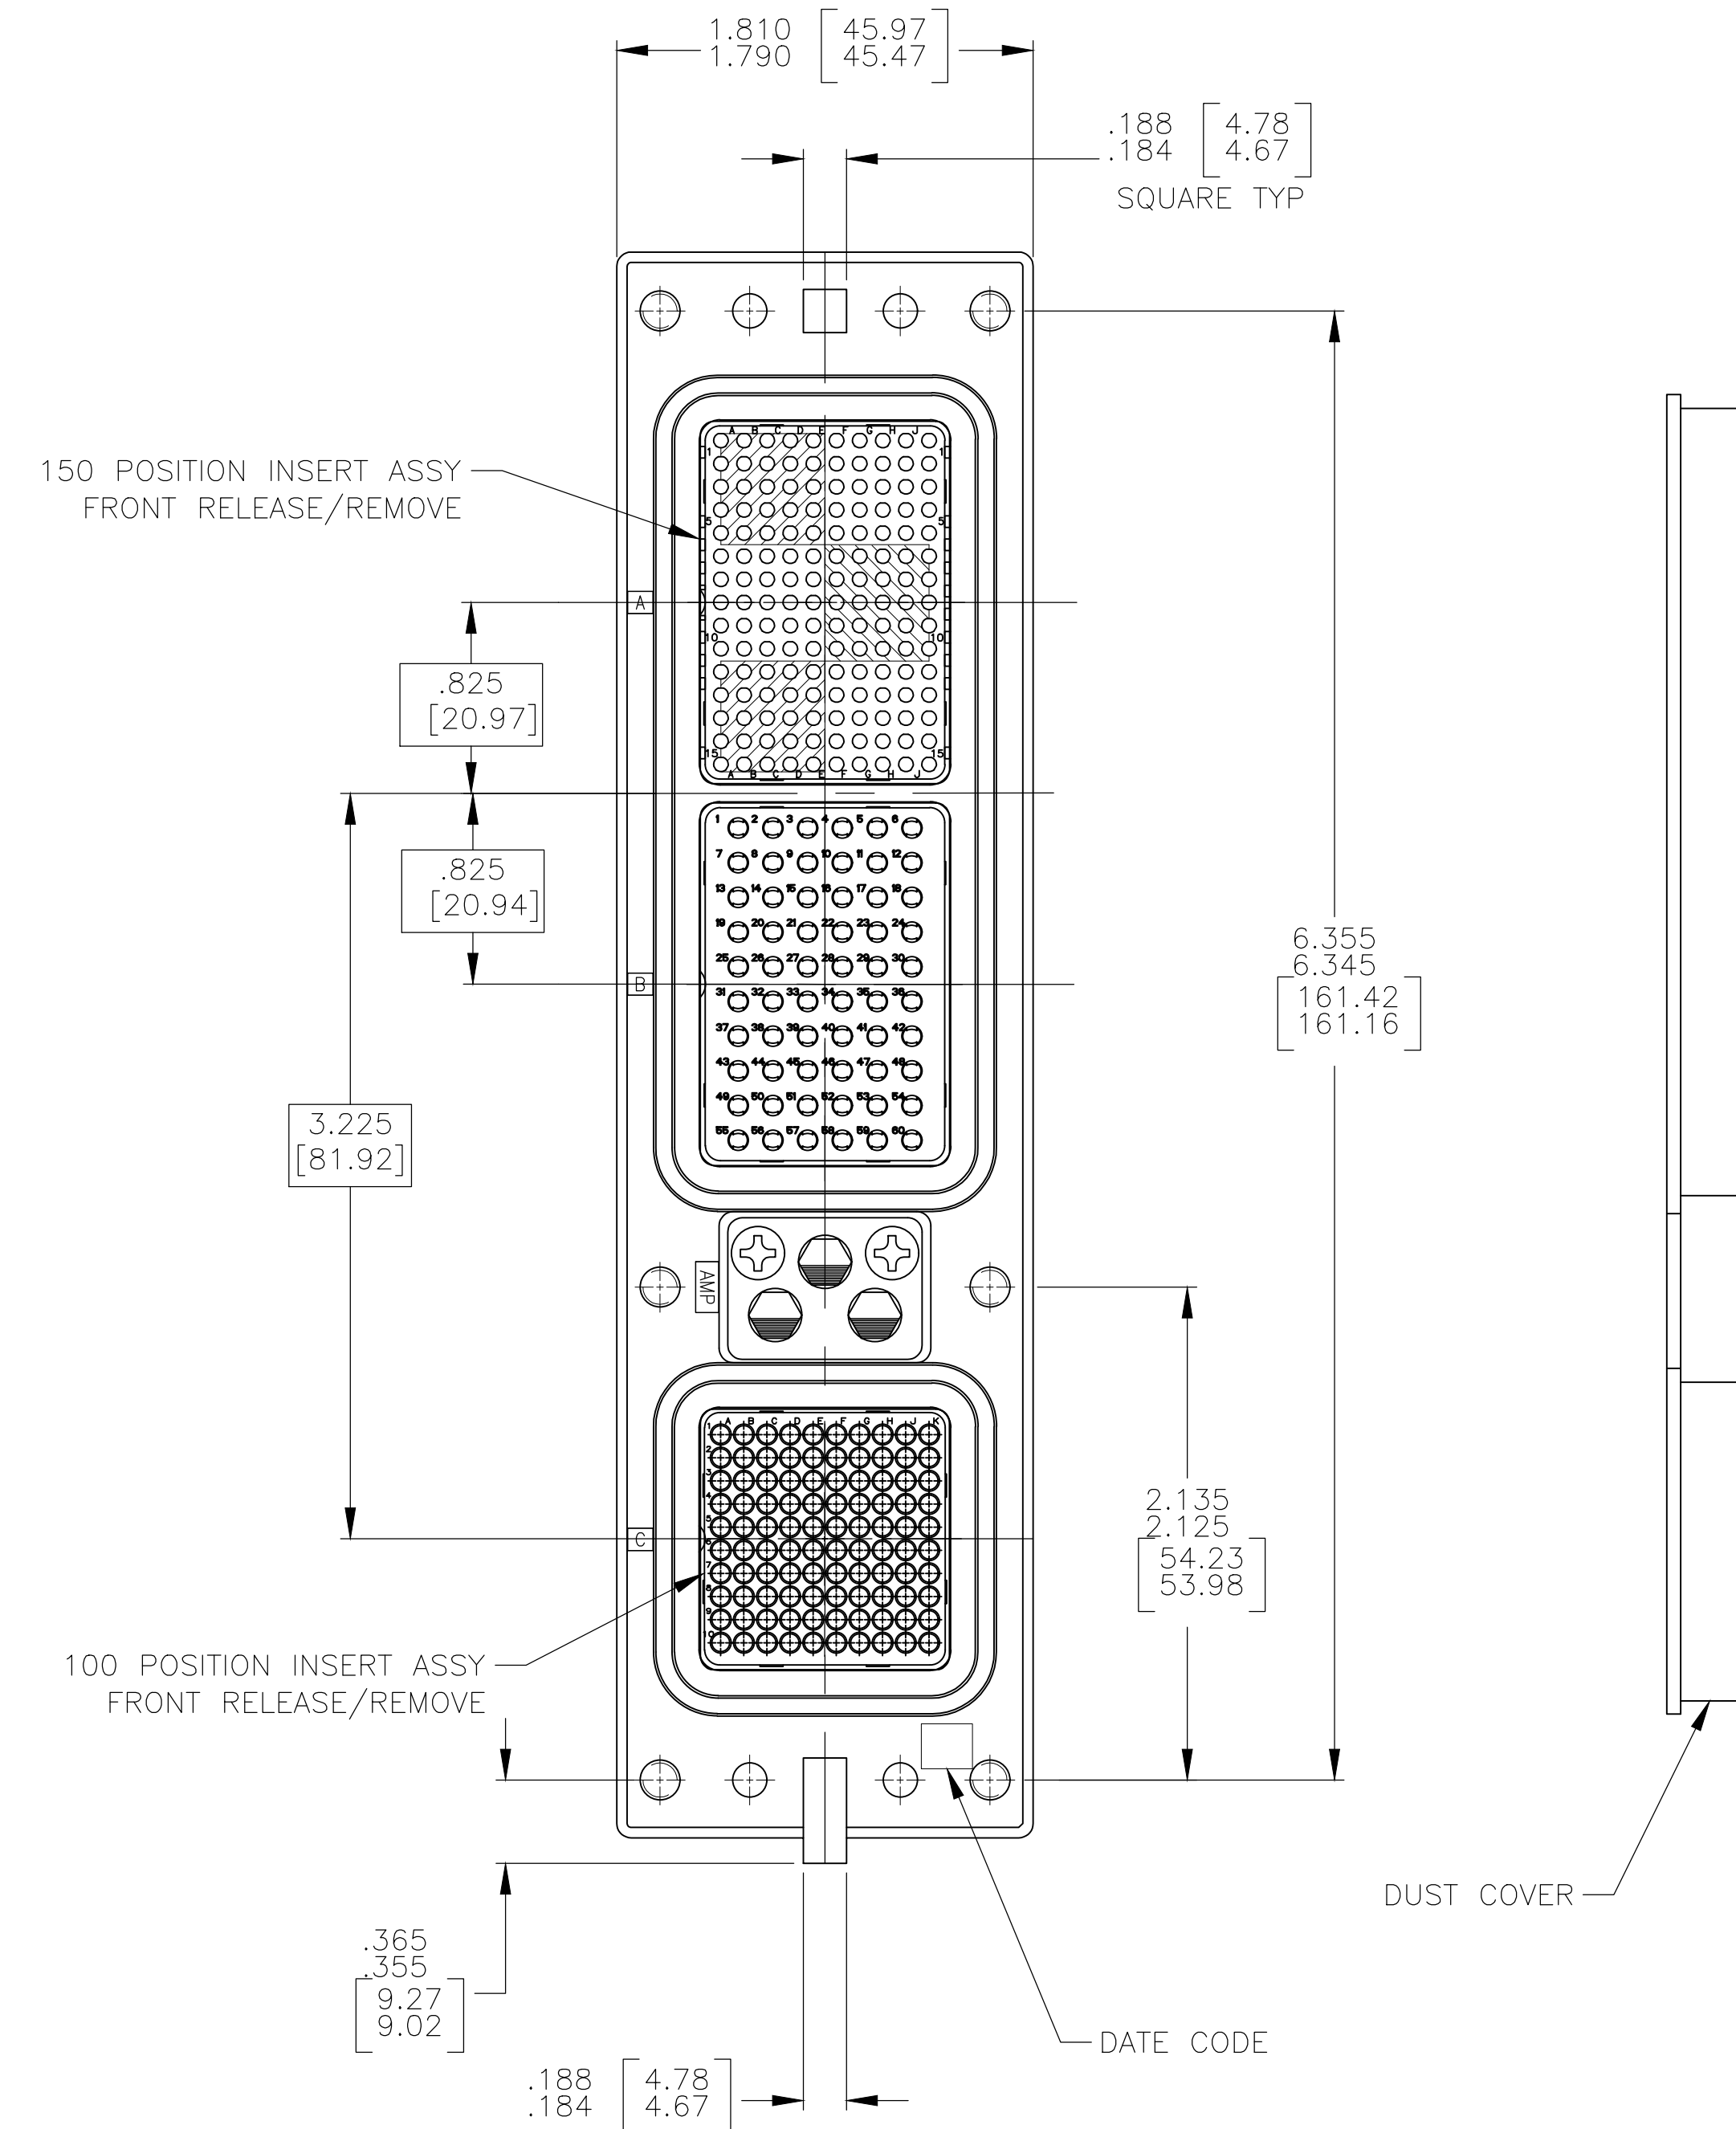

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- DUST COVER INSTALLED FOR SHIPPING.
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
- CONTACTS NOT SHOWN IN FRONT AND REAR VIEWS FOR CLARITY.

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	ELECTROLESS NICKEL PER MIL-C-26074
INSERT RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074
SCREWS	STEEL OR STAINLESS STEEL	PASSIVATED
POLARIZING KEYS	ZINC ALLOY PER ASTM-B-86	-
POLARIZING KEY RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
INSERTS	THERMOSET OR THERMOPLASTIC PPS PER MIL-M-24519	-
DUST COVER	CONDUCTIVE THERMOPLASTIC	-

NIC66GN402FF00SB0	"00"	MODULE A 211431-4 (SZ 22 POSTED SOCKET CONTACT; QTY=150) MODULE B 1-448138-2 (SZ 20 POSTED PIN CONTACT; QTY=60) MODULE C 211431-4 (SZ 22 POSTED SOCKET CONTACT; QTY=100)	2157108-1
DESCRIPTIVE NUMBER	KEYING POSITION	CONTACTS INCLUDED AND INSTALLED	PART NUMBER
		THIS DRAWING IS A CONTROLLED DOCUMENT.	
		DWN C.C.THOMAS 9-7-10	TE Connectivity
		CHK K.THACKSTON 9-7-10	
		APVD K.THACKSTON 9-7-10	NAME RCPT ASSY,SIZE 2,ARINC 600 (150/60/100), FR
		PRODUCT SPEC	
		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO
		WEIGHT	
		CUSTOMER DRAWING	A1 00779 C=2157108
		SCALE 3:2	SHEET 1 OF 1
		REV B	