

Click [here](#) for production status of specific part numbers.

MAX338/MAX339

8-Channel/Dual 4-Channel, Low-Leakage, CMOS Analog Multiplexers

General Description

The MAX338/MAX339 are monolithic, CMOS analog multiplexers (muxes). The 8-channel MAX338 is designed to connect one of eight inputs to a common output by control of a 3-bit binary address. The dual, 4-channel MAX339 is designed to connect one of four inputs to a common output by control of a 2-bit binary address. Both devices can be used as either a mux or a demux. On-resistance is 400Ω max, and the devices conduct current equally well in both directions.


These muxes feature extremely low off leakages (less than 20pA at $+25^\circ\text{C}$), and extremely low on-channel leakages (less than 50pA at $+25^\circ\text{C}$). The new design offers guaranteed low charge injection (1.5pC typ) and electrostatic discharge (ESD) protection greater than 2000V , per method 3015.7. These improved muxes are pin-compatible upgrades for the industry-standard DG508A and DG509A. For similar Maxim devices with lower leakage and charge injection but higher on-resistance, see the MAX328 and MAX329.

The MAX338/MAX339 operate from a single $+4.5\text{V}$ to $+30\text{V}$ supply or from dual supplies of $\pm 4.5\text{V}$ to $\pm 20\text{V}$. All control inputs (whether address or enable) are TTL compatible ($+0.8\text{V}$ to $+2.4\text{V}$) over the full specified temperature range and over the $\pm 4.5\text{V}$ to $\pm 18\text{V}$ supply range. These parts are fabricated with Maxim's 44V silicon-gate process.

Applications

- Data-Acquisition Systems
- Test Equipment
- Military Radios
- Guidance and Control Systems
- Sample-and-Hold Circuits
- Heads-Up Displays
- Communications Systems
- PBX, PABX

Pin Configurations/Functional Diagrams/Truth Tables

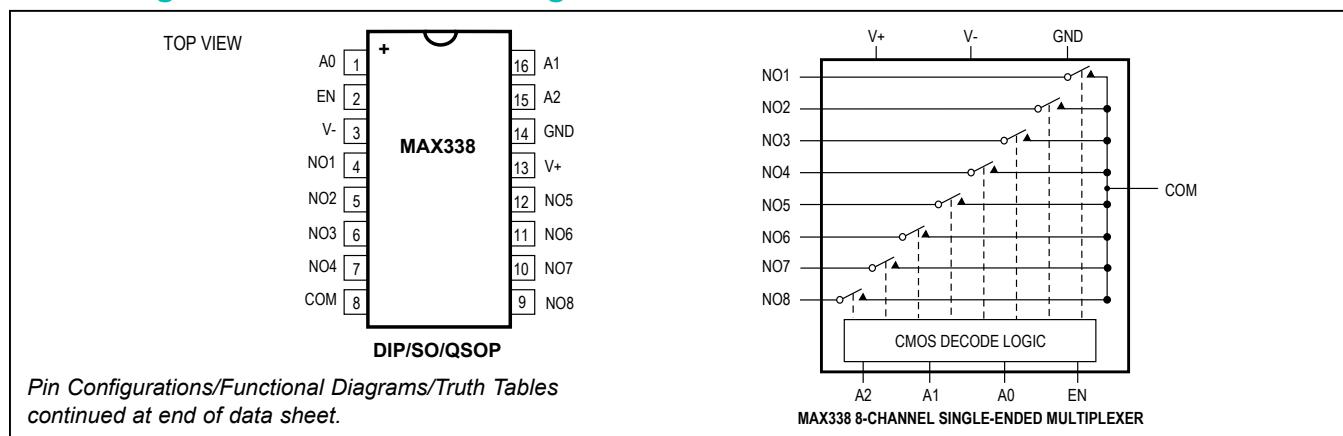

Absolute Maximum Ratings

Voltage Referenced to V

V+	-0.3V, 44V
GND	-0.3V, 25V
Digital Inputs, NO, COM (Note 1)	(V- - 2V) to (V+ + 2V) or 30mA (whichever occurs first)
Continuous Current (any terminal)	30mA
Peak Current, NO or COM (pulsed at 1ms, 10% duty cycle max)	100mA
Continuous Power Dissipation ($T_A = +70^\circ\text{C}$) Plastic DIP (derate 10.53mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	842mW
Narrow SO (derate 8.70mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	696mW
16 QSOP (derate 8.3mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	666.7mW

Note 1: Signals on NO, COM, EN, A0, A1, or A2 exceeding V+ or V- are clamped by internal diodes. Limit forward current to maximum current ratings.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Electrical Characteristics—Dual Supplies

($V_+ = +15\text{V}$, $V_- = -15\text{V}$, $V_{\text{GND}} = 0\text{V}$, $V_{\text{AH}} = +2.4\text{V}$, $V_{\text{AL}} = +0.8\text{V}$, $T_A = T_{\text{MIN}}$ to T_{MAX} , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
SWITCH							(Note 2)
Analog Signal Range	$V_{\text{NO}}, V_{\text{COM}}$	(Note 3)		-15		15	V
On-Resistance	R_{ON}	$I_{\text{NO}} = 0.2\text{mA}$, $V_{\text{COM}} = \pm 10\text{V}$	$T_A = +25^\circ\text{C}$		220	400	Ω
			$T_A = T_{\text{MIN}}$ to T_{MAX}			500	
On-Resistance Matching Between Channels	ΔR_{ON}	$I_{\text{NO}} = 0.2\text{mA}$, $V_{\text{COM}} = \pm 10\text{V}$ (Note 4)	$T_A = +25^\circ\text{C}$		4	10	Ω
			$T_A = T_{\text{MIN}}$ to T_{MAX}			15	
NO-Off Leakage Current (Note 5)	$I_{\text{NO(OFF)}}$	$V_{\text{COM}} = +10\text{V}$, $V_{\text{NO}} = \pm 10\text{V}$, $V_{\text{EN}} = 0\text{V}$	$T_A = +25^\circ\text{C}$	-0.02	0.001	0.02	nA
			$T_A = T_{\text{MIN}}$ to T_{MAX}	C, E	-1.25	1.25	
				M	-20	20	
			$T_A = +25^\circ\text{C}$	-0.05	0.005	0.05	
COM-Off Leakage Current (Note 5)	$I_{\text{COM(OFF)}}$	$V_{\text{NO}} = \pm 10\text{V}$, $V_{\text{COM}} = +10\text{V}$, $V_{\text{EN}} = 0\text{V}$	$T_A = T_{\text{MIN}}$ to T_{MAX}	C, E	-3.25	3.25	nA
				M	-40	40	
			$T_A = +25^\circ\text{C}$	-0.05	0.005	0.05	
		$V_{\text{COM}} = +10\text{V}$, $V_{\text{NO}} = \pm 10\text{V}$, $V_{\text{EN}} = 0\text{V}$	$T_A = T_{\text{MIN}}$ to T_{MAX}	C, E	-1.65	1.65	
				M	-20	20	
			$T_A = +25^\circ\text{C}$	-0.05	0.006	0.05	
COM-On Leakage Current (Note 5)	$I_{\text{COM(ON)}}$	$V_{\text{COM}} = \pm 10\text{V}$, $V_{\text{NO}} = \pm 10\text{V}$, Sequence each switch on	$T_A = T_{\text{MIN}}$ to T_{MAX}	C, E	-3.25	3.25	nA
				M	-40	40	
			$T_A = +25^\circ\text{C}$	-0.05	0.008	0.05	
		$V_{\text{COM}} = \pm 10\text{V}$, $V_{\text{NO}} = \pm 10\text{V}$, Sequence each switch on	$T_A = T_{\text{MIN}}$ to T_{MAX}	C, E	-1.65	1.65	
				M	-20	20	

Electrical Characteristics—Dual Supplies (continued)(V₊ = +15V, V₋ = -15V, V_{GND} = 0V, V_{AH} = +2.4V, V_{AL} = +0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS		
(Note 2)									
INPUT									
Input Current with Input Voltage High	I _{AH}	V _A = 2.4V or 15V		-1.0	0.001	1.0	µA		
Input Current with Input Voltage Low	I _{AL}	V _{EN} = 0V or 2.4V, V _A = 0V		-1.0		1.0	µA		
SUPPLY									
Power-Supply Range				±4.5	±20		V		
Positive Supply Current	I ₊	V _{EN} = V _A = 0V	T _A = +25°C	50	100		µA		
			T _A = T _{MIN} to T _{MAX}		150				
	I ₊	V _{EN} = 2.4V, V _{A(ALL)} = 2.4V	T _A = +25°C	290	500		µA		
			T _A = T _{MIN} to T _{MAX}		600				
Negative Supply Current	I ₋	V _{EN} = 0V or 2.4V, V _{A(ALL)} = 0V, 2.4V or 5V	T _A = +25°C	-1	1		µA		
			T _A = T _{MIN} to T _{MAX}	-10	10				
DYNAMIC									
Transition Time	t _{TRANS}	Figure 2	T _A = +25°C/ T _A = -55°C	200	500		ns		
			T _A = +125°C		650		ns		
Break-Before-Make Interval	t _{OPEN}	Figure 4	T _A = +25°C	10	140		ns		
Enable Turn-On Time	t _{ON(EN)}	Figure 3	T _A = +25°C	160	500		ns		
			T _A = T _{MIN} to T _{MAX}		750				
Enable Turn-Off Time	t _{OFF(EN)}	Figure 3	T _A = +25°C	100	500		ns		
			T _A = T _{MIN} to T _{MAX}		750				
Charge Injection (Note 3)	Q	C _L = 100pF, V _{NO} = 0V, R _S = 0Ω, Figure 6	T _A = +25°C	1.5	5		pC		
Off Isolation (Note 6)	V _{ISO}	V _{EN} = 0V, R _L = 1kΩ, f = 100kHz	T _A = +25°C	-75			dB		
Crosstalk Between Channels	V _{CT}	V _{EN} = 2.4V, f = 100kHz, V _{GEN} = 1V _{P-P} , R _L = 1kΩ, Figure 7	T _A = +25°C	-92			dB		
Logic Input Capacitance	C _{IN}	f = 1MHz	T _A = +25°C	2			pF		
NO-Off Capacitance	C _{NO(OFF)}	f = 1MHz, V _{EN} = V _{NO} = 0V, Figure 8	T _A = +25°C	3			pF		
COM-Off Capacitance	C _{COM(OFF)}	f = 1MHz, V _{EN} = 0.8V, V _{COM} = 0V, Figure 8	MAX338		11		pF		
			MAX339	T _A = +25°C	6				
COM-On Capacitance	C _{COM(ON)}	f = 1MHz, V _{EN} = 2.4V, V _{COM} = 0V, Figure 8	MAX338		16		pF		
			MAX339	T _A = +25°C	9				

Electrical Characteristics—Single Supply(V₊ = +12V, V₋ = 0V, V_{GND} = 0V, V_{AH} = +2.4V, V_{AL} = +0.8V, T_A = T_{MIN} to T_{MAX}, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		MIN	TYP	MAX	UNITS
SWITCH							(Note 2)
Analog Signal Range	V _{NO} , V _{COM}	(Note 3)			0	12	V
On-Resistance	R _{ON}	I _{NO} = 0.2mA V _{COM} = 3V or 10V	T _A = +25°C	460	650	650	Ω
DYNAMIC							
Transition Time (Note 3)	t _{TRANS}	V _{NO1} = 8V, V _{NO8} = 0V, V _{IN} = 2.4V, Figure 1	T _A = +25°C/ T _A = -55°C	210	500	500	ns
				800	800	800	ns
Enable Turn-On Time (Note 3)	t _{ON(EN)}	V _{INH} = 2.4V, V _{INL} = 0V, V _{NO1} = 5V, Figure 3	T _A = +25°C	280	500	500	ns
Enable Turn-Off Time (Note 3)	t _{OFF(EN)}	V _{INH} = 2.4V, V _{INL} = 0V, V _{NO1} = 5V, Figure 3	T _A = +25°C	110	500	500	ns
Charge Injection (Note 3)	Q	C _L = 100pF, V _{NO} = 0V, R _S = 0Ω	T _A = +25°C	1.8	5	5	ns

Note 2: The algebraic convention where the most negative value is a minimum and the most positive value a maximum is used in this data sheet.

Note 3: Guaranteed by design.

Note 4: $\Delta R_{ON} = R_{ON(MAX)} - R_{ON(MIN)}$.

Note 5: Leakage parameters are 100% tested at the maximum rated hot temperature and guaranteed by correlation at +25°C.










Note 6: Worst-case isolation is on channel 4 because of its proximity to the drain pin. Off isolation = $20\log V_{COM}/V_{NO}$, where V_{COM} = output and V_{NO} = input to off switch.

MAX338/MAX339

8-Channel/Dual 4-Channel, Low-Leakage, CMOS Analog Multiplexers

Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

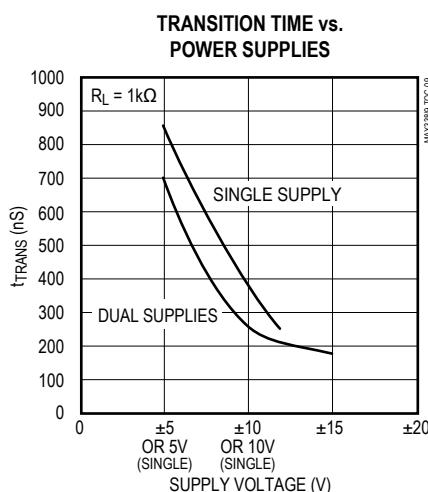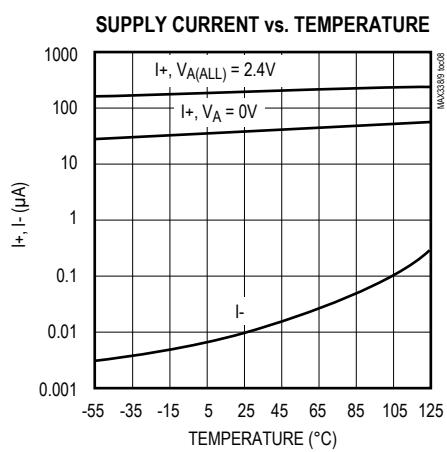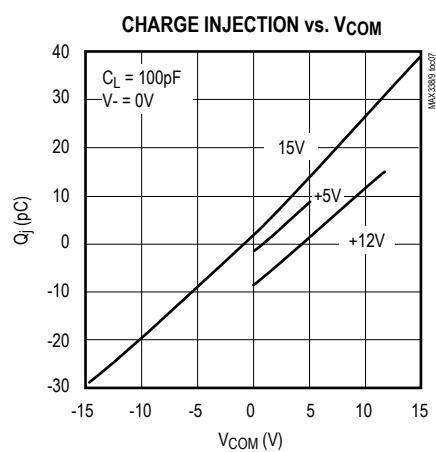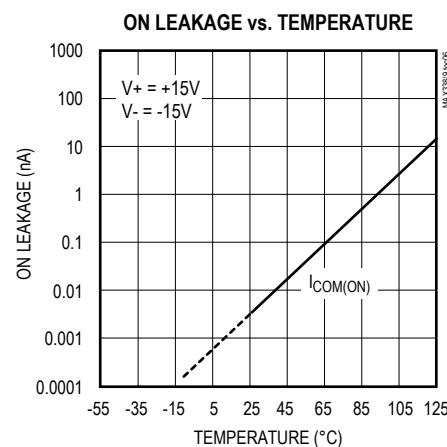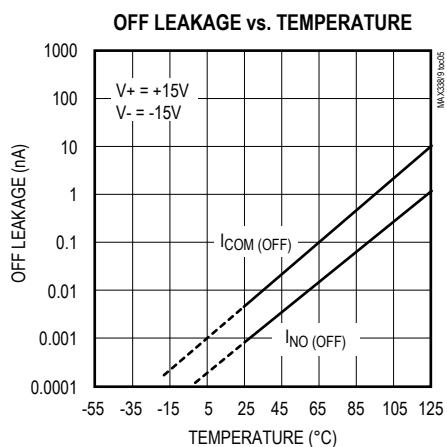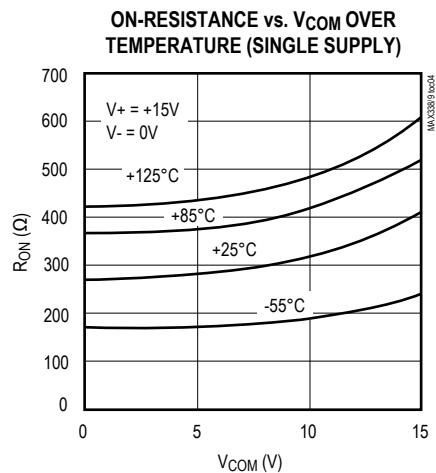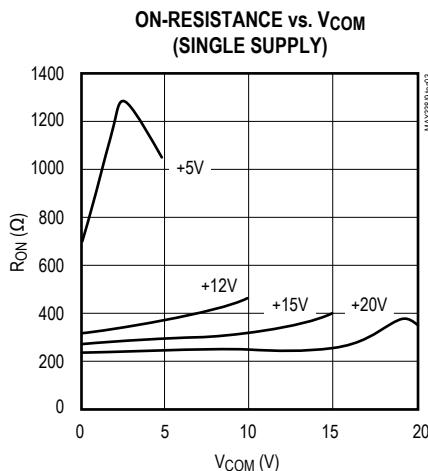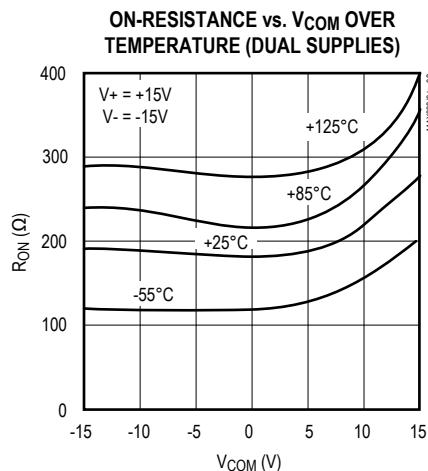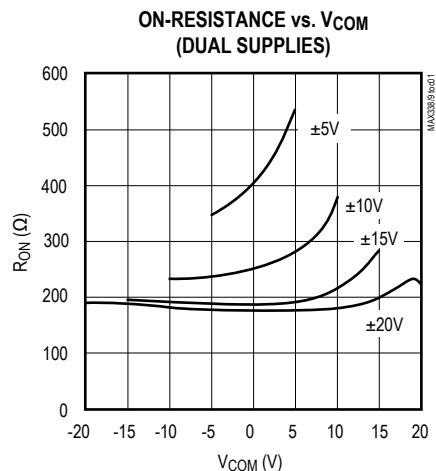

Pin Description

PIN				NAME	FUNCTION
MAX338		MAX339			
DIP/SO/QSOP	TQFN-EP	DIP/SO/QSOP	TQFN-EP		
1, 15, 16,	15, 14, 13	—	—	A0, A2, A1	Address Inputs
—	—	1, 16	15, 14	A0, A1	Address Inputs
2	16	2	16	EN	Enable
3	1	3	1	V-	Negative-Supply Voltage Input
4–7	2–5	—	—	NO1–NO14	Analog Inputs—Bidirectional
—	—	4–7	2–5	NO1A–NO4A	Analog Inputs—Bidirectional
8	6	—	—	COM	Analog Output—Bidirectional
—	—	8, 9	6, 7	COMA, COMB	Analog Outputs—Bidirectional
9–12	7–10	—	—	NO8–NO5	Analog Inputs—Bidirectional
—	—	10–13	8–11	NO4B–NO1B	Analog Inputs—Bidirectional
13	11	14	12	V+	Positive-Supply Voltage Input
14	12	15	13	GND	Ground
—	—	—	—	Exposed Pad	Exposed Pad (TQFN only). Connect EP to V+.

Applications Information

Operation with Supply Voltages Other than 15V

Using supply voltages less than $\pm 15\text{V}$ will reduce the analog signal range. The MAX338/MAX339 switches operate with $\pm 4.5\text{V}$ to $\pm 20\text{V}$ bipolar supplies or with a $+4.5\text{V}$ to $+30\text{V}$ single supply. Connect V- to GND when operating with a single supply. Both device types can also operate with unbalanced supplies such as $+24\text{V}$ and -5V . The *Typical Operating Characteristics* graphs show typical on-resistance with 20V , 15V , 10V , and 5V supplies. (Switching times increase by a factor of two or more for operation at 5V .)

Overvoltage Protection

Proper power-supply sequencing is recommended for all CMOS devices. Do not exceed the absolute maximum ratings, because stresses beyond the listed ratings may cause permanent damage to the devices. Always sequence V+ on first, then V-, followed by the logic inputs NO and COM. If power-supply sequencing is not possible, add two small signal diodes in series with supply pins for overvoltage protection (Figure 1). Adding diodes reduces the analog signal range to 1V below V+ and 1V above V-, but does not affect the devices' low switch resistance and low leakage characteristics. Device operation is unchanged, and the difference between V+ and V- should not exceed 44V.

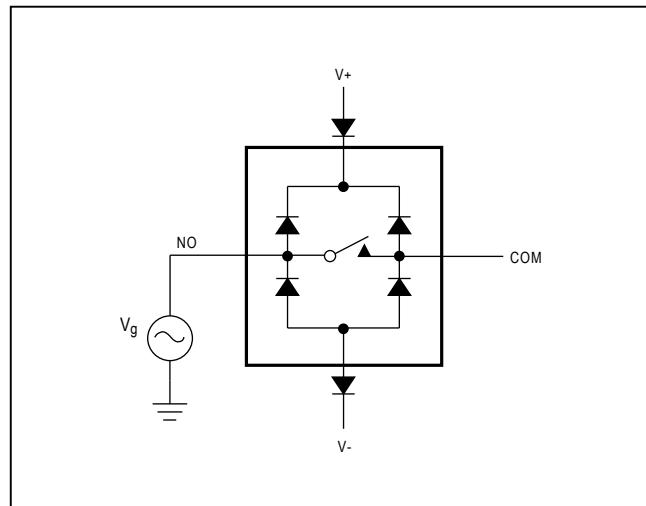


Figure 1. Overvoltage Protection Using External Blocking Diodes

Test Circuits/Timing Diagrams

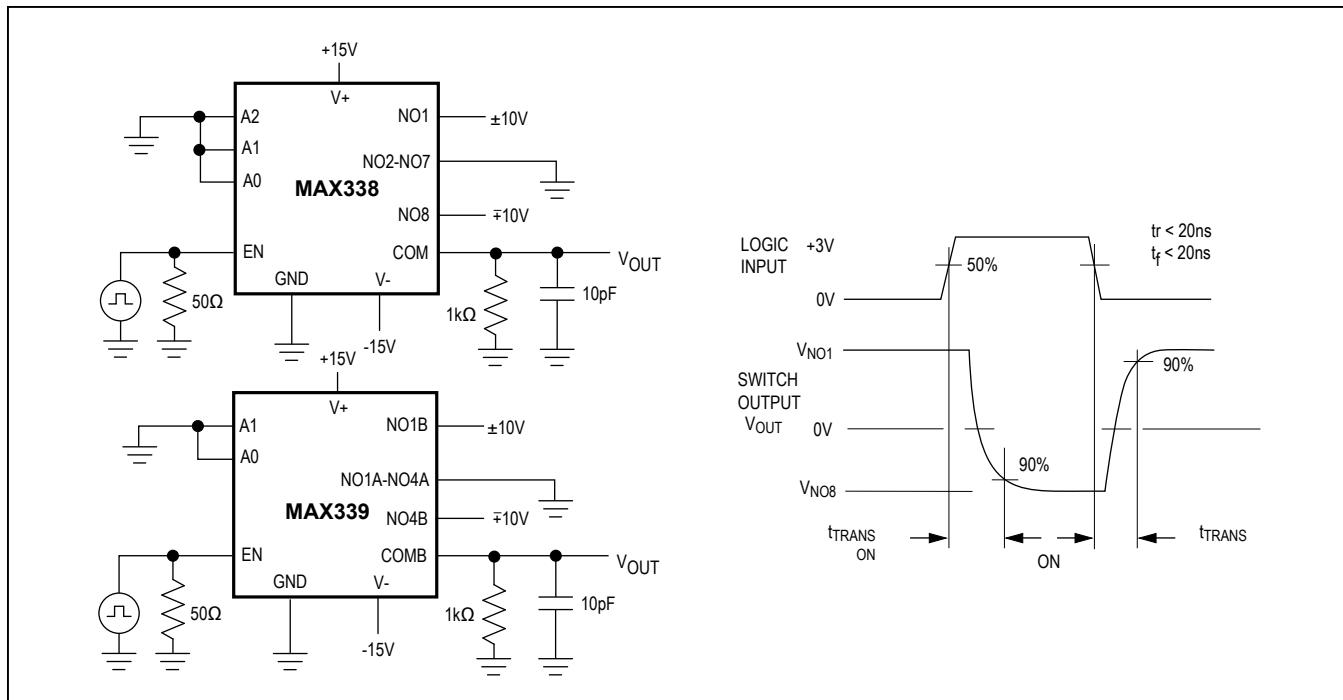


Figure 2. Transition Time

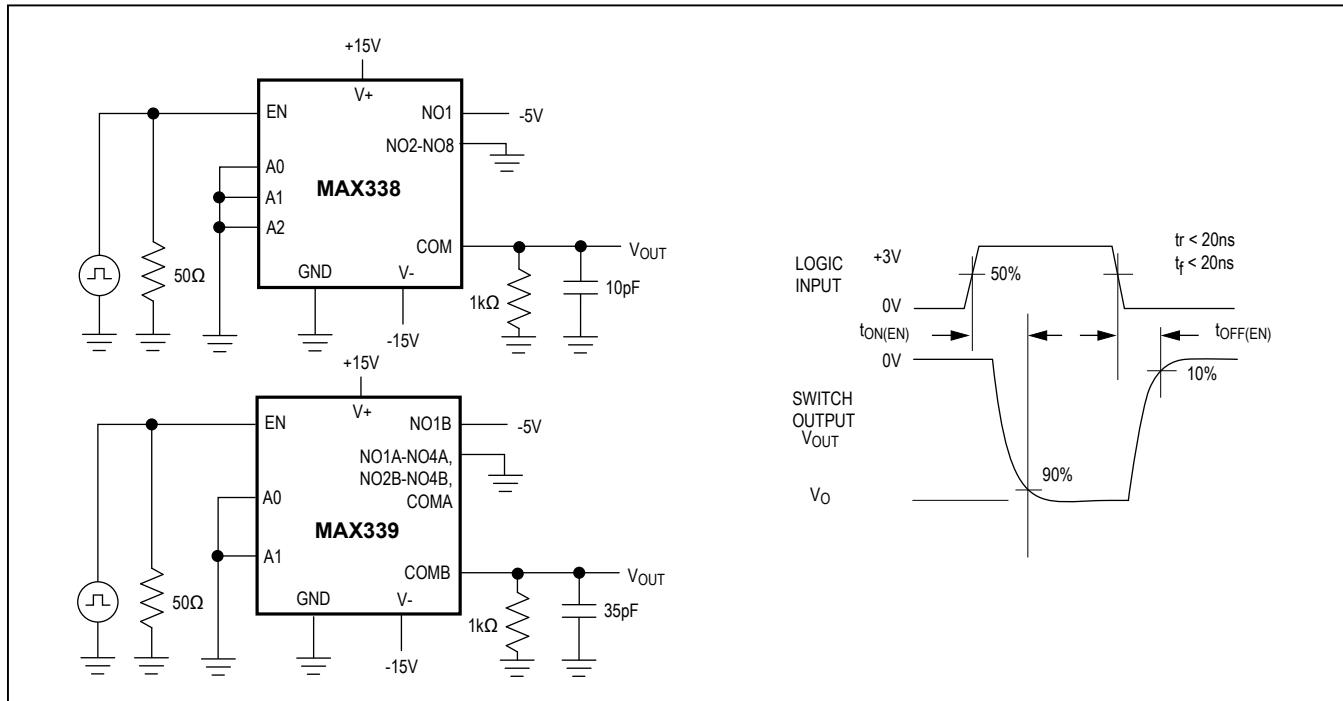


Figure 3. Enable Switching Time

Test Circuits/Timing Diagrams (continued)

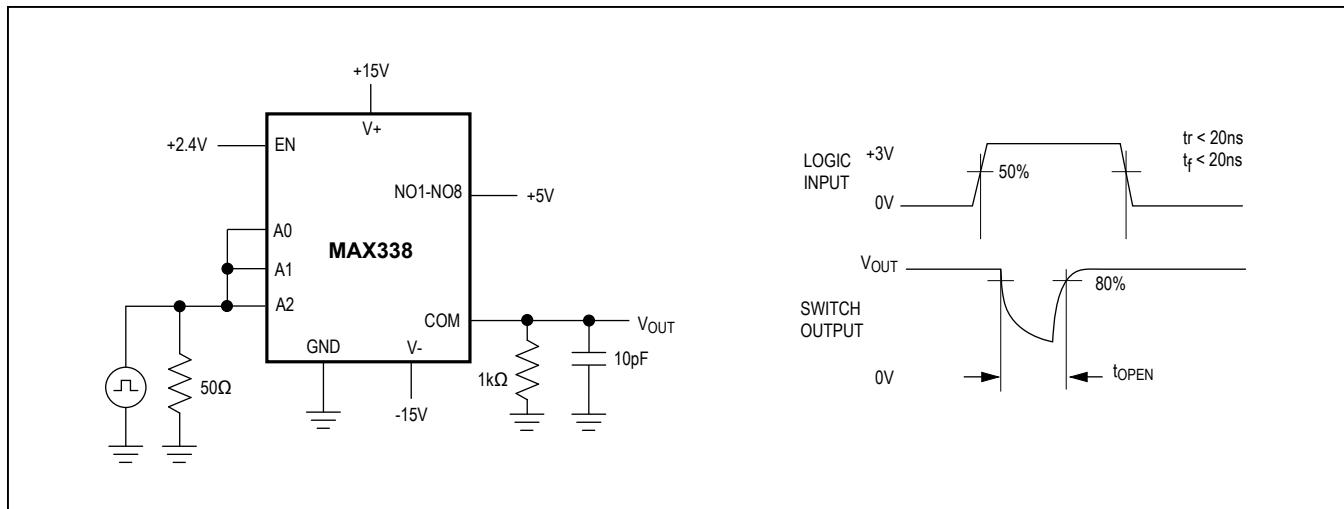


Figure 4. Break-Before-Make Interval

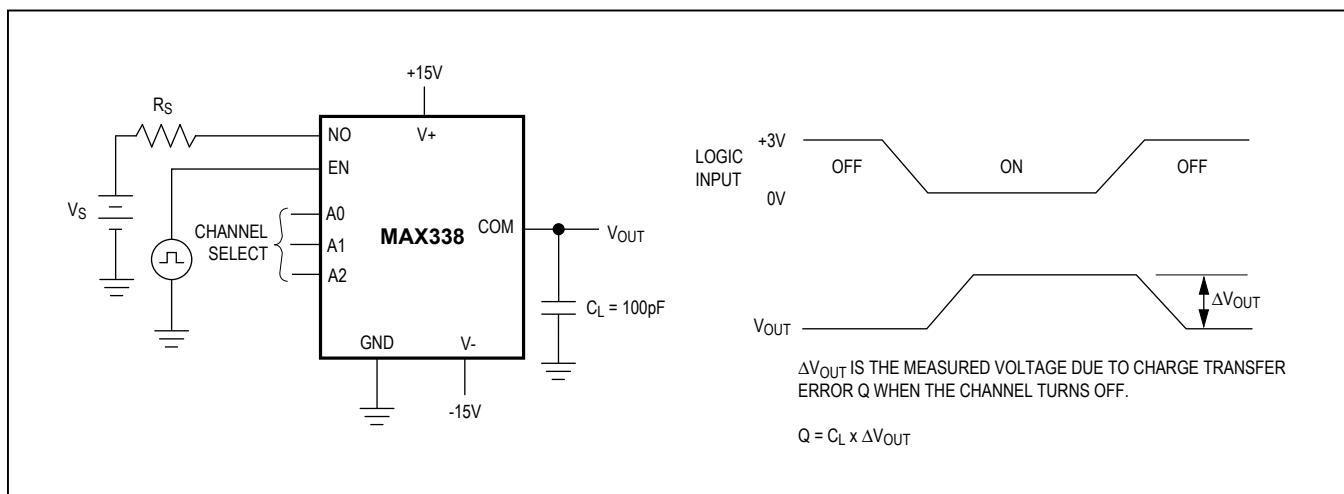


Figure 5. Charge Injection

MAX338/MAX339

8-Channel/Dual 4-Channel,
Low-Leakage, CMOS Analog Multiplexers

Test Circuits/Timing Diagrams (continued)

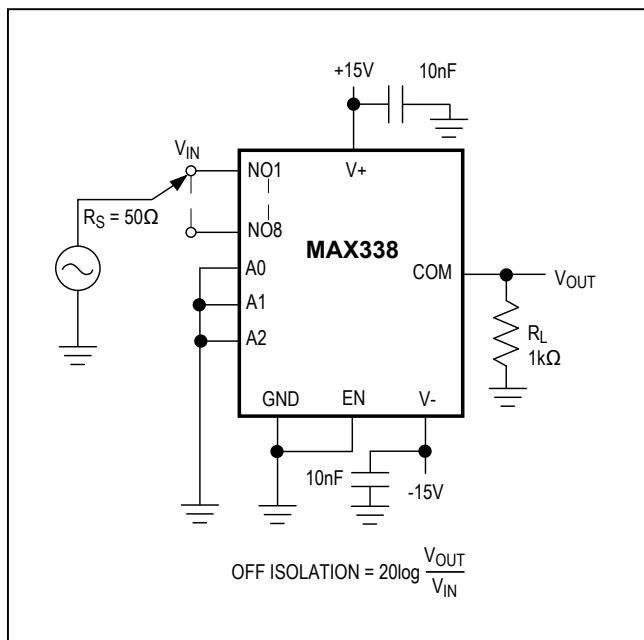


Figure 6. Off-Isolation

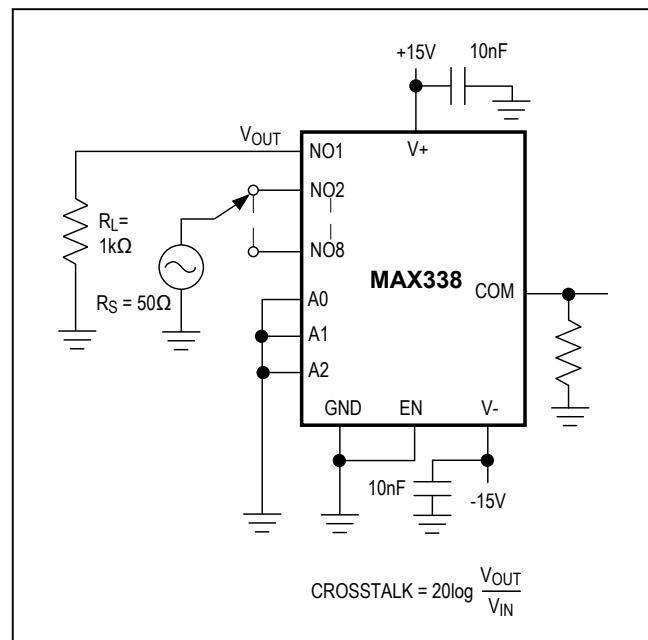


Figure 7. Crosstalk

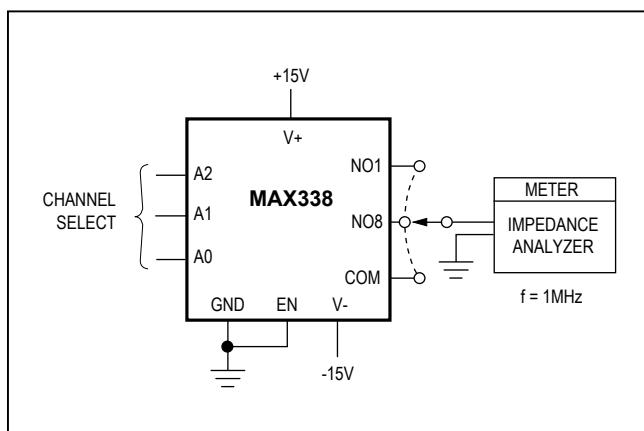




Figure 8. NO/COM Capacitance

MAX338/MAX339

8-Channel/Dual 4-Channel,
Low-Leakage, CMOS Analog Multiplexers

Pin Configurations/Functional Diagrams/Truth Tables (continued)

TOP VIEW

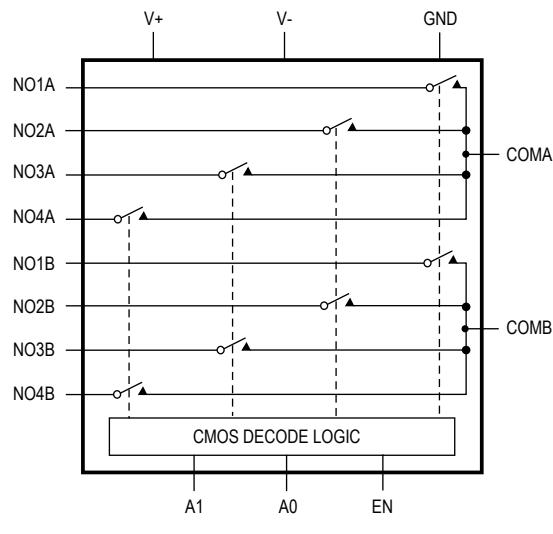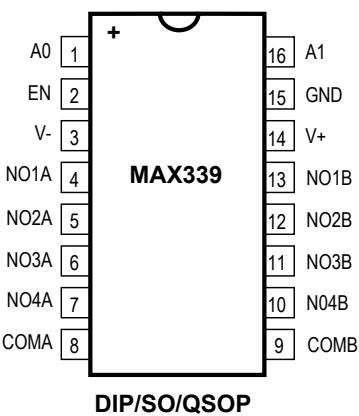

A2	A1	A0	EN	ON SWITCH
X	X	X	0	None
0	0	0	1	1
0	0	1	1	2
0	1	0	1	3
0	1	1	1	4
1	0	0	1	5
1	0	1	1	6
1	1	0	1	7
1	1	1	1	8

MAX338


LOGIC "0" $V_{AL} \geq 0.8V$, LOGIC "1" $V_{AH} \geq 2.4V$

A1	A0	EN	ON SWITCH
X	X	0	None
0	0	1	1
0	1	1	2
1	0	1	3
1	1	1	4

MAX339

LOGIC "0" $V_{AL} \geq 0.8V$, LOGIC "1" $V_{AH} \geq 2.4V$

Pin Configurations/Functional Diagrams/Truth Tables (continued)

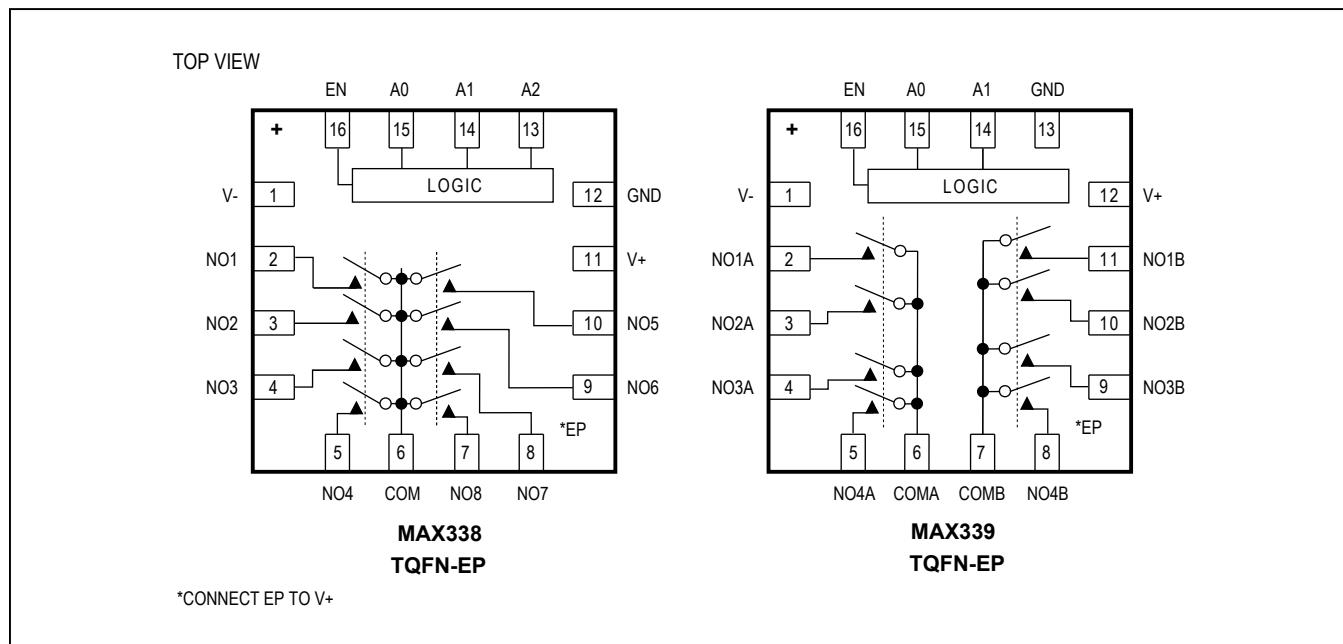

Ordering Information (continued)

PART	TEMP RANGE	PIN-PACKAGE
MAX338EPE+	-40°C to +85°C	16 PDIP
MAX338ESE+	-40°C to +85°C	16 Narrow SO
MAX338EJE	-40°C to +85°C	16 CERDIP
MAX338MJE	-55°C to +125°C	16 CERDIP***
MAX338MSE/PR3+	-55°C to +125°C	16 Narrow SO
MAX339CEE+	0°C to +70°C	16 QSOP
MAX339CPE+	0°C to +70°C	16 PDIP
MAX339CSE+	0°C to +70°C	16 Narrow SO
MAX339C/D	0°C to +70°C	Dice*

PART	TEMP RANGE	PIN-PACKAGE
MAX339EEE+	-40°C to +85°C	16 QSOP
MAX339ETE+	-40°C to +85°C	16 TQFN-EP** (5mm x 5mm)
MAX339EPE+	-40°C to +85°C	16 PDIP
MAX339ESE+	-40°C to +85°C	16 Narrow SO
MAX339EJE	-40°C to +85°C	16 CERDIP
MAX339MJE	-55°C to +125°C	16 CERDIP***
MAX339MSE/PR3+	-55°C to +125°C	16 Narrow SO

*Contact factory for dice specifications.

**EP = Exposed Pad

***Contact factory for availability.

+Denotes a lead(Pb)-free/RoHS-compliant package.

Package Information

For the latest package outline information and land patterns (footprints), go to www.maximintegrated.com/packages. Note that a “+”, “#”, or “-” in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

PACKAGE TYPE	PACKAGE CODE	OUTLINE NO.	LAND PATTERN NO.
16 PDIP	P16+1	21-0043	—
16 Narrow SO	S16+1	21-0041	90-0097
16 QSOP	E16+5	21-0055	90-0167
16 TQFN-EP	T1655+3	21-0140	90-0073
16 CDIP	J16+4	21-0045	—

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
4	4/12	Added the MAX338CEE+ / MAX338EEE+/ MAX338MSE /PR3 / MAX339CEE+ / MAX339EEE+ part and packaging information	1, 2, 6, 10, 11
5	10/17	Updated <i>Ordering Information</i> table	11
6	5/19	Updated <i>Electrical Characteristics</i> table	3, 4

For pricing, delivery, and ordering information, please visit Maxim Integrated's online storefront at <https://www.maximintegrated.com/en/storefront/storefront.html>.

Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.