

| — | G | П | m | D | 0 |
|----------|---|---|---|---|---|



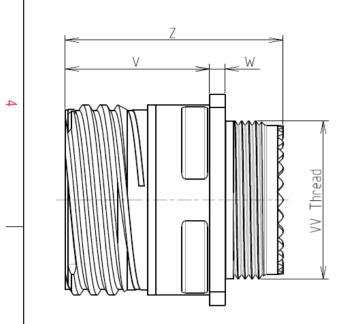

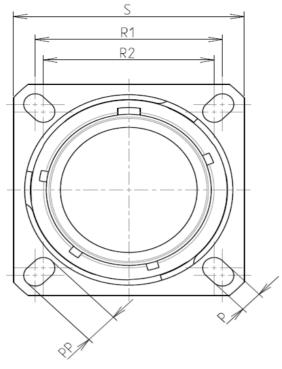

Keying Shown as e

CHARACTERISTICS

ω

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : W = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Aluminium | | | | |
|--|--|--|--|--|--|
| -Shell Plating | : Olive drab Cadmium | | | | |
| -Insulator | : Thermoplastic | | | | |
| -Contacts | : Copper Alloy | | | | |
| -Seals & Grommet | : Silicon Elastomer | | | | |
| -Contact Plating | : Gold over copper Alloy $0.8 \mu m$ minimum | | | | |
| -Durability | : 500 Mating cycles | | | | |
| -Delivered with Souriau contacts and Accessories | | | | | |
| -Temperature Range | : -65°C to +175°C | | | | |
| -Salt Spray | : 500 hours | | | | |

: 14.95 g ± 10%

8D 0

G

11

-

W

01

В Е

F

| Dim | Nominal |
|-----------|---------------|
| Р | 3.25±0.2 |
| PP | 4.93±0.2 |
| R1 | 20.62 |
| R2 | 18.26 |
| S | 26.2±0.3 |
| V | 20.83+0/-1.25 |
| W | 2.1/2.5 |
| Z | 31.5 Max |
| VV THREAD | M15x1-6g |

| r | Π | C | , | C | | Φ | Þ | | - | |
|---|---------------|-------------|--|--|------------------------------------|-----------------------|------------------------------|----------|----|--|
| | | | | | YOUT SHOWN AS EXA | MPLE | | | 4 | |
| | | | | LA | | | | | | |
| s example | | | | | | | | | | |
| Connector | dimension | 7 | | | | | | | | |
| Dim | Nominal | - | | | | | | | | |
| P | 3.25±0.2 | 1 | [| | | | | | ├┦ | |
| PP | 4.93±0.2 | - | SOURIAU shall not be liable for any non-conformity or damage | | | | | | | |
| R1 | 20.62 | 1 | due to a use of the Products which does not comply with | | | | | | | |
| R2 | 18.26 | | the Specifications issued by either of the Parties or by a third party | | | | | | | |
| S | 26.2±0.3 | | | (professi | onal recommendation | n, technical notice.) | | | | |
| V | 20.83+0/-1.25 | 1 | | | | | | | | |
| W | 2.1/2.5 | 4 | | | Country | | & Control List |] | | |
| Z | 31.5 Max | 4 | | | FR | Not I | listed |] | 2 | |
| VV THREAD | M15x1-6g | | | PN: 8D011W01BE | | | | | | |
| | | | A 07-10-201 | 16 First Release | | | | J | 1 | |
| | | | ISS DATE | Latest modificatio | n - hy | | | MOD N° | - | |
| | | | Designed By: | Date: | ЛТОУ | CUS | OMER DRAWING | | | |
| | | | TITLE | | | | | | - | |
| | | | SCALE | . 1 | Constalling | | | | - | |
| | | | NA | $\bigcirc \bigcirc$ | General linear Tolerances: ± | NI | PRDS / PROJECT 859 | | 1 | |
| | | - | | | | | This document is the prop | perty of | | |
| ORIENTATION : E CONTACT TYPE : SOCKET(500 Matings) | | | SOURIAL | SOURIAU WWW.SOURIAU.COM SOURIAU it must not be reproduced or communicated without permission | | | | | | |
| | | | FORMAT | | | | | | - | |
| | CONTACT LAY | OUT : 11-01 | | | SOURIAU E | | | SHEET | | |
| | I | | A3 | | 8D011W0 | 1BE-C | | 1/2 | | |
| | E | |) | С | | В | Α | | ſ | |
| | V | / | | | | | | | | |

| | | ۵ | г – – – – – – – – – – – – – – – – – – – | m | D | 0 |
|----------|-----|-----------------------------|---|---|-----------------------------------|---|
| | | Contact Layout | | | | Panel Cutout |
| 4 | (| 01 | | | 22 | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| | Ctc | 1#12 11-01 X Y 0 0 | | | ¥ | Dim |
| ى ن | | | L | | | ØA ØAA R1 ØT |
| | | | | | | SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati |
| а | | | | | A 07-10-202 | Country FR PN: 8D011W |
| | | | | | ISS DATE Designed By: TITLE | Latest modification - by Date: Aluminium |
| <u> </u> | | | | | SCALE NA SOURIAU | General linear Tolerances: ± |
| | | - | - | | FORMAT A3 | SOURIAU 8D011W0 |
| | Н | l G | F F | E | D | C |

