



## Surface-mount Fuses Telecom Fuses

The telecom FT600 fuse helps telecommunications equipment manufacturers comply with North American overcurrent protection requirements, including Telcordia GR-1089, TIA-968-A (formerly FCC Part 68), and UL60950 3rd edition.

TE Circuit Protection's telecom fuses offer low temperature-rise performance under sneak current fault events to help prevent damage to circuit traces or multilayer boards, and their low profile and small footprint make them suitable for high-density and space-constrained applications.



### Benefits

- High density placement in multi-port system designs
- Improved temperature rise performance over other similar surface-mount fuse devices under sneak current testing
- The FT600, in conjunction with a thyristor surge suppression device, assists designers to meet regulatory standards without additional series components

### Features

- Lead free materials and RoHS compliant
- Halogen free  
(refers to: Br≤900ppm, Cl≤900ppm, Br+Cl≤1500ppm)
- Low profile and small footprint
- The lightning robust surface-mount fuse offers overcurrent protection in case of power fault events
- Enables the design of equipment complying with applicable telecom specifications including UL60950, TIA-968-A, and Telcordia GR-1089
- Low resistance

### Applications

- ADSL, ADSL2, ADSL2plus, SHDSL, VDSL linecards and modems
- T1/E1 systems
- Twisted-pair telecom ports requiring Telcordia GR-1089, UL60950 and FCC Part TIA-968-A compliance

## Protection Application Guide for Telecommunications and Networking Devices

To use this guide, follow the steps below:

1. Select your equipment type from the guide below.
2. Use the Key Device Selection Criteria (time-to-open, surface temperature) to determine best suitability for your application.
3. Use Agency Specification / Selection Guide to select a specific part number for each application based on the agency requirements.

### Key Device Selection Criteria

Application	Specification	Faster Time-To-Open	Cooler Surface Temperature
<b>Customer premises equipment, IT equipment</b>	UL 60950	FT600-0500	FT600-2000
Analog modems, V.90 modems, ISDN modems, xDSL modems, ADSL splitters, phone sets, fax machines, answering machines, caller ID, internet appliances, PBX systems, POS terminals, wall plugs	TIA-968-A	FT600-1250	
<b>Access network equipment</b>	Telcordia GR-1089	FT600-1250	FT600-2000
Remote terminals, line repeaters, multiplexers, cross-connects, WAN equipment	TIA-968-A		
<b>Central office switching equipment</b>	Telcordia GR-1089	FT600-1250	FT600-2000
Analog/POTS linecards, ISDN linecards, xDSL modems, ADSL/VDSL splitters, T1/E1 linecards, multiplexers, CSU/DSU, servers	TIA-968-A		

**Note:** This list is not exhaustive. TE Circuit Protection welcomes our customers' input for additional application ideas for overcurrent protection of telecom applications.

## Agency Specification/Selection Guide for FT600 Devices

Use the guide below to select FT600 devices appropriate for use in your application. The following pages contain specifications for part numbers recommended below. FT600 devices enable telecommunication equipment to meet the applicable protection requirements of these industry specifications. Refer to individual agency specifications for test procedures and circuit schematics. Users should independently evaluate the suitability of, and test each product for their application.

Family	Product	Lightning	Power Cross
FT600	FT600-0500	TIA-968-A – Types A & B	UL60950, 3rd Ed. – 600V <sub>AC</sub> , 40A
	FT600-1250	Telcordia GR-1089 – Level 1 and 2	Telcordia GR-1089 – 600 V <sub>AC</sub> , 40A
	FT600-2000	TIA-968-A	UL60950

**Notes:** FT600-1250 and FT600-2000 assist equipment in complying with Telcordia GR-1089 specifications. In-circuit testing is strongly recommended. The FT600-0500, FT600-1250 and FT600-2000 help meet the UL60950 Power Cross and FCC TIA-968-A 68 lightning surge requirements. Note that Type A tests allow for an overcurrent protection component to fuse open during the surge.

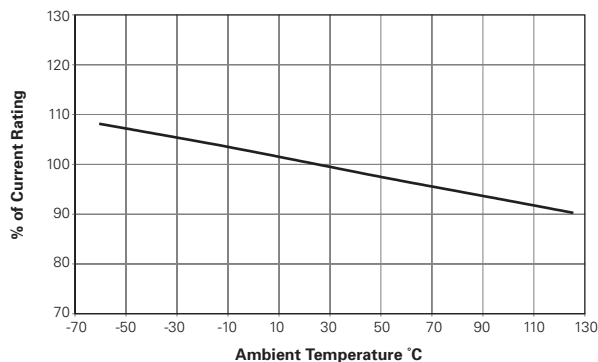
## Table FT1 Interrupt Voltage and Current Ratings for FT600 Devices

Part Number	Ampere Rating (A)	Voltage Rating (V)	Typical Resistance (Ω)	Typical I <sup>2</sup> t (A <sup>2</sup> s)*
FT600-0500	0.50	250	0.50	1
FT600-1250	1.25	250	0.10	16
FT600-2000	2.00	250	0.05	18

**Note:** The FT600-xxxx devices carry 100% of rated current for 4 hours minimum and 250% of rated current for 1 second minimum, 120 seconds maximum. Resistance measured at 10% of rated current.


\*I<sup>2</sup>t is calculated at 10 ms or less.

## Figure FT1 Thermal Derating Curve (Normalized) for FT600 Devices



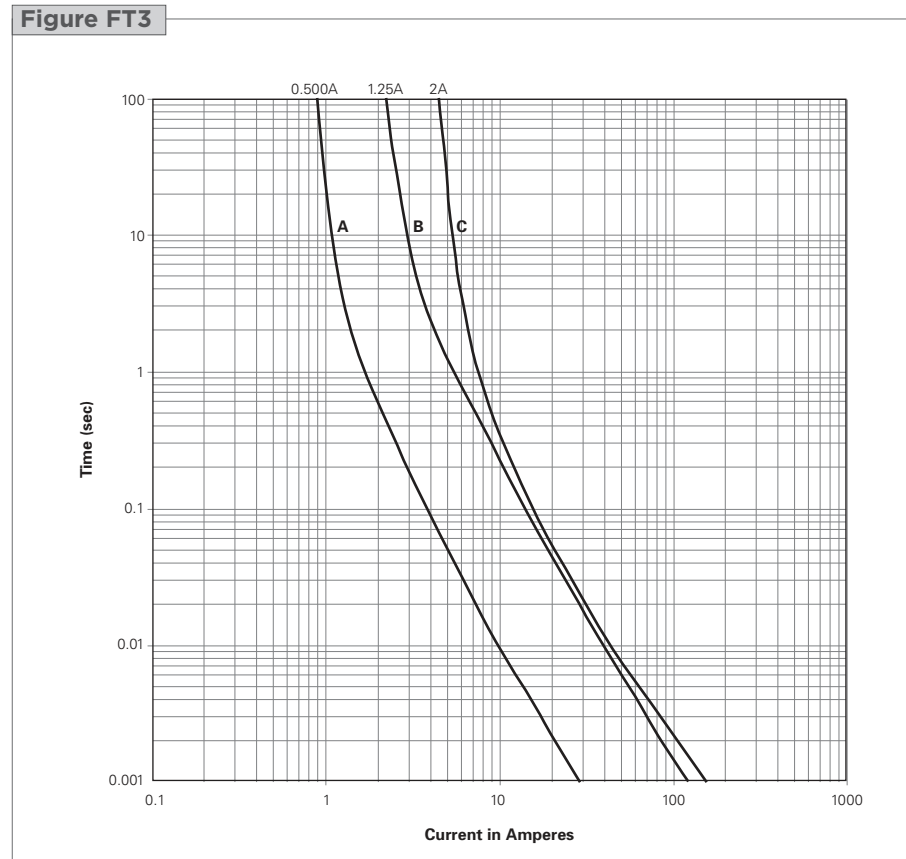
**Table FT2** Dimensions for FT600 Devices in Millimeters (Inches)

Part Number	A		B		C		Figure
	Min.	Max.	Min.	Max.	Min.	Max.	
FT600-0500	—	10.2 (0.402)	—	3.1 (0.122)	—	3.1 (0.122)	FT2
FT600-1250	—	10.2 (0.402)	—	3.1 (0.122)	—	3.1 (0.122)	FT2
FT600-2000	—	10.2 (0.402)	—	3.1 (0.122)	—	3.1 (0.122)	FT2

**Figure FT2** Dimension Figures for FT600 Devices

**Figure FT3** Typical Time-to-open Characteristics (at 20°C) for FT600 Devices

**FT600**

- A = FT600-0500
- B = FT600-1250
- C = FT600-2000

**Figure FT3**


**Table FT3 Physical Characteristics and Environmental Specifications for FT600 Devices**

**Physical Characteristics**

Terminal material	Silver-plated brass*
Body material	Ceramic
Termination solderability	Per IEC-60127-4

\*FT600 devices use high Pb content solder for internal construction. They are RoHS compliant.

**Environmental Specifications**

Test	Conditions
Solder heat withstand	Per MIL-STD-202, Method 210, Test Condition J
Solvent resistance	Per MIL-STD-202F, Method 215J
Storage temperature	≤30°C/ 85% RH
Storage humidity	Per MIL-STD-202F, Method 106F

**Table FT4 Packaging and Marking Information for FT600 Devices**

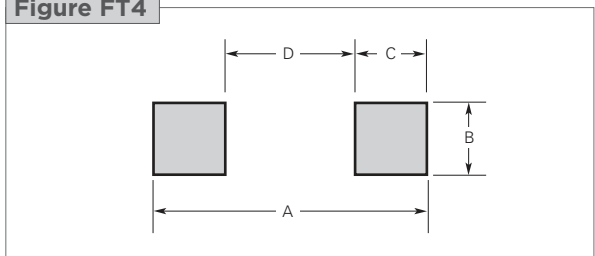
Part Number	Bag Quantity	Tape & Reel Quantity	Standard Package Quantity	Part Marking	Agency Recognition
FT600-0500-2	—	2,500	10,000	500	UL, CSA
FT600-1250-2	—	2,500	10,000	1250	UL, CSA
FT600-2000-2	—	2,500	10,000	2000	UL, CSA

**Note:** The -2 designates tape and reel, the package style for this product.

**Table FT5 Recommended Pad Layouts for FT600 Devices in Millimeters (Inches) Nominal**

Device	A	B	C	D	Figure for Dimensions
FT600-0500	12.6 (0.496)	4.0 (0.157)	3.7 (0.145)	5.2 (0.204)	FT4
FT600-1250	12.6 (0.496)	4.0 (0.157)	3.7 (0.145)	5.2 (0.204)	FT4
FT600-2000	12.6 (0.496)	4.0 (0.157)	3.7 (0.145)	5.2 (0.204)	FT4

**Figure FT4**



**Solder Reflow and Rework Recommendations for FT600 Devices**

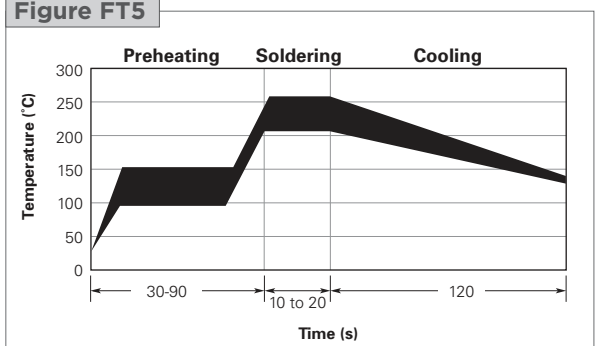
**Solder Reflow**

- Recommended reflow methods: IR, vapor phase oven, hot air oven
- Devices can be cleaned using standard industry methods and solvents

**Rework**

- If a device is removed from the board, it should be discarded and replaced by a new device

**Figure FT5**

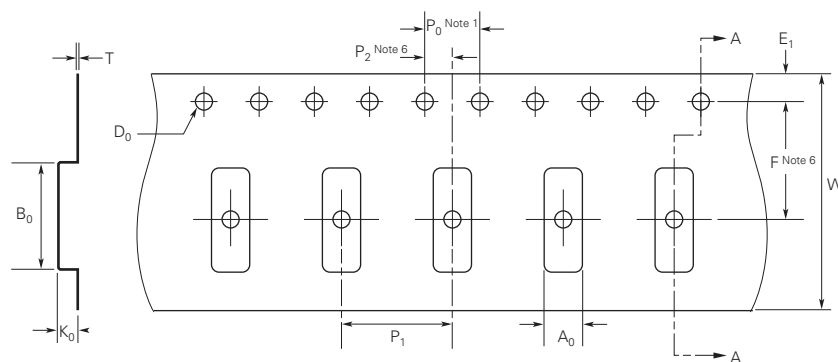


**Table FT6** Tape and Reel Specifications for FT600 Devices

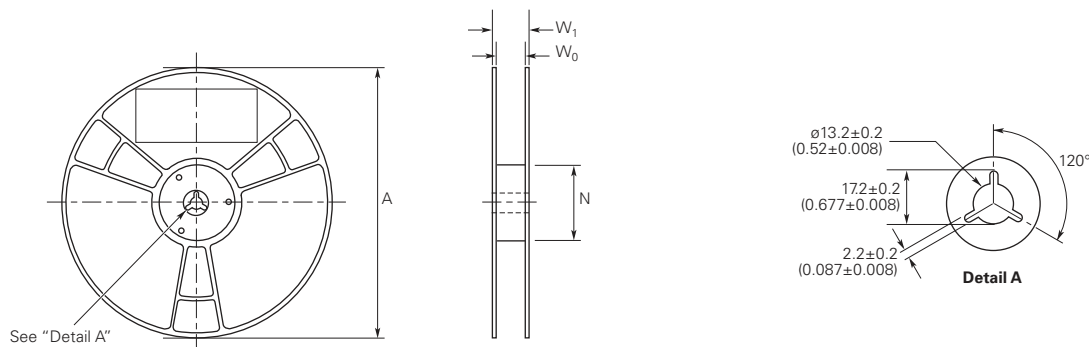
Dimension Description	EIA Mark	Dimension (mm)	Tolerance
Carrier tape width	W	24	±0.3
Sprocket hole pitch	P <sub>0</sub>	4	±0.1
	P <sub>1</sub>	8	±0.1
	P <sub>2</sub>	2	±0.1
	A <sub>0</sub>	3.68	±0.1
	B <sub>0</sub>	10.44	±0.1
Sprocket hole diameter	D <sub>0</sub>	1.5	+0.1 / -0.0
	F	11.5	±0.1
	E <sub>1</sub>	1.75	±0.1
Tape thickness	T max.	0.3	±0.05
	K <sub>0</sub>	3.25	+1.0 / -0.05

**Reel Dimensions**

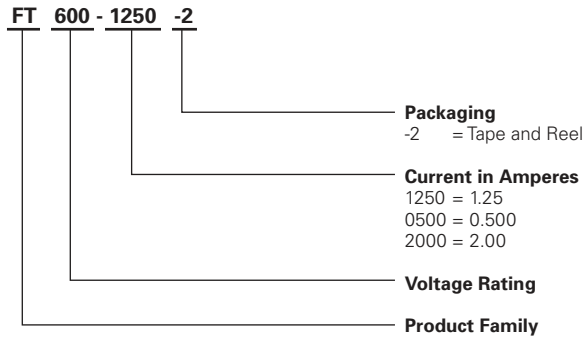
Reel diameter	A max.	331.5	
Core diameter	N min.	98.5	
Space between flanges less devices	W <sub>0</sub>	25	±0.5
Reel width	W <sub>1</sub> max.	31	

**Figure FT6** EIA Referenced Taped Component Dimensions for FT600 Devices

**Notes:**

- 10 sprocket hole pitch cumulative tolerance ±0.2
- Allowable camber to be 1mm/250mm
- Material: Black conductive
- A<sub>0</sub> and B<sub>0</sub> measured on a plane 0.3mm above the bottom of the pocket
- K<sub>0</sub> measured from the plane on the inside bottom of the pocket to the top surface of the carrier
- Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole
- Quantity per reel to be 174m

**Figure FT7** EIA Referenced Reel Dimensions for FT600 Devices


## Part Numbering System for FT600 Devices



### Warning :

All information, including illustrations, is believed to be accurate and reliable. Users, however, should independently evaluate the suitability of and test each product selected for their application. Tyco Electronics Corporation and/or its Affiliates in the TE Connectivity Ltd. family of companies ("TE") makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. TE's only obligations are those in the TE Standard Terms and Conditions of Sale for this product, and in no case will TE be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Specifications are subject to change without notice. In addition, TE reserves the right to make changes to materials or processing that do not affect compliance with any applicable specification without notification to Buyer.