

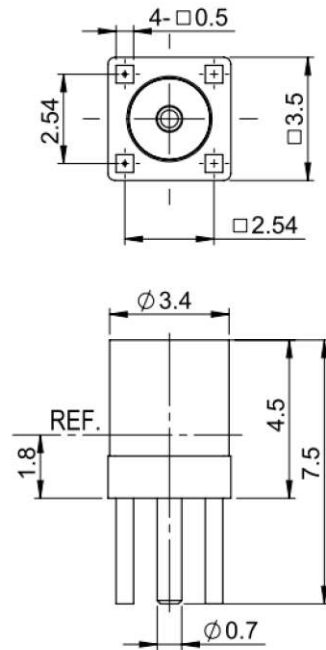


PAGE 1/2	ISSUE 1422A	SERIES ECO MMCX	PART NUMBER R110A426000
----------	-------------	-----------------	-------------------------




**PANEL CUT OUT**

mm		
	Maxi	mini
A	0.85	0.75
B	2.56	2.52



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body	<b>BRASS</b>	<b>GOLD</b>
Center contact	<b>BERYLLIUM COPPER</b>	<b>GOLD</b>
Outer contact		
Insulator	<b>PTFE</b>	
Gasket		
Others parts		
-	-	-
-	-	-

PAGE 2/2	ISSUE <b>1422A</b>	SERIES <b>ECO MMCX</b>	<b>PART NUMBER R110A426000</b>
----------	--------------------	------------------------	--------------------------------

**PACKAGING**

Standard	Unit	Other
<b>100</b>	<b>Contact us</b>	<b>Contact us</b>

**ELECTRICAL CHARACTERISTICS**

Impedance		<b>50</b>	Ω	
Frequency		<b>0-3</b>	GHz	
VSWR	<b>1.35*</b> +	<b>0</b>	x F(GHz) Maxi	
Insertion loss		<b>0.15*</b>	√F(GHz) dB Maxi	
RF leakage	- (	<b>NA</b>	- F(GHz) dB Maxi	
Voltage rating		<b>170</b>	Veff Maxi	
Dielectric withstanding voltage		<b>250</b>	Veff mini	
Insulation resistance		<b>1000</b>	MΩ mini	

**MECHANICAL CHARACTERISTICS**

Center contact retention				
Axial force – Mating End		<b>10</b>	N mini	
Axial force – Opposite end		<b>10</b>	N mini	
Torque		<b>NA</b>	N.cm mini	
Recommended torque				
Mating		<b>NA</b>	N.cm	
Panel nut		<b>NA</b>	N.cm	
Mating life		<b>100</b>	Cycles mini	
Weight		<b>0.27</b>	g	

**ENVIRONMENTAL**

Operating temperature	<b>-40/+85</b>	°C	
Hermetic seal	<b>NA</b>	Atm.cm3/s	
Panel leakage	<b>NA</b>		

**SPECIFICATION**

**OTHER CHARACTERISTICS**

Assembly instruction:

Others:

**\*COAXIAL TRANSMISSION LINE ONLY**