

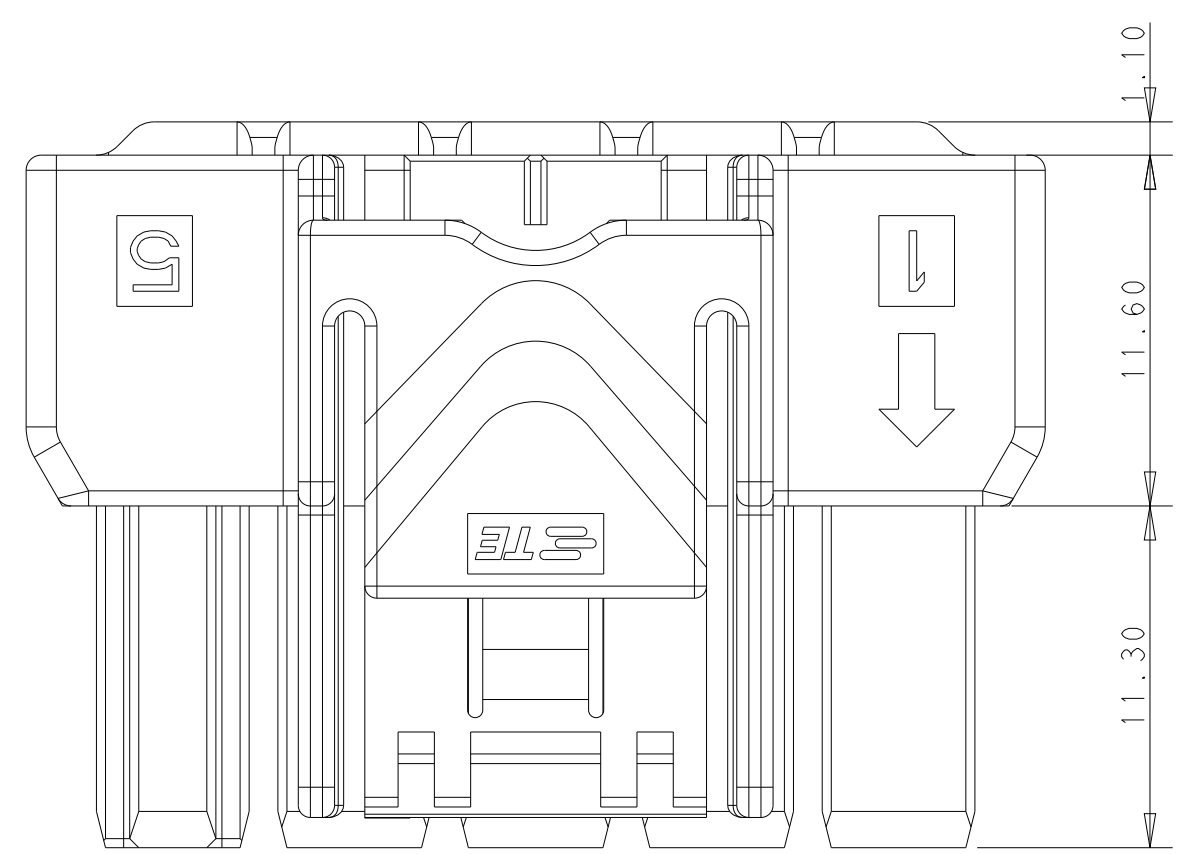
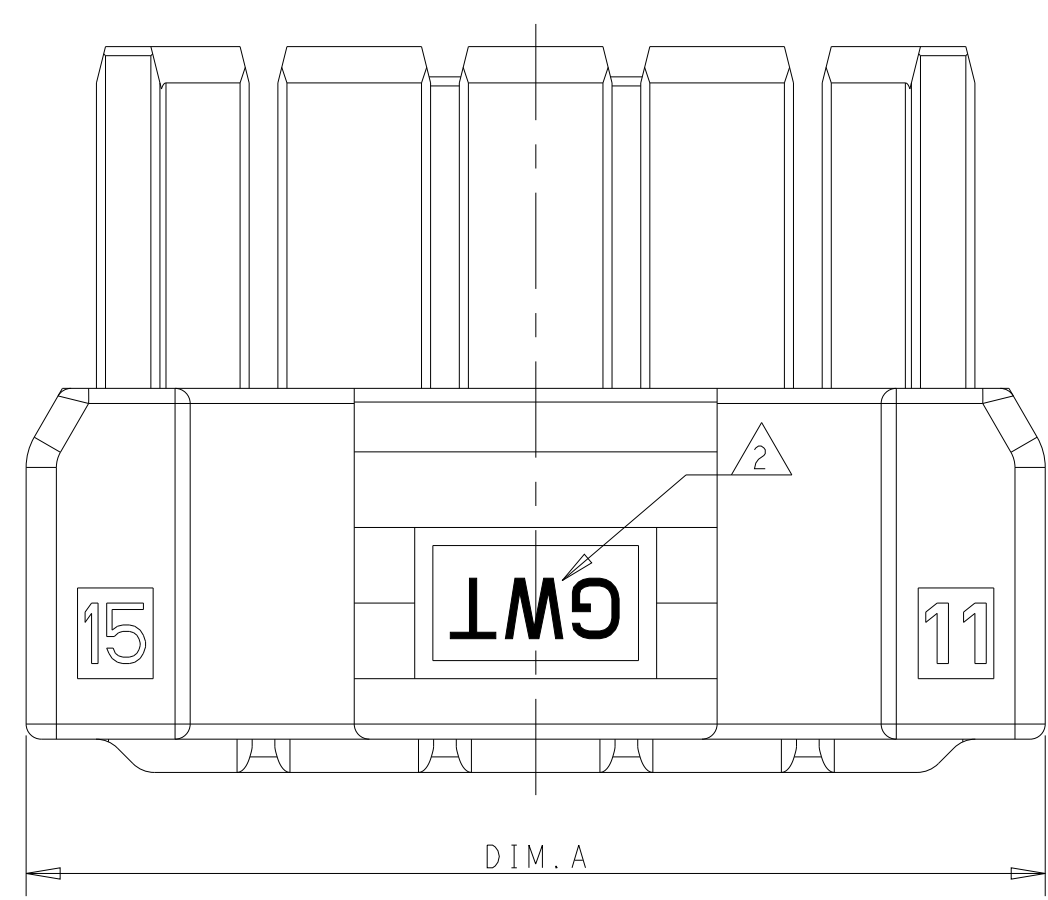
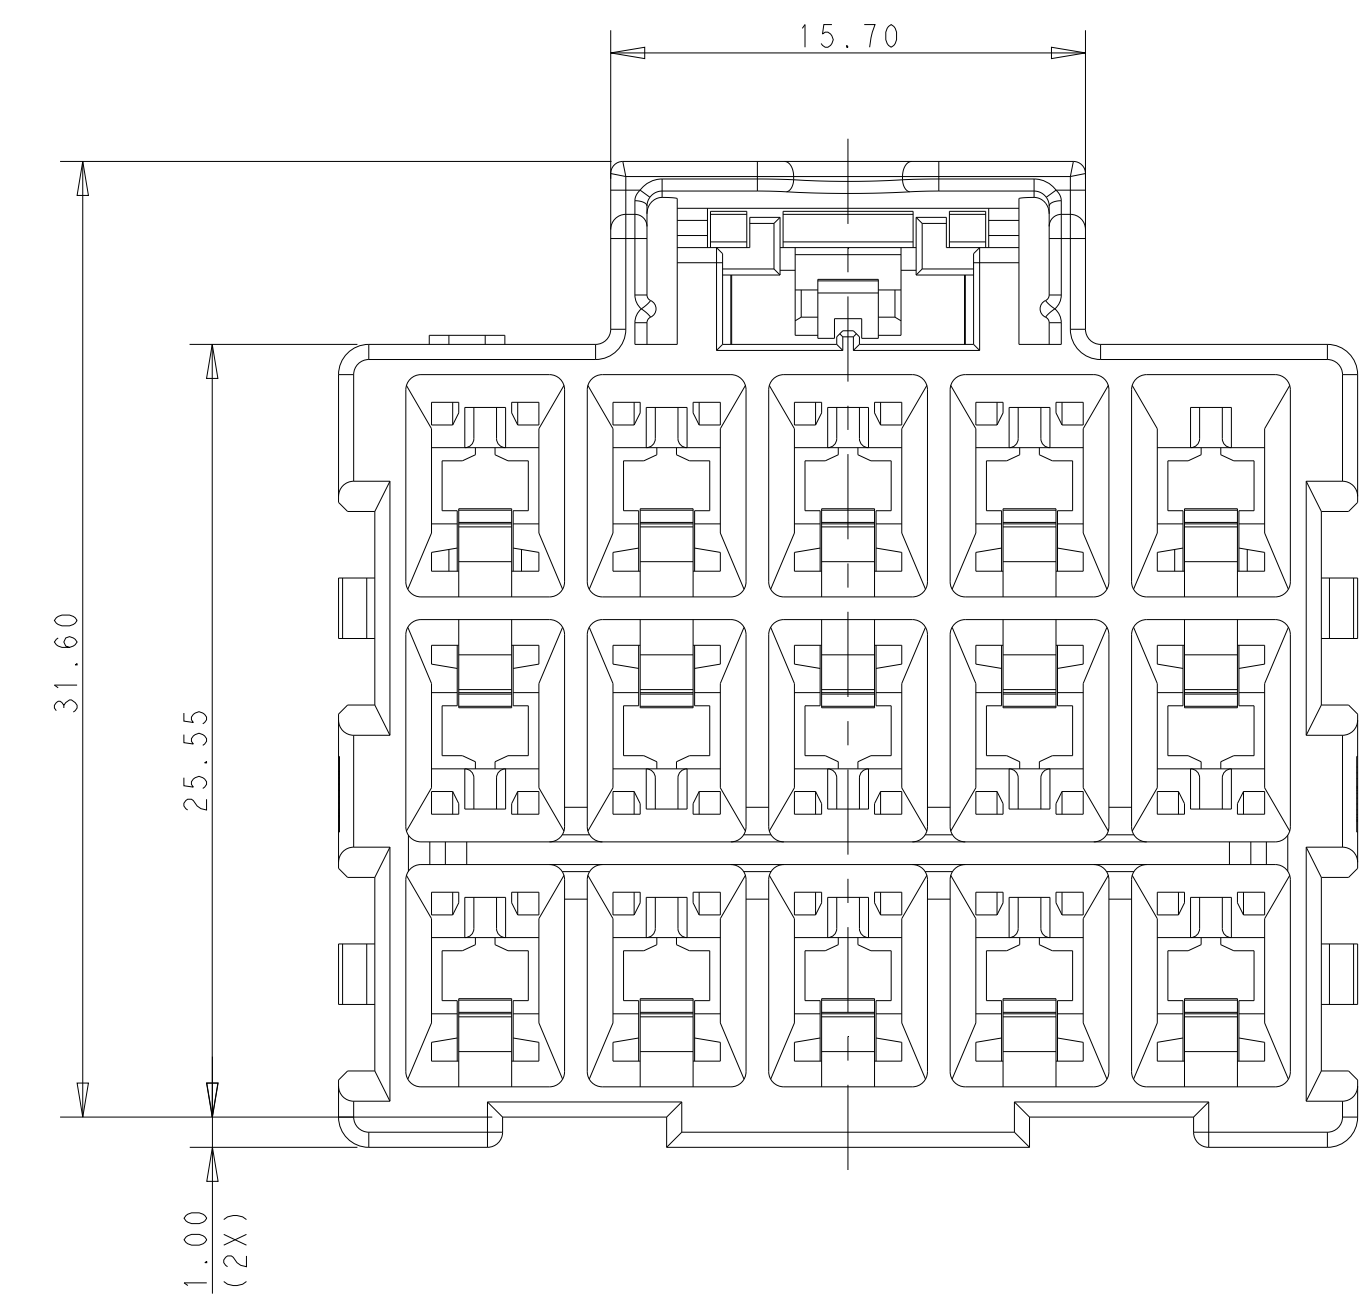


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD		
C		REVISED PER ECR-21-100678	08APR2021	SS	VS		
D		REVISED PER ECR-23-219171	29JUN2023	MC	DS		

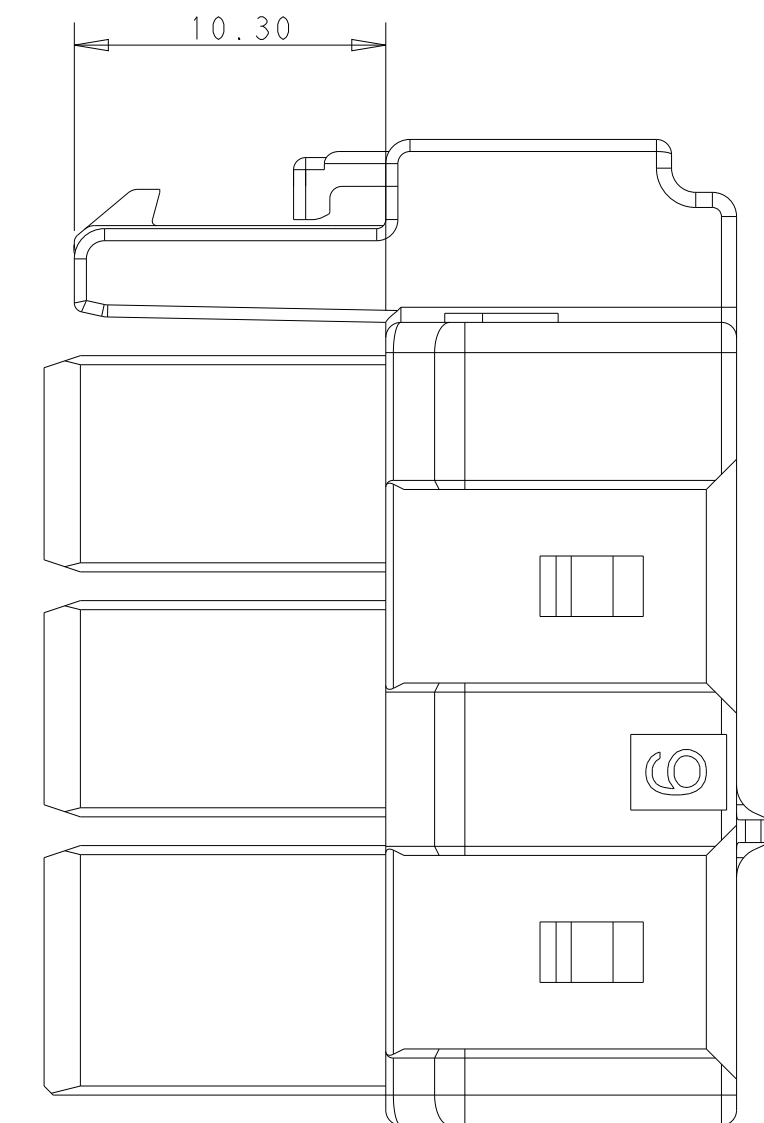







POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

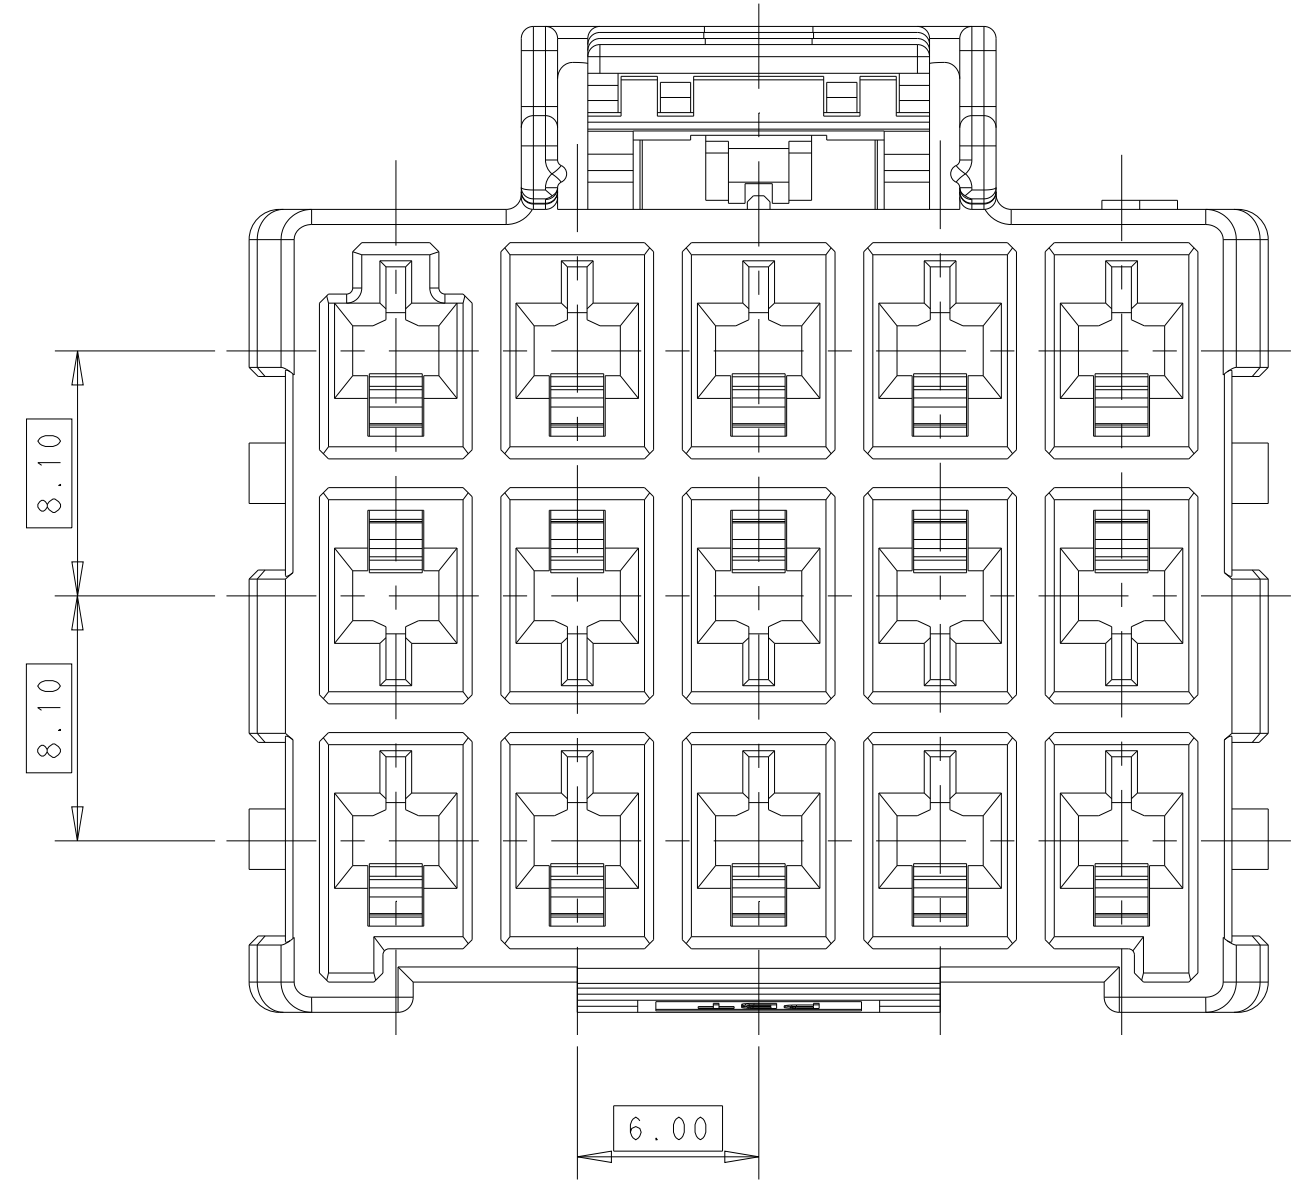

- △ MATERIAL:  
 LEVEL A: PA66, COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT), UL 94V-0  
 LEVEL B: PBT, HOT WIRE IGNITION (HWI) VERSION ARE MOLDED IN A RESIN THAT COMPLIES WITH TE HOT WIRE IGNITION TEST 109-32026 AND ARE RECOMMENDED FOR USE WITH HWI HOUSINGS THAT ALSO COMPLY, UL 94V-0
- △ MATERIAL MARK:  
 LEVEL A: GWT, LEVEL B: HWT
3. APPLICABLE CONTACT P/N  
 RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-\*; 2238066-\*
4. MATING CONN. P/N  
 CAP HSG: \*-2232356/60-\*  
 DOUBLE ROW TPA: \*-1971778-\*; SINGLE ROW TPA: \*-1971777-\*

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: TOMMY_WU 26MAR2013	TE Connectivity NAME: PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK
DIMENSIONS:		CHK: HAPYE_WU 26MAR2013	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: YUZHONG_MAO 26MAR2013	
mm	0 PLC ±	PRODUCT SPEC	SIZE: 108-106118
	1 PLC ±0.35	APPLICATION SPEC	SCALE: 3:1
	2 PLC ±0.25		SHEET 1 OF 2
	3 PLC ±		REV D
	4 PLC ±		
	ANGLES ±		
MATERIAL	FINISH	WEIGHT	
△	-	-	
Customer Drawing		114-106118	

LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	OWN	APVD		
-SEE SHEET 1-							

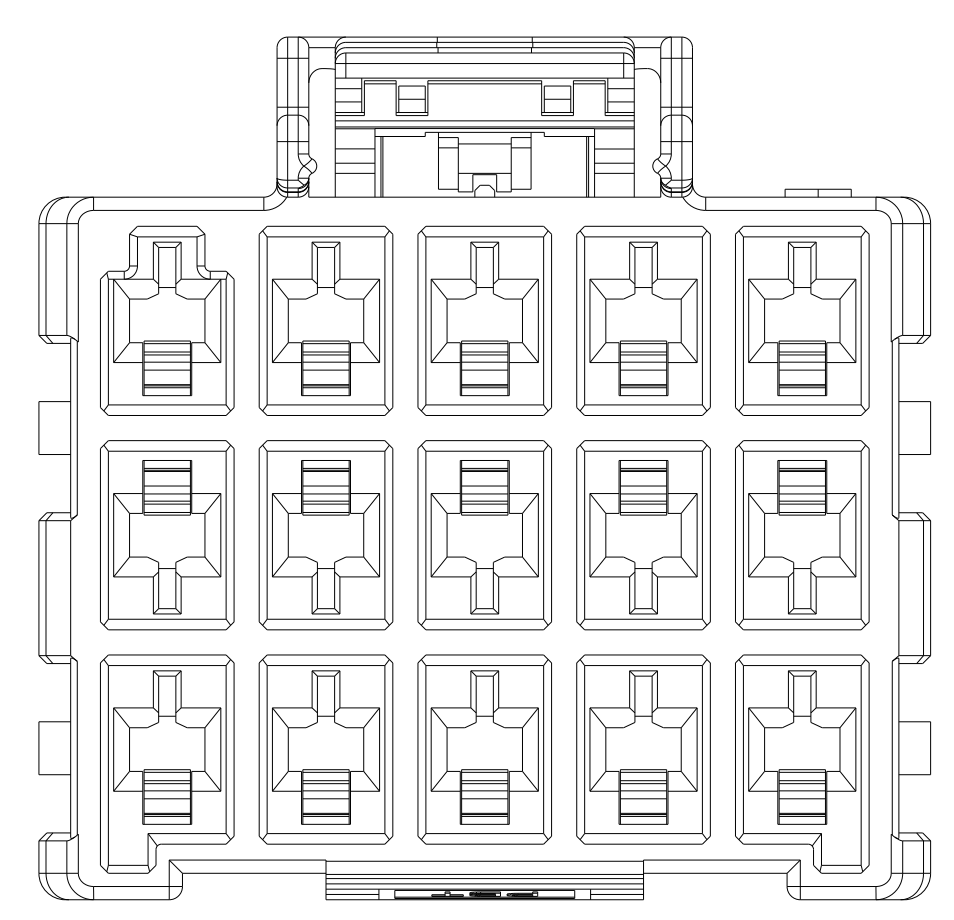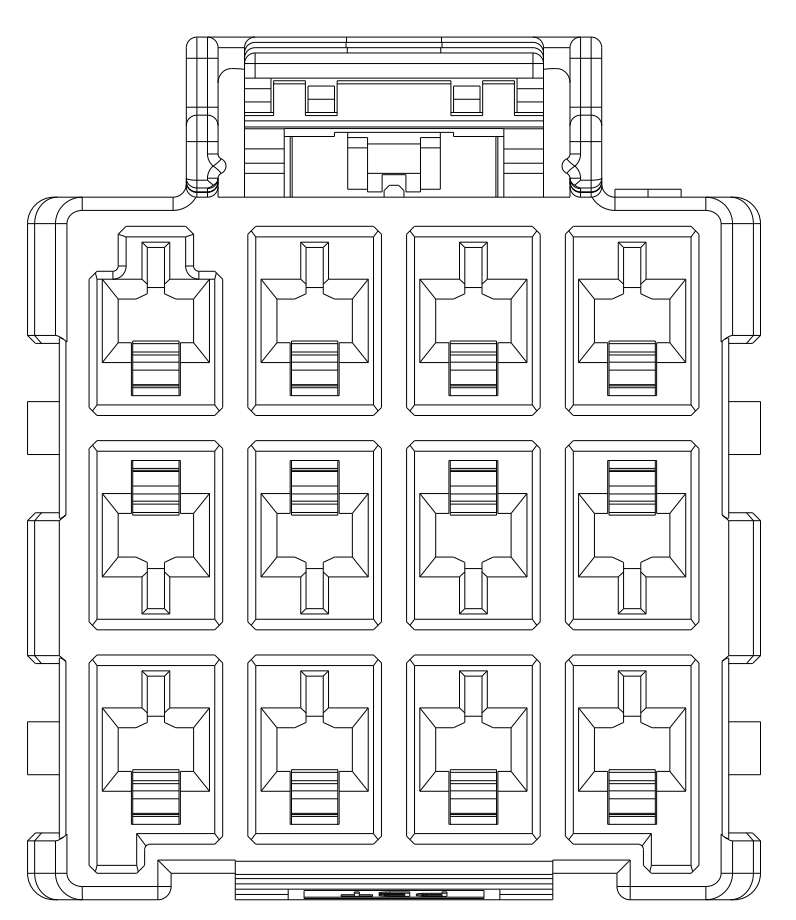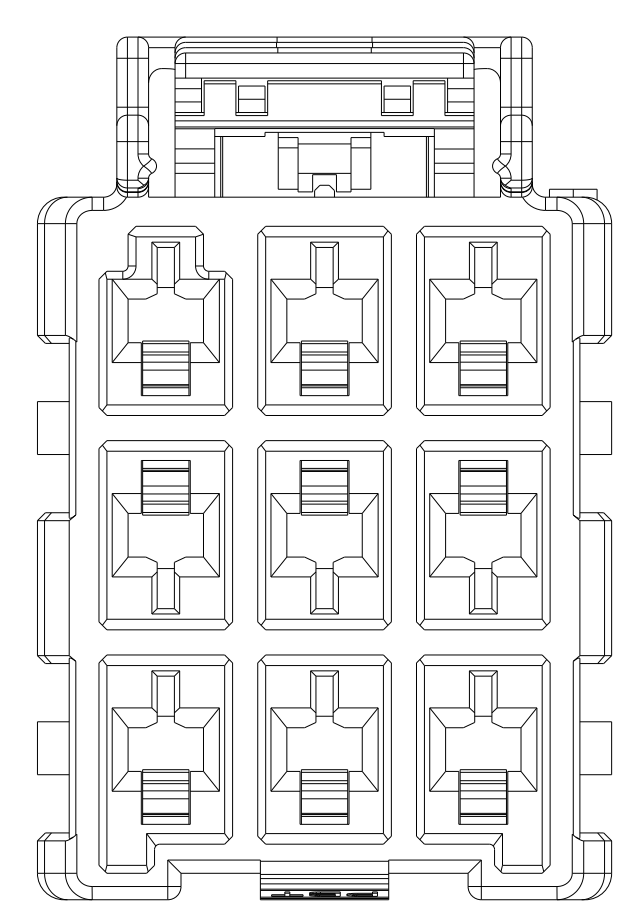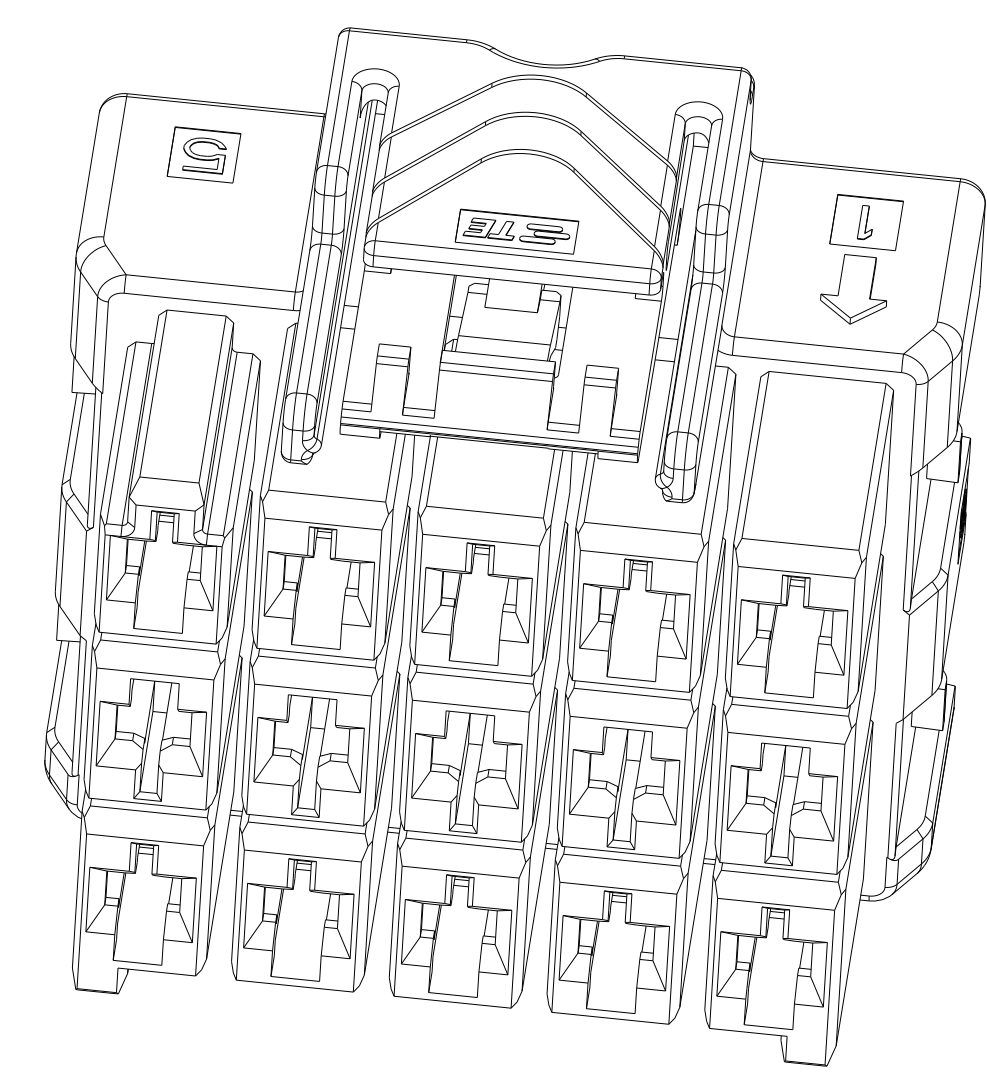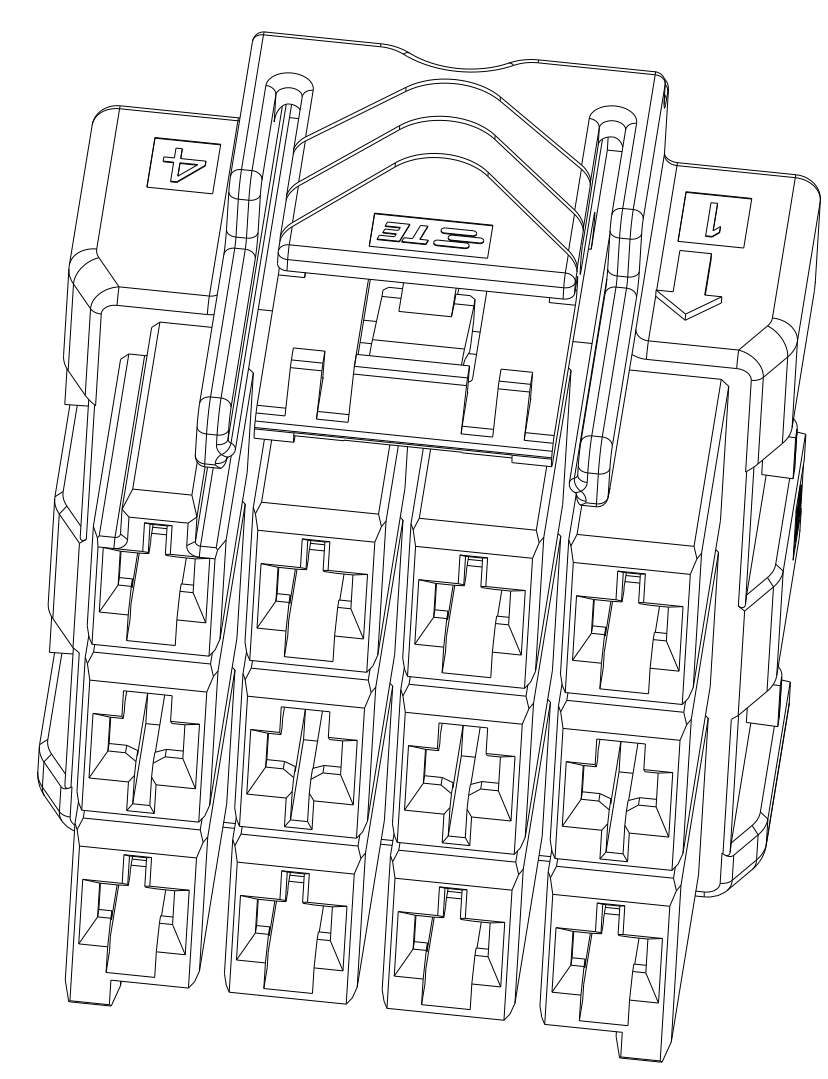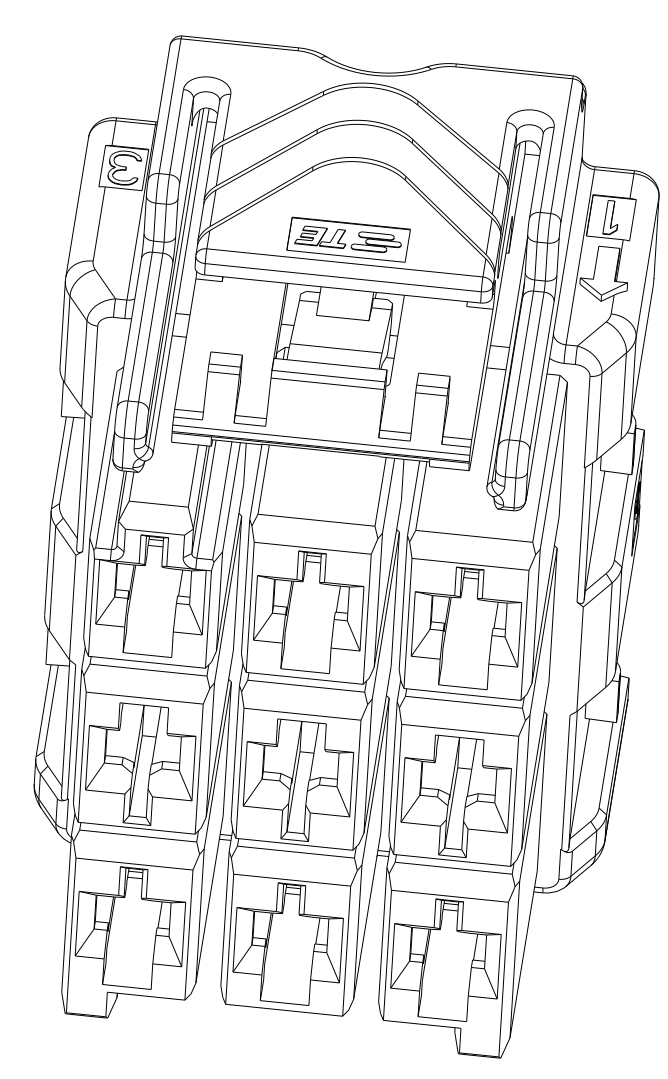


POS.	MATERIAL	COLOR	KEY	P/N
3*5	LEVEL A	DARK GREY	KEY A	5-2232357-7
		BROWN	KEY B	6-2232357-7
		GREEN	KEY C	7-2232357-7
		ORANGE	KEY D	8-2232357-7
3*4	LEVEL B	BLACK	KEY A	1-2232357-5
		DARK GREY	KEY A	5-2232357-4
		BROWN	KEY B	6-2232357-4
		GREEN	KEY C	7-2232357-4
3*3	LEVEL A	ORANGE	KEY D	8-2232357-4
		BLACK	KEY A	1-2232357-4
		DARK GREY	KEY A	5-2232357-3
		BROWN	KEY B	6-2232357-3
3*3	LEVEL A	GREEN	KEY C	7-2232357-3
		ORANGE	KEY D	8-2232357-3
		BLACK	KEY A	1-2232357-6


3\*3 POSITIONS

3\*4 POSITIONS


3\*5 POSITIONS

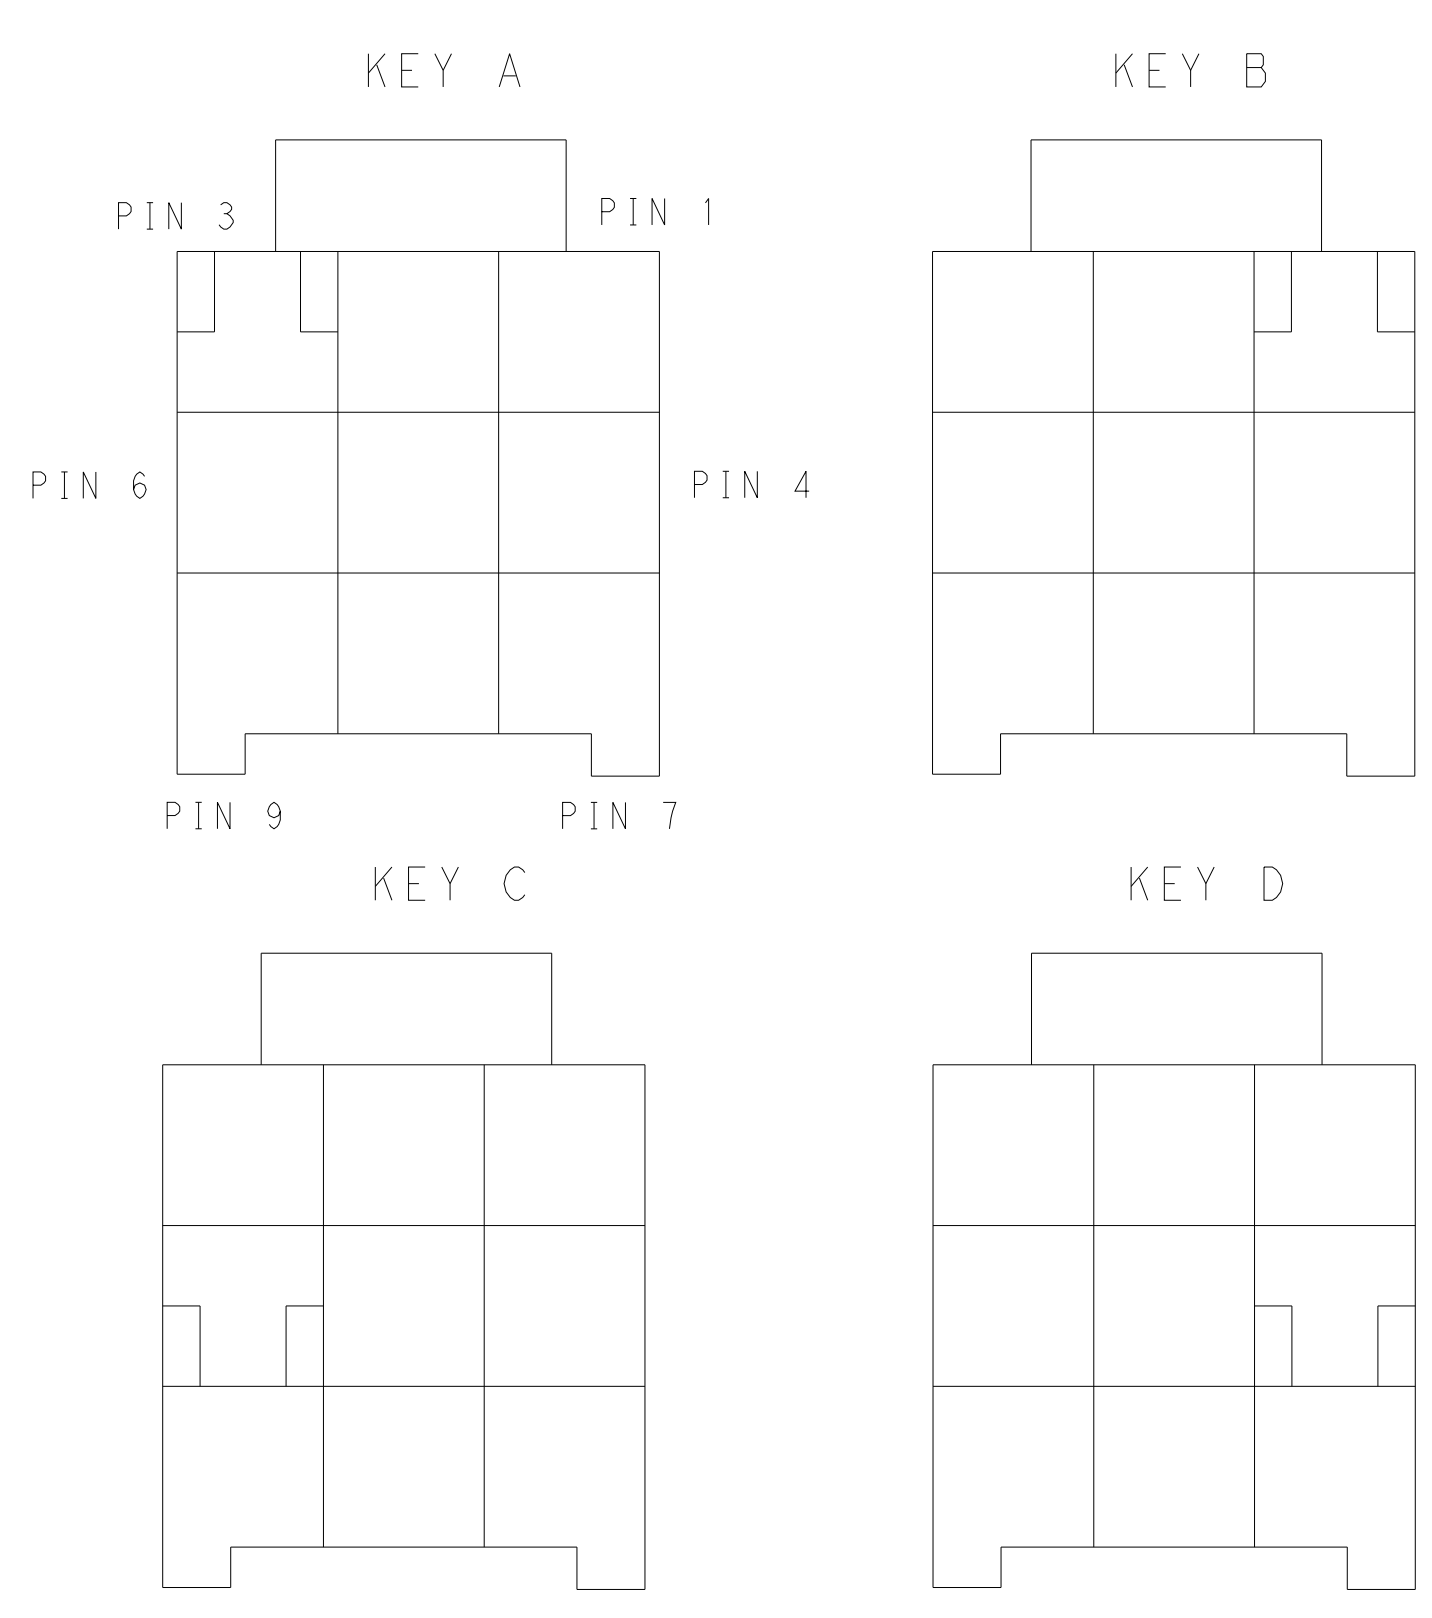

KEYING FOR 3\*3 POS.

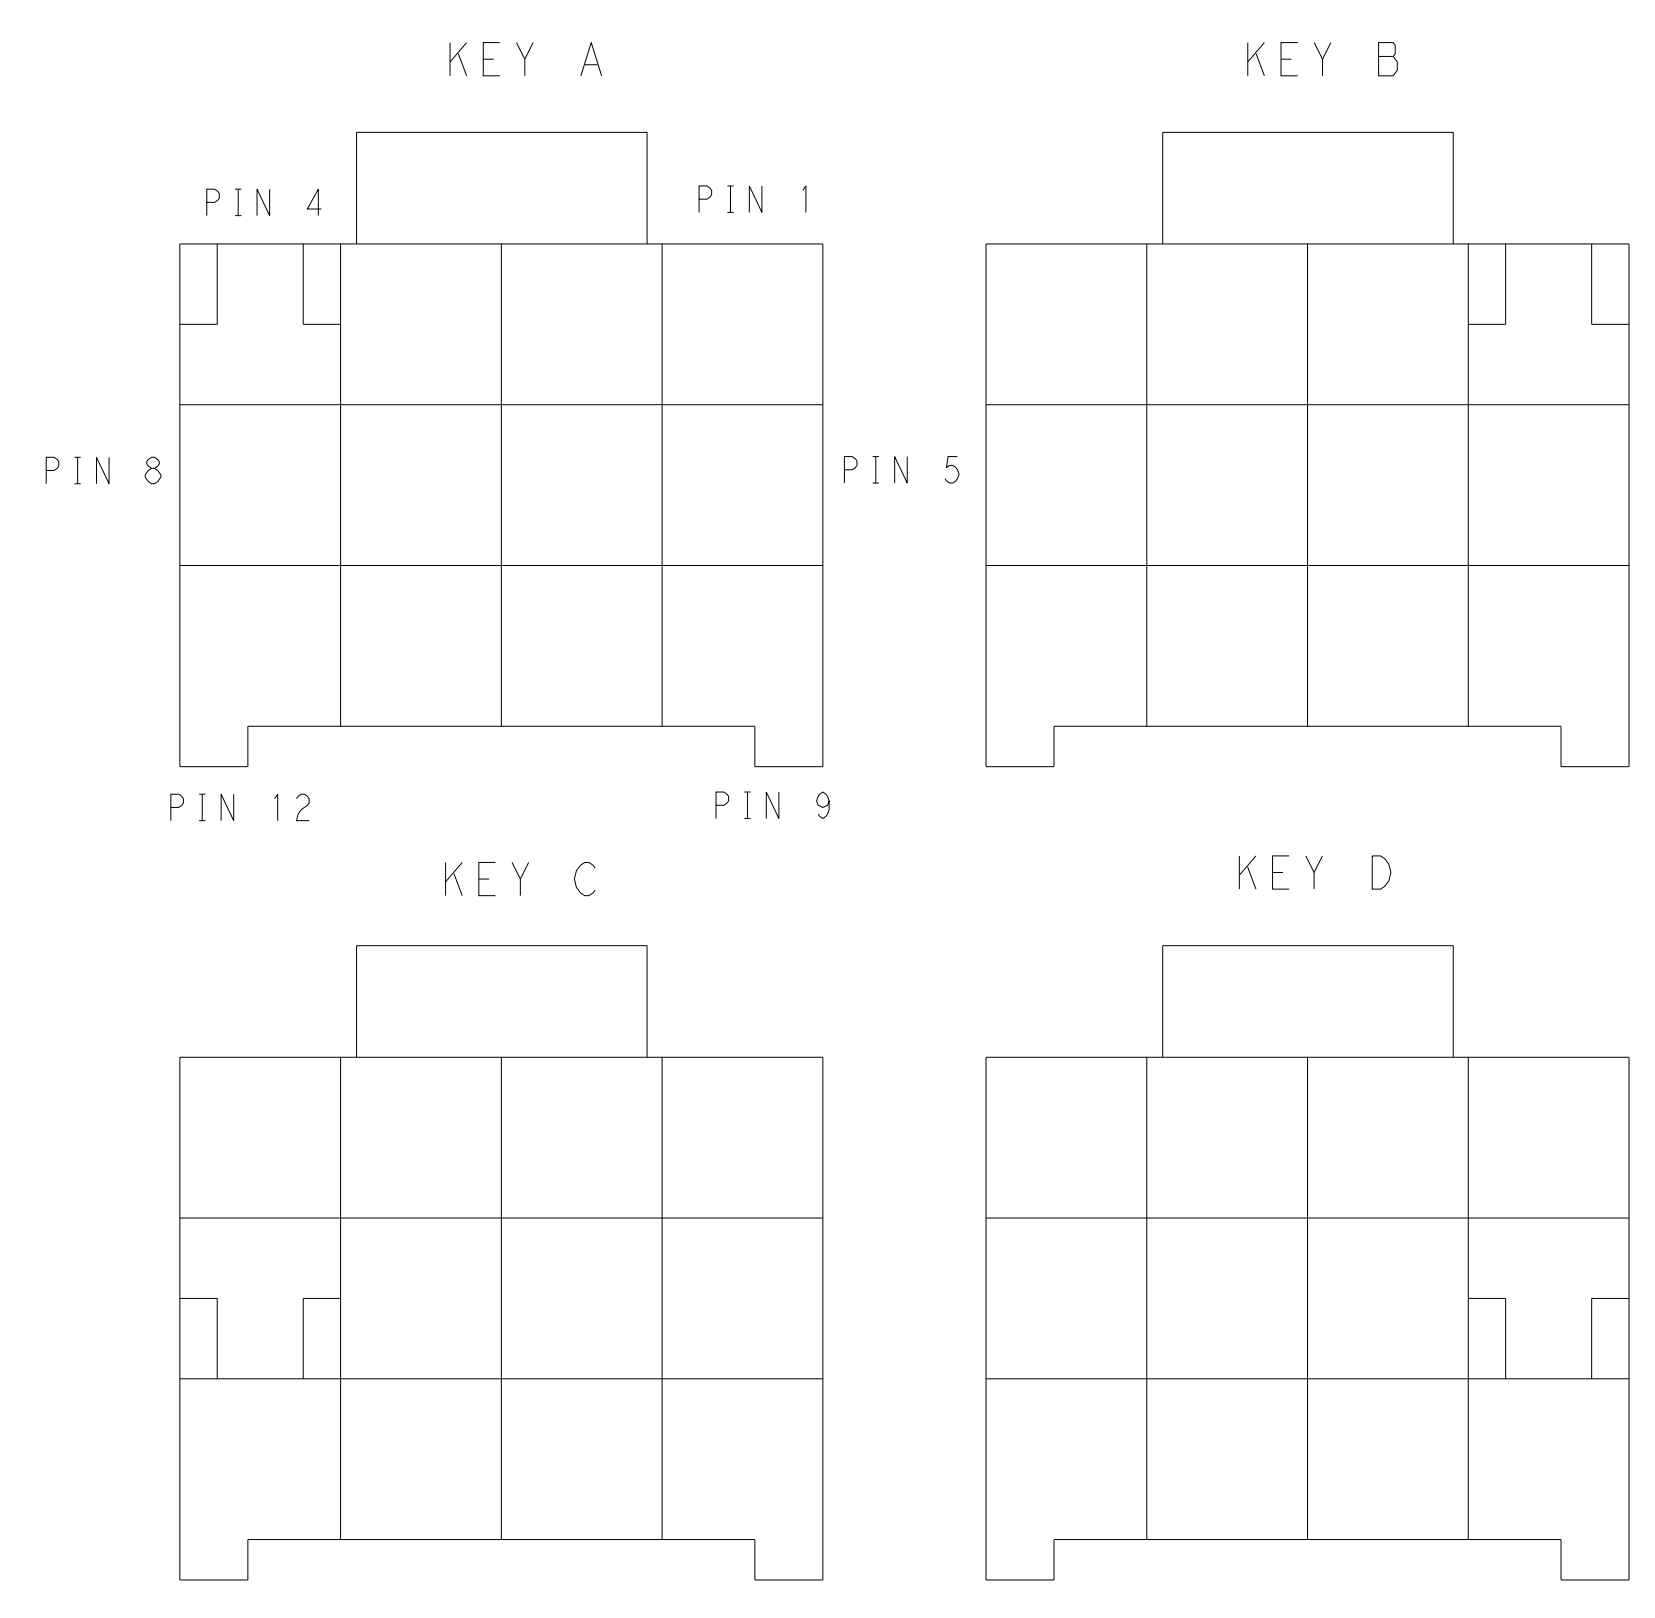

KEYING FOR 3\*4 POS.

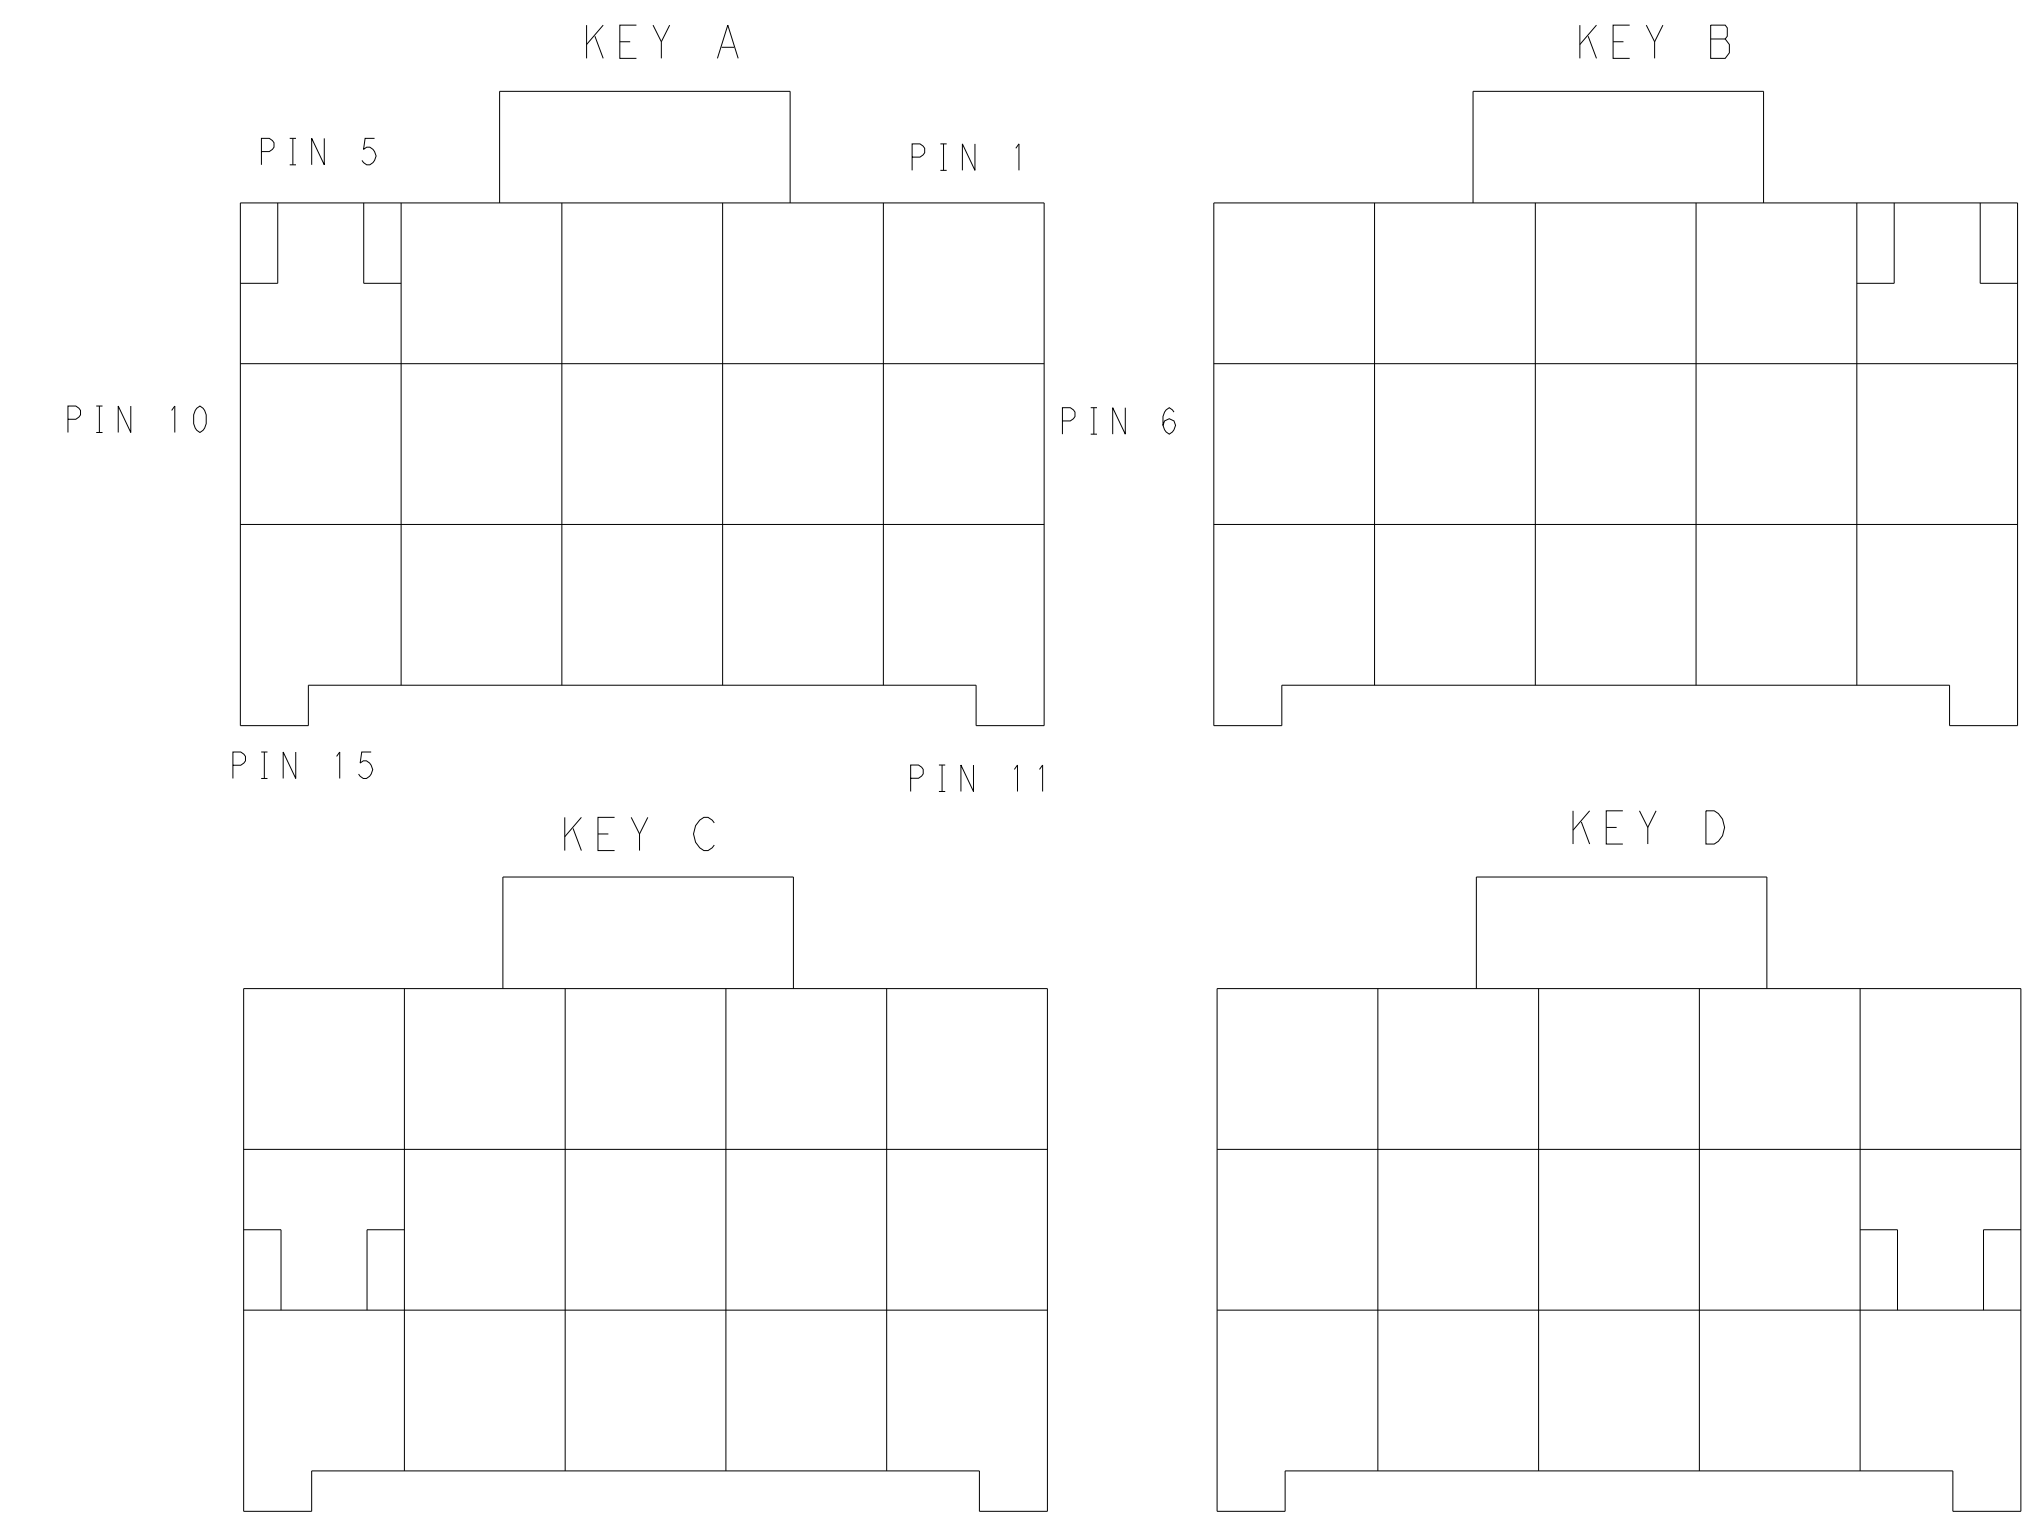

KEYING FOR 3\*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN	TOMMY_WU	26MAR2013
CHK	HAPYE_WU	26MAR2013
APVD	YUHONG_MAO	26MAR2013

TE Connectivity

PLUG HOUSING, TRIPLE ROW  
POWER TRIPLE LOCK

108-106118

114-106118

Customer Drawing

SCALE: 1:1

SHEET 2 OF 2

REV D