
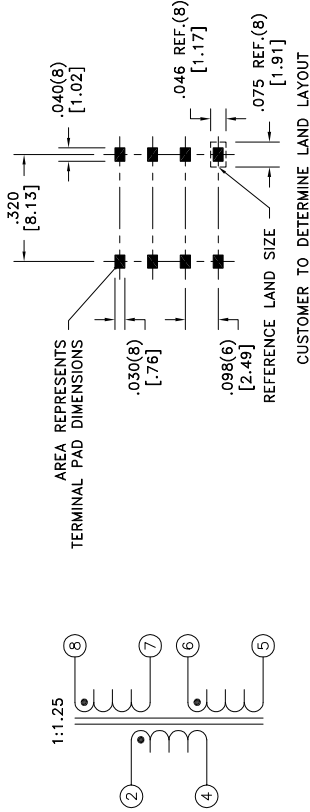


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes

* DIMENSION MAY BE EXCEEDED WITH SOLDER ONLY

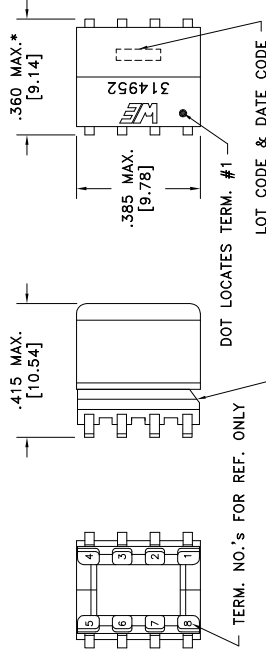

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

PARAMETER	TEST CONDITIONS	VALUE
D.C. RESISTANCE	2-4 @20°C	1.50 ohms max.
D.C. RESISTANCE	8-5 tie(7+6), @20°C	1.80 ohms max.
INDUCTANCE	2-4 10kHz, 100mVAC, I_s	2.5mH $\pm 30\%$
DIELECTRIC	2-8 tie(7+6), 2500VAC, 1 second	2000VAC, 1 minute
TURNS RATIO	(8-5):(2-4), tie(7+6)	1.25:1, $\pm 2\%$

GENERAL SPECIFICATIONS:
 OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.
 CURRENT RATING: 150mA Arms

Wire insulation & RoHS status not affected by wire color.
 Wire insulation color may vary depending on availability.



REV.	DATE	Packaging Specifications Method: Tape & Reel PKG-0410 www.wuelectronic.com/midcom	CONVENTION PLACEMENT	Tolerances unless otherwise specified: Angles: $\pm 1^\circ$ Decimals: $\pm .005$ [1.3] Fractions: $\pm 1/64$ Footprint: $\pm .005$ [1.3] This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	DRAWING TITLE TRANSFORMER	PART NO. 750314952
6A	5/15	SEE REVISION SHEET FOR REVISION LEVEL				SPECIFICATION SHEET 1 OF 1