

CUSTOMER PRINT


PART NUMBER: CA6C806SPXXX90

NOTES:

1. FINISHED PRODUCT TO BE COILED
2. OVERMOLD BOOT MATERIAL: UV PBT, BLACK
3. ELECTRICAL TEST: 100% CONTINUITY
4. ALL DIMENSIONS ARE REFERENCE EXCEPT THOSE WITH A TOLERANCE

ASS'Y P/N	"X" DIM
CA6C806SP03990	3 FT. 3 1/2 IN. ±2 IN. [1M ±50.8mm]
CA6C806SP07990	6 FT. 7 IN. ±2 IN. [2M ±50.8mm]
CA6C806SP19790	16 FT. 5 IN. ±4 IN. [5M ±101.6mm]
CA6C806SP39490	32 FT. 9 3/4 IN. ±8 IN. [10M ±203.2mm]
CA6C806SPXXX90	



CABLE LENGTH IN "INCHES"



END "A"
FACE VIEW

O-RING
MAT'L: SILICONE, RED

STRAIGHT OVERMOLDED
CABLE CONNECTOR, FEMALE
MAT'L: UV PBT, BLACK
(2) #16 SOCKET CONTACTS
(4) #20 SOCKET CONTACTS
MAT'L: GOLD PLATED COPPER ALLOY

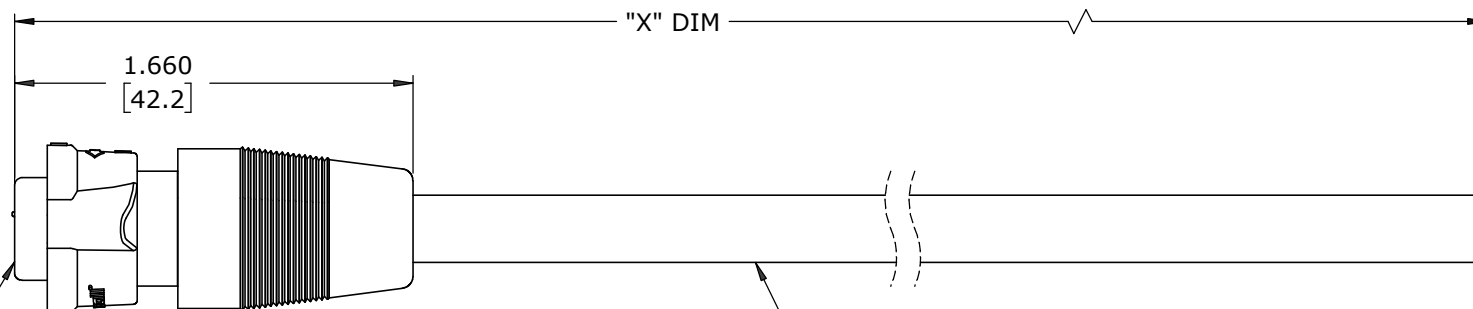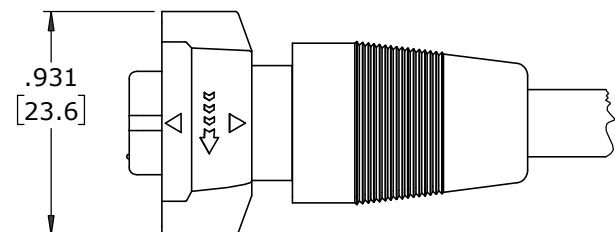

COUPLING RING
MAT'L: UV PBT, BLACK
SPRING
MAT'L: STAINLESS STEEL

CABLE
(2) 16 AWG CONDUCTORS
(4) 20 AWG CONDUCTORS
JACKET: PRESSURED PVC, BLACK
Ø .280 O.D. NOM.
300 VOLTS

BLUNT CUT

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS UNLESS INDICATED

WIRE COLOR CODE					
POS. 1	POS. 2	POS. 3	POS. 4	POS. 5	POS. 6
BLK	WHT	RED	BLU	GRN	YEL
16 AWG	16 AWG	20 AWG	20 AWG	20 AWG	20 AWG

CUSTOMER APPROVAL

THIS DOCUMENT CONTAINS CONFIDENTIAL INFORMATION PROPRIETARY TO CONXALL CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT /INFORMATION IS EXPRESSLY PROHIBITED UNLESS AUTHORIZED IN WRITING BY CONXALL CORPORATION.

APPROVED BY: _____
DATE: _____

RoHS COMPLIANT

A	MA	08-17-21	DRAWING CREATED PER DOR 21-109361DS-1		
REV.	INIT.	DATE	DESCRIPTION		
	MA	08-17-21	ORIG. DRAWN BY: MA DATE: 08-17-21 CHECKED BY: _____ APPROVED BY: _____ TITLE: CABLE ASSEMBLY 2#16/4#20 SKT CONTACTS INSTA-CLICK™ MINI-CON-X MIX SIG BULLET CUSTOMER: STANDARD PRODUCT		
ALL INFORMATION ILLUSTRATED IS THE PROPERTY OF "CONXALL CORPORATION". UNAUTHORIZED DUPLICATION OR DISTRIBUTION OF THIS DOCUMENT IS PROHIBITED.			601 E. WILDWOOD VILLA PARK, IL 60181		
ALL UNITS ARE IN FEET, INCHES, FRACTION OF INCHES AND DECIMALS.			SCALE	SIZE	SHEET
			NTS	B	1 OF 1
FILE:	DIRECTORY:	PART NUMBER:	REV		
CA6C806SPXXX90	SLW	CA6C806SPXXX90	A		