


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

LTR	DESCRIPTION	DATE	BY
-	Released	9/1/94	JP
B	Updated	8/22/07	JCL

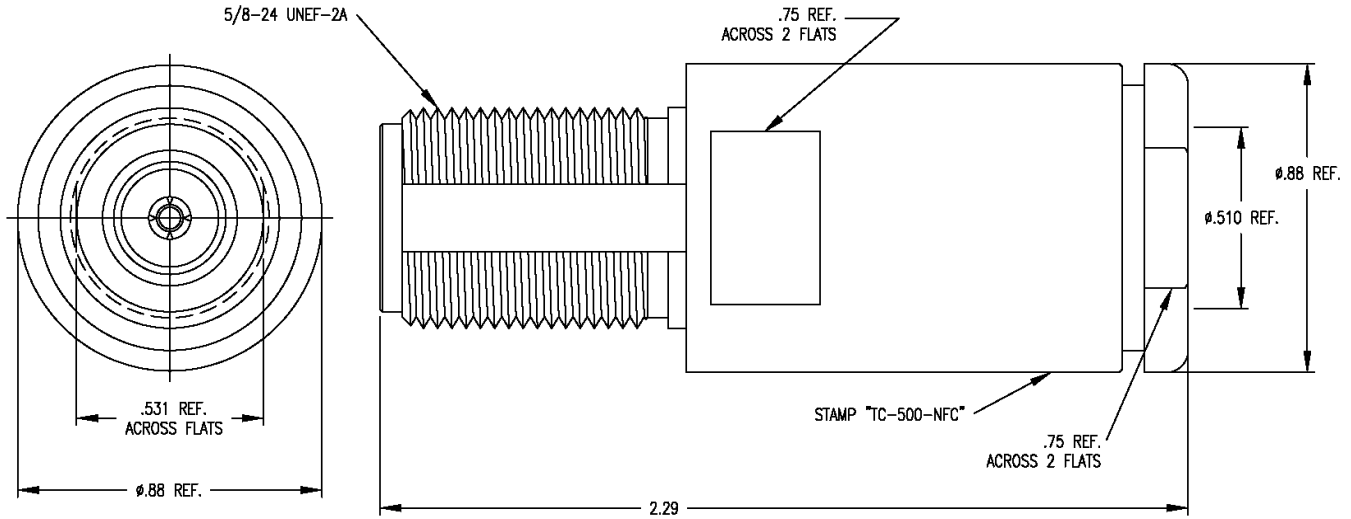

I. MATERIALS & FINISHES

center contact: Gold Plated Beryllium Copper
 outer contact: Alballoy Plated Brass
 body: Alballoy Plated Brass
 dielectric: Teflon® PTFE
 gasket: Silicone Rubber
 shrink sleeve: Adhesive Lined Polyolefin
 attachment: braid clamp

II. ELECTRICAL PROPERTIES

impedance: 50 ohms
 working voltage: 1000 vrms (max)
 vswr: 1.25:1 (max) up to 2.5 GHz
 insertion loss: 0.10 x √Fghz

Unless otherwise specified, dimensions are in inches. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

Approvals		
Drawn	JP	9/1/94

TIMES MICROWAVE SYSTEMS
 Wallingford, CT 06492
 (203) 949-8400; (203) 949-8423.Fax
 www.timesmicrowave.com

TC-500-NFC
 Type-N female (jack)
 for 500 Series Cables

Size A	CAGE CODE 68999	Drawing No.: 3190-215
--------	---------------------------	---------------------------------

Scale: NA	Rev. (B)	Sheet: 1 of 1
-----------	----------	---------------