

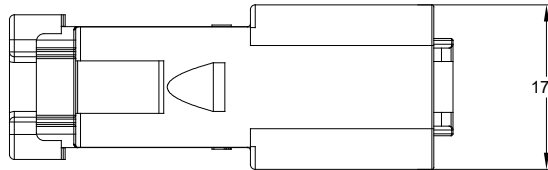


REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A1	-	RELEASE NEW DRAWING	11MAY18	ROOKIE	TOMMY
A2	-	REVISED DESCRIPTION	12JUN19	JAH	DH



NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL:
HOUSING: THERMOPLASTIC, BLACK
SEAL: SILICONE RUBBER
CONTACT: COPPER ALLOY
2. MODIFICATIONS: BLACK, 2 PIN BUSBAR WITH NICKEL PLATED
3. SPECIFICATIONS:
 - 3.1 CURRENT RATING: 13 AMPS MAXIMUM FOR THE 2 PIN BUSBAR
 - 3.2 OPERATING TEMPERATURE: -55°C TO +125°C.
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2 MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.
 - 3.4 INSULATION RESISTANCE: 1000 MEGOHM MIN @ 25°C.
 - 3.5 MOISTURE RESISTANCE: IP67 (MATED CONDITION).
 - 3.6 MATING CYCLE DURABILITY: 100 CYCLES
 - 3.7 RoHS COMPLIANT
4. MATING PART: AT06-2S* PLUG
(* = AVAILABLE MODIFICATIONS)
6. ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

AT04-2P-P060		REF: DT04-2P-P060	
QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED: 1) All dimensions are in metric (mm). 2) Tolerances are as follows: 1 PL DEC ±0.30 2 PL DEC ±0.15 3 PL DEC ±0.08 Fractions ±1/64 Angles ±1°		SIGNATURES DATE	
3) Note reference =		DRAWN: ROOKIE 11MAY18	
MATERIAL SPECIFICATIONS:		CHECKED: ORION 11MAY18	
PROCESS SPECIFICATIONS:		ENGINEER:	
NEXT ASSY:		APPROVAL: TOMMY 11MAY18	
		CUSTOMER:	
		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
		SINE Systems Corporation A Subsidiary of Amphenol Corporation 44724 Morley Drive Clinton Township, MI 48036	
		HYPERBUSS AT 2WAY RECEPTACLE 2 PIN BUSBAR NICKEL-PLATED, BLACK	
		SIZE: B SCALE: NONE	DWG NO: AT04-2P-P060 REVISION: A2
		SHEET 1 OF 1	

TITLE: HYPERBUSS AT 2WAY RECP 2 PIN BUSBAR NICKEL-PLATED, BLACK
DWG NO: AT04-2P-P060
REV: A2
SH: 1
OF: 1