




Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

FCI

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

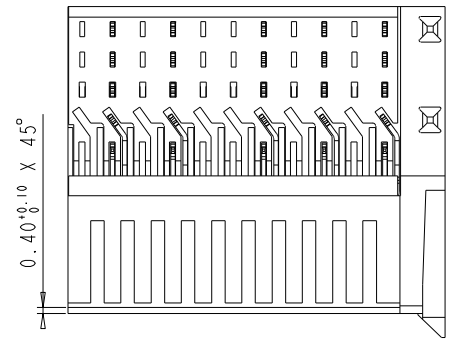


☐ EMPTY CAVITY
 ◼ CAVITY LOADED WITH CONTACT

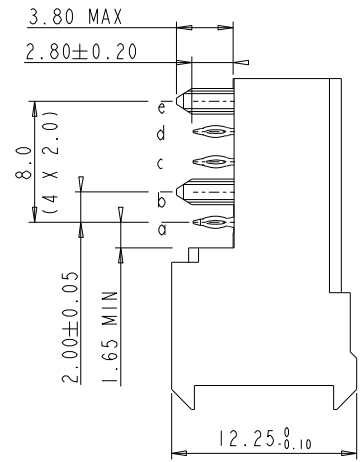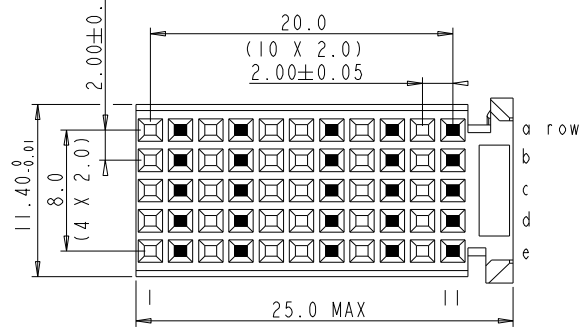

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE : 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE : 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN/CONT
 INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES
1. " " LEAD FREE INDICATOR : LF=LEAD FREE
 " " PERFORMANCE LEVEL INDICATOR (REF DWG NO. BSC 201844.003)
 2. THIS PRODUCT IS CSA APPROVED.
 THIS PRODUCT IS UL RECOGNIZED.
 3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
 BS.A.201572.001
 4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
 OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

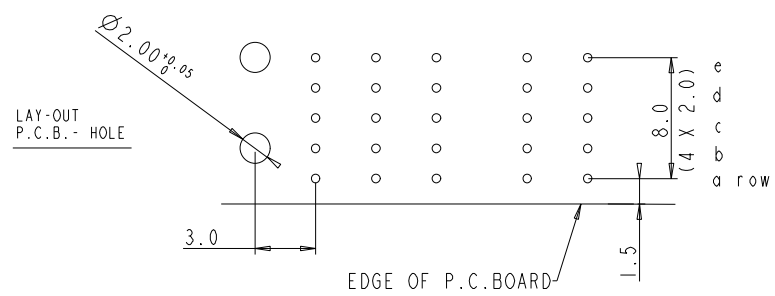

rev	ecn no	dr	date
A	CONVERSION REVISION 02	KN	14-09-01
B	DG05-0278	Kason	02-08-05
-	-	-	-
-	-	-	-
-	-	-	-

Material		Spec ref	
Mat code		tolerance	projection
Heatreat		IDE C ± 0.2 IDE C 2DEC ± 0.1 2DEC ANGLES ± 1° HOEKEN	MM
Plating/Finish		size A4	Scale 2.000
Dr M.Fret	09-03-98	Product family MILLIPACS	ECN DG05-0278
Eng		Model Name	REL Level
Chr		Model Revision	
Appr			
		title MPACS 5+2R RA RCP CONN TYPE C	dwg no BSC202468005
Pro/E file	catalog	PDM: Rev-B STATUS: Released HM2P03PACA20 - - - - - CUSTOMER DRAWING	Rev. B sheet 1 of 1