


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2021-08-27	Allen Pan	Rev.02 To Rev.A

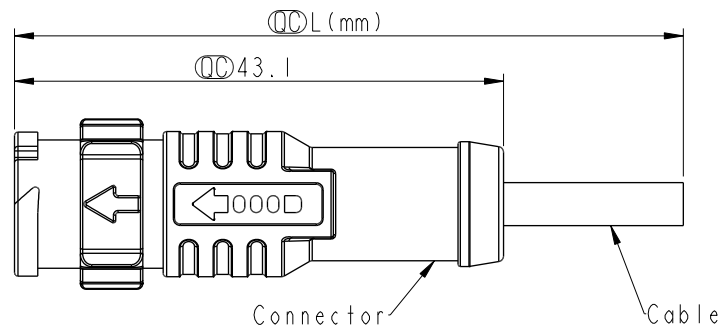

AD-XXBMMM-QL8PXX


XX: No. Of Pin

XX: 01~15Meters  
 01: 01Meter  
 02: 02Meters  
 ...  
 15: 15Meters

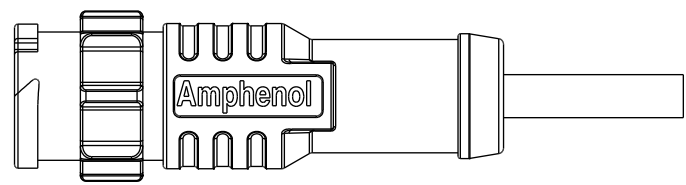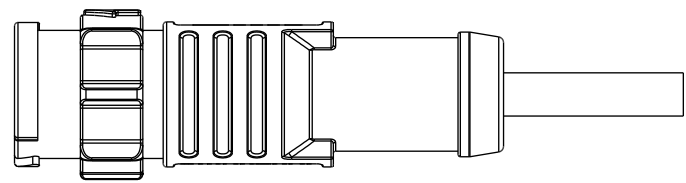

Note:

- \* RoHS Compliant
- \*  $\varnothing$  Important Dimension
- \* Waterproof Rate: IPX8, Mated 1m/24h
- \* Connector
  - Housing: Thermoplastic, Black
  - Pin: Copper Alloy, Gold Plated
  - Outer Mold: Thermoplastic, Black
- \* Cable: IEC61156-12, 26#\*IP+AL/MY+B, OD=3.8mm, PUR Jacket, Green
- \* Cable Length Tolerance:
  - 1M < L ≤ 3M: +50/-0 mm
  - 3M < L ≤ 5M: +100/-0 mm
  - 5M < L ≤ 10M: ±100 mm
  - 10M < L ≤ 15M: ±200 mm



2Pin

3	White	白
1	Blue	藍
Pin#	Wire	

Pin Assignments Front View

UNIT:mm

TOLERANCE

±0.5mm

TITLE X-Lok A-Size Molding M Conn M Pin			
SCALE 3:2	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. A.1	$\varnothing$ : Inspection item	

**Amphenol LTW**  
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Allen Pan	DATE 2021-08-27
DWG NO AD-XXBMMM-QL8PXX	CHECKED BY Sam Ho	DATE 2021-08-27
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2021-08-27