

D-SUB cable - VS-09-DSUB-20-LI-1,0 - 1656233

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled D-SUB cable, shielded, 9-pos., stranded (7-wire), cable color: RAL 7000 (gray), secured using 4-40 UNC thread, IP20 protection, head 1 with socket shell 1 and straight cable outlet, head 2 with pin shell 1 and straight cable outlet, length: 1 m



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	100.0 g
Custom tariff number	85444290
Country of origin	China

Technical data

Dimensions

Length of cable	1 m
-----------------	-----

Ambient conditions

Degree of protection	IP20
----------------------	------

General data

Number of positions	9
Signal type/category	Universal
Overvoltage category	III
Pollution degree	2

Characteristics head 1

Head type	Socket straight D-SUB 9
No. of positions (pin connector pattern)	9

Characteristics head 2

Head type	Plug straight D-SUB 9
-----------	-----------------------

D-SUB cable - VS-09-DSUB-20-LI-1,0 - 1656233

Technical data

Characteristics head 2

No. of positions (pin connector pattern)	9
--	---

Classifications

eCl@ss

eCl@ss 4.0	27060306
eCl@ss 4.1	27060306
eCl@ss 5.0	27061801
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27060390

ETIM

ETIM 2.0	EC000830
ETIM 3.0	EC001855
ETIM 4.0	EC001855
ETIM 5.0	EC001408

UNSPSC

UNSPSC 6.01	31261501
UNSPSC 7.0901	31261501
UNSPSC 11	31261501
UNSPSC 12.01	31261501
UNSPSC 13.2	31261501

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

D-SUB cable - VS-09-DSUB-20-LI-1,0 - 1656233


Approvals

Approval details


EAC

Drawings


Dimensional drawing

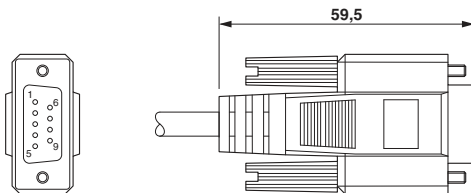


Dimensional drawing

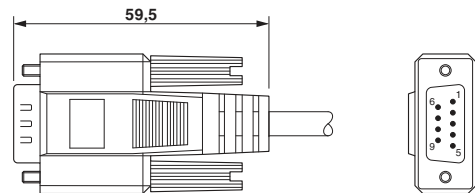

Circuit diagram

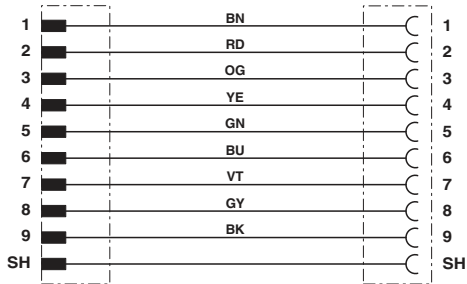

Schematic diagram



Schematic diagram

