




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

	D:	31.0	± max
	T:	10.0	± max
	Lead Diameter	1.0	± nom
	S:	7.8	± nom
	L:	38.0	± nom
	Coating Lead Run Down (straight Leads)	4.0	± max
	B:	7.80	± nom
	C:	6.70	± nom

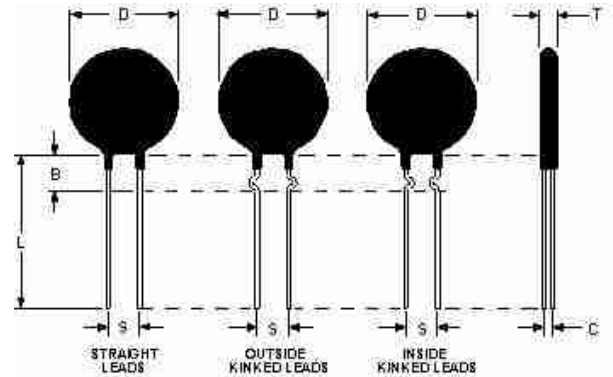

Electrical Specifications

	Resistance:	20.0 Ω	± 25 %
Max Steady State Current upto 65°C:	10.00	A	
Max Rec. Energy Rating:	250	J	
Actual Failure Instantaneous Energy:	500	J	
Maximum Capacitance @ 120 VAC:	17,000	µf	
Maximum Capacitance @ 240 VAC:	4,341	µf	
Maximum Capacitance @ 440 VAC:	1,003	µf	
Maximum Capacitance @ 680 VAC:	500	µf	
Resistance @ 100% Max Current:	0.00	Ω	
Resistance @ 50% Max Current:	0.64	Ω	
Body Temperature at 100% Max Current:	224.00	°c	
Dissipation Constant:	45.4	mw/°c	
Thermal Time Constant:	194	Sec.	
Material Type (for Beta and Curve):	I		

MS32 20010	
Date: 02/05/2009	Drawn by: Erin Landis
Ametherm, Inc. 961 Fairview Drive Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A