

# ABS601 Series

## 600 W AC-DC Power Supplies

### Sealed IP66/67/68

The ABS601 Series of AC-DC power supplies provides up to 600 W of regulated output power through a wide input voltage range 85 – 305 VAC in a single output of 24 VDC or 48 VDC.

The ABS601 Series comes in a 4.92 x 9.86 x 2.36 inch form factor with a full set of protection features.

The ABS601 Series is available in an aluminium extruded chassis having fins for an optimal heat dispersion via natural convection. The input / output connections are fixed to the chassis through water tight glands, which combined with the sealed enclosure, give the power supply an IP66/67/68 ingress protection grade.

The -SL option offers a 5 V<sub>DC</sub> stand-by output and a set of control signals: +/- remote sense, remote On/Off (-PS\_Inhibit), power good (PS\_Ok), I-share (ISHARE1+V\_SLOGIC).

The ABS601 Series complies with the latest international safety standards and displays the CE-Mark for the European Low Voltage Directive (LVD).



#### Key Features & Benefits

- Sealed enclosure, IP66/67/68 Ingress Protection grade
- High efficiency up to 94% (50% to 100% load)
- Low stand-by power consumption (< 0.35 W)
- Universal input voltage range 85 – 305 VAC
- Input inrush current limiting <30 A
- 800 W peak power (up to 10 s)
- Single 24, 48 VDC voltages
- Active PFC, EN61000-3-2 compliant (Class C, >25% load)
- Low earth leakage current (typ. <400  $\mu$ A, 264 VAC, 60 Hz)
- Over temperature, OV, OC and SC protections.
- Stand by +5 V, 1.5 A output.
- Remote On / Off signal
- IT approval to IEC/EN 62368-1
- LED lighting approval to UL 8750
- UV resistant input / output cables
- Overall dimensions 125.0 x 250.5 x 60.0 mm (4.92 x 9.86 x 2.36 in)
- RoHS 3 compliant (Directive 2015/863/EU)

#### Applications

- Video Wall Display and SSL Lighting
- Industrial Process Control and Automation
- Telecommunications / Broadcasting
- Harsh environment supply

## 1. MODEL SELECTION

MODEL NUMBER	PACKAGE & COOLING	INPUT VOLTAGE RANGE [VAC]	NOM. OUTPUT VOLTAGE [VDC]	MAX. OUTPUT POWER [W]	MAX. OUTPUT CURRENT [A]	DIMENSIONS
ABS601-1T24	Sealed Chassis Natural Convection	85 - 305	24	600	25	125.0 x 250.5 x 60.0 mm 4.92 x 9.86 x 2.36 in
ABS601-1T24-SL	Sealed Chassis Natural Convection + Control Signals	85 - 305	24	600	25	
ABS601-1T48	Sealed Chassis Natural Convection	85 - 305	48	600	12.5	
ABS601-1T48-SL	Sealed Chassis Natural Convection + Control Signals	85 - 305	48	600	12.5	

## 2. INPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT	
AC Input Voltage	PS starts and operates at 85 V <sub>AC</sub> at all load conditions	85	100-277	305	V <sub>RMS</sub>	
DC Input Voltage		170	-	300	V <sub>DC</sub>	
Input Frequency	440 Hz with reduced PFC and output power rating. Consult factory for details.	47	50/60	63	Hz	
Input Current	RMS at 180 V <sub>AC</sub> , maximum load, 50 / 60 Hz RMS at 85 V <sub>AC</sub> , maximum load, 50 / 60 Hz Cold start, 25 °C ambient, full load	-	-	4.0 8.5	A	
Inrush Current			115 V <sub>AC</sub> 230 V <sub>AC</sub>	20 30	A	
Fusing	High breaking, 10 A, 250 V on each AC lines.	-	-	10	A	
Efficiency	At 115 V <sub>AC</sub>	20% rated load	89	-	-	%
		50% rated load	93	-	-	
		100% rated load	92	-	-	
	At 230 / 277 V <sub>AC</sub>	20% rated load	90	-	-	
	50% rated load	94	-	-		
	100% rated load	94	-	-		
Input Power Consumption	Power on, 115 V <sub>AC</sub> , no load	-	-	5	W	
	Power on, 230 V <sub>AC</sub> , no load	-	-	4		
	Stand by, 115, 230 V <sub>AC</sub> , no load	-	-	0.35		
Power Factor	From 50 to 100% of rated load, 230, 115 V <sub>AC</sub> , 50 / 60 Hz input voltages.	0.90	-	-	-	
THDi	From 50 to 100% rated load, 115, 230, 277 V <sub>AC</sub> 50 / 60 Hz.	-	-	20	%	
Harmonic Current Fluctuations and Flicker	Complies with EN 61000-3-2 at 230 V <sub>AC</sub> , 50/60 Hz, Class A, D. Complies with EN 61000-3-2 Class C at 230 V <sub>AC</sub> , 50/60 Hz, >150 W load. Complies with EN 61000-3-3 at nominal voltages and full load.					
Earth Leakage Current	Normal conditions					
	115 V <sub>RMS</sub> , 60 Hz	-	170	-	μA	
	230 V <sub>RMS</sub> , 50 Hz	-	290	-		
	264 V <sub>RMS</sub> , 60 Hz	-	-	460		
277 V <sub>RMS</sub> , 60 Hz (worst case)	-	-	490			

## 3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT	
V1 Output Voltages	±0.5% set point accuracy RS+ closed on +V1, RS- closed on V1 RTN, at 20% load (-SL option).	-	24 48	-	V	
V1 Output Power Rating *	Convection cooling (Refer to the de-rating curves below) Peak (less than 10 s, after P_OK high)			600 800	W	
V1 Output Current *	V1: 24 V <sub>DC</sub> V1: 48 V <sub>DC</sub>			25.0 12.5	A	
V1 Voltage Adjustment Range	Manually by push up and down buttons	-	±5	-	%V1	
V1 Line Regulation	V <sub>AC</sub> : 85 – 305 V <sub>RMS</sub>	-	-	±0.1	%V1	
V1 Load-Line-Cross Regulation	V <sub>AC</sub> : 85 – 305 V <sub>RMS</sub> ; I <sub>1</sub> : 0 – 100%	-	-	±2	%V1	
V1 Ripple and Noise	Rated load, Peak-to-peak, 20 MHz BW. (100 nF ceramic, 10 µF tantalum at load)	-	-	1	%V1	
Transient Response: V1, 5V <sub>SB</sub> Voltage Deviation	25% load changes at 1 A/µs 24 V at 1000 µF load / I <sub>OUT</sub> > 2.5 A 48 V at 560 µF load / I <sub>OUT</sub> > 1.25 A 5 V <sub>SB</sub> at 560 µF load / I <sub>OUT</sub> > 0.1 A	-	-	±5	%V1 %V <sub>SB</sub>	
V1 Start-up Rise Time	85 < V <sub>IN</sub> < 305, any load conditions.	10	-	100	ms	
V1 Hold-up Time	At nominal V <sub>IN</sub> , full load	16	-	-	ms	
V1 Current Sharing Accuracy	Two units in parallel at I <sub>1</sub> rated load. VS-Logic and I-Share signals connected together. RS+, RS- signals connected together and to the load	45.5	-	54.5	%I <sub>1</sub>	
Start-up Delay	V1 in regulation after de-asserting PS_Inhibit V1 in regulation after AC is applied (worst case: 85 V <sub>AC</sub> ) 5V <sub>SB</sub> in regulation after AC is applied (worst case: 85 V <sub>AC</sub> )	-	-	450 2050 1500	ms	
Turn-on Overshoot		-	-	10 10	%V1 %V <sub>SB</sub>	
Minimum Load	V1, 5V <sub>SB</sub>	0	-	-	A	
Maximum Load Capacitance		V1: 24 V <sub>DC</sub> V1: 48 V <sub>DC</sub>	-	-	16000 8000	µF
5 V <sub>SB</sub> Output Voltage	±3% set point accuracy, 20% load.	-	5	-	V	
5 V <sub>SB</sub> Output Current		-	-	1.5	A	
5 V <sub>SB</sub> Load, line cross Regulation	V <sub>AC</sub> : 85 – 305 V <sub>RMS</sub> ; I <sub>SB</sub> : 0 – 100%	-	-	±5	%V <sub>SB</sub>	

\* Rated currents and combined power are referred to 55 °C ambient and V<sub>AC</sub> ≥ 180 V<sub>RMS</sub>.

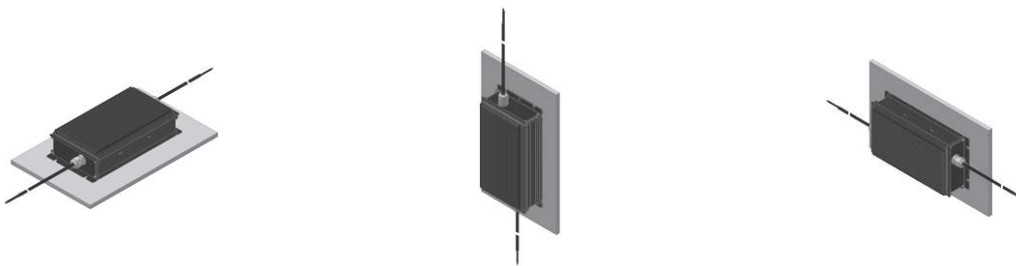


Figure 1. Mounting Orientation

3.1 OUTPUT POWER DE-RATING CURVES

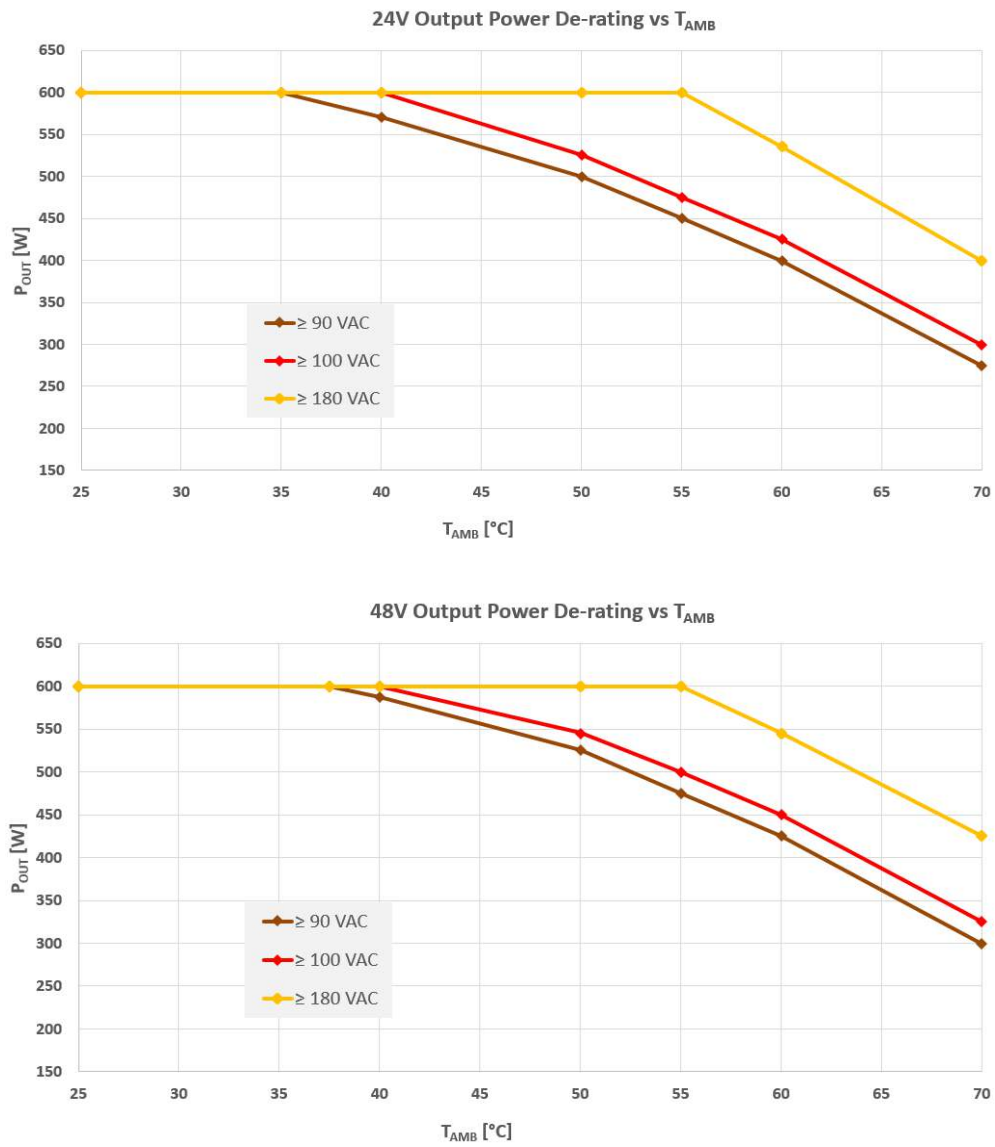


Figure 2. Power Derating Curves of ABS601 Series V1 P<sub>OUT</sub> to T<sub>AMB</sub>

Note: The de-rating curves are effective regardless mounting orientation


## 4. SIGNALS, CONTROLS & TIMING SPECIFICATIONS

Base signals and controls are accessible from signal connector P204.

SIGNAL	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
-PS_Inhibit	Active low. Input low voltage	0	-	1.5	V
	Input high voltage ( $I_{IN}= 300 \mu A$ )	3.5	-	5.5	V
	V1 disabled when -PS_Inhibit is pulled low				
	5V <sub>SB</sub> not affected by -PS_Inhibit				
P_OK*	Logic level low (<10 mA sinking)	-	-	0.7	V
	Logic level high (100 $\mu A$ sourcing)	2.4	-	5.5	V
	Low to high time after V1 in regulation	40	-	350	ms
5V <sub>SB</sub> Output	Power down warning time	1	-	-	ms
	Active and in regulation after a $85 < V_{AC} < 264$ is applied	-	-	1500	ms
	5V <sub>SB</sub> not affected by PS_Inhibit				


\* When V1 is On, a P\_OK low may indicates V1 under voltage condition. When two ABS601 operate in parallel, P\_OK low in one unit indicates that it is not sharing the expected amount of current (current sharing fault). A 10 k $\Omega$  internal pull up to 5V<sub>SB</sub> is used; do not add any other external pull up.

### AC/DC INPUT OFF-TO-ON AND ON-TO-OFF TIMINGS

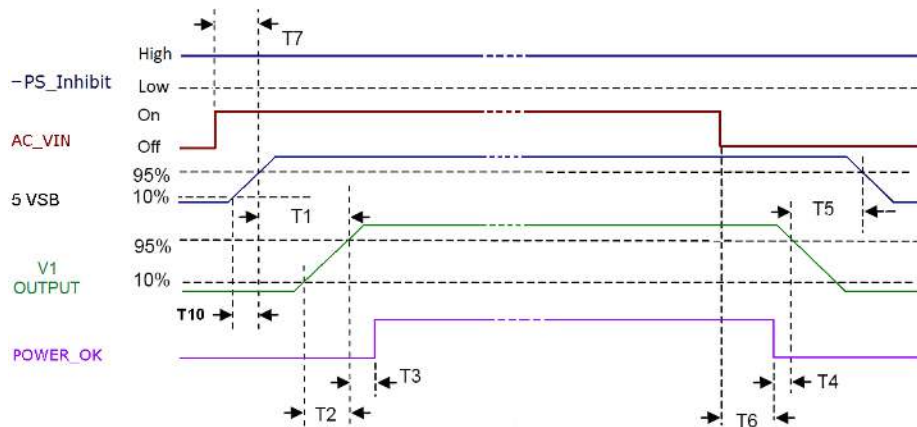

5V <sub>SB</sub> On – V1 On	250 ms ≤ T1 ≤ 550 ms
V1 rise time	10 ms ≤ T2 ≤ 100 ms
5V <sub>SB</sub> rise time	3 ms ≤ T10 ≤ 40 ms
V1 On – POWER_OK delay	200 ms ≤ T3 ≤ 350 ms
Power down warning	T4 ≥ 1 ms
V1 Off – 5V <sub>SB</sub> Off	T5 ≥ 0.5 s (V1 load > 25 W)
AC Off – POWER_OK low	T6 ≥ 15 ms
AC_On – 5V <sub>SB</sub> turn on time	T7 ≤ 1.5 s

**PS\_INHIBIT OFF-TO-ON AND ON-TO-OFF TIMINGS**

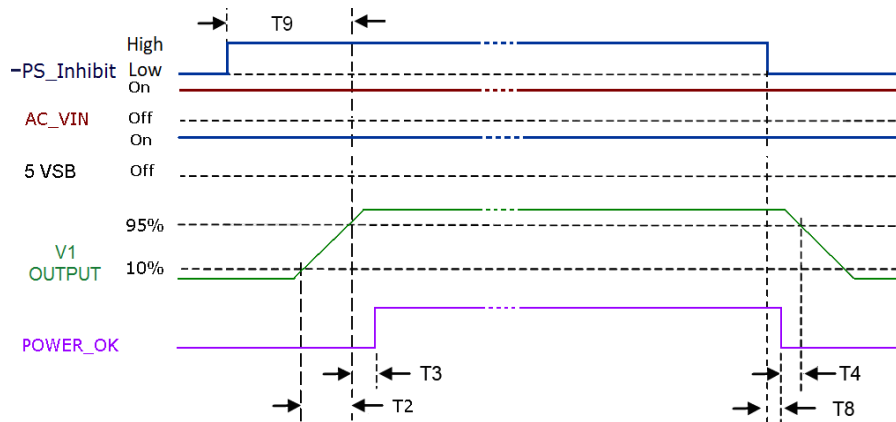

V1 rise time	10 ms ≤ T2 ≤ 100 ms
V1 On – POWER_OK delay	200 ms ≤ T3 ≤ 350 ms
Power down warning	T4 ≥ 1 ms
PS_Inhibit – POWER_OK low timing	T8 ≤ 2 ms
PS_Inhibit – V1 On delay	T9 ≤ 450 ms

**5. PROTECTION SPECIFICATIONS**

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Input Under Voltage	Auto-recovering	58	75	82	V <sub>AC</sub>
Input Fuse	High breaking, 10 A, 250 V on L and L1.	-	-	10	A
Over Current	At nominal input voltages				
	V1: Hiccup mode, auto-recovering (>10 s)	108	-	132	%I <sub>1Rated</sub>
	V1: Hiccup mode, auto-recovering (<10 s)	135	-	163	%I <sub>1Rated</sub>
Short Circuit	5 V <sub>SB</sub> : Hiccup mode, auto-recovering:	1.6	-	3.6	A
	At nominal input voltages				
Over Voltage	V1: Hiccup mode, auto-recovering.	-	-	-	
	5V <sub>SB</sub> : Hiccup mode, auto-recovering.	-	-	-	
Over Voltage	V1, Power shut down, latch off.	120	-	145	%V <sub>NOM</sub>
Over Temperature (on primary stage)	5V <sub>SB</sub> , Hiccup mode, auto-recovering.	-	-	150	
Over Temperature (on secondary side)	Shut down, latch off.	-	-	-	°C
Isolation: Primary-to-Secondary	Reinforced	5660	-	-	V <sub>DC</sub>
	Basic	4000	-	-	V <sub>AC</sub>
Isolation: Input-to-Earth	Basic	2121	-	-	V <sub>DC</sub>
	Production tested at 2121 V <sub>DC</sub>	1500	-	-	V <sub>AC</sub>
Isolation: V1-to-5V <sub>SB</sub>	Basic	100	-	-	V <sub>AC</sub>
Isolation: Output-to-Earth	Basic	1500	-	-	V <sub>AC</sub>
Equipment Protection Class	Class I, compatible with BF (Body Floating) ME (Medical Equipment)				

## 6. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	MIN	NOM	MAX	UNIT
Operating Temperature Range	No de-rating up to 55°C, at $\geq 180 V_{AC}$	-30	-	55	°C
Operating Temperature Range with Derating	See derating curves and conditions in the Output Specifications section	-	-	70	°C
Storage Temperature	As per IEC/EN 60721-3-1 Class 1K4	-40	-	85	°C
Transportation Temperature	As per IEC/EN 60721-3-2 Class 2K4				
Humidity	RH, Non-condensing Operating. Non-operating	-	-	90 95	% %
Operating Altitude		-	-	5000	m
Shock	<b>EN 60068-2-27</b> Operating: Half sine, 30 g, 18 ms, 3 axes, 6x each (3 positive and 3 negative). Non-Operating: Half sine, 50 g, 11 ms, 3 axes, 6x each (3 positive and 3 negative).				
	<b>EN 60068-2-64</b> Operating: Sine, 10 – 500 Hz, 1 g, 3 axes, 1 oct/min., 60 min. Random, 5 – 500 Hz, 0.02 g <sup>2</sup> /Hz, 1 g <sub>RMS</sub> , 3 axes, 30 min. Non-Operating: 5 – 500 Hz, 2.46 g <sub>RMS</sub> (0.0122 g <sup>2</sup> /Hz), 3 axes, 30 min.				
MTBF	Full Load, 40 °C ambient 80% Duty cycle, Telcordia SR-332 Issue 2	200000	-	-	Hours
Useful Life	Nominal $V_{IN}$ , 80% load, 40 °C ambient (IPC9592)	-	10	-	Years

## 7. ELECTROMAGNETIC COMPATIBILITY (EMC) – EMISSIONS

PARAMETER	DESCRIPTION / CONDITION	STANDARD	PERFORMANCE CLASS
Conducted	115, 230, 277 $V_{RMS}$ , Maximum load	EN 55032 (ITE) EN 55011 (ISM) FCC Part 15	B
Radiated	The “SL” variant compliance to the Class B is conditioned by the use of a common ground plane between the power supply and its load	EN 55032 (ITE) EN 55011 (ISM) FCC Part 15	B
Line Voltage Fluctuation & Flicker	At 20%, 50% and 100% maximum load Nominal input voltages	EN 61000-3-3	
Harmonic Current Emission	230 VAC input voltage, 50 / 60 Hz 230 VAC 50 / 60 Hz, >150 W load	EN 61000-3-2 EN 61000-3-2	A, D C

## 8. ELECTROMAGNETIC COMPATIBILITY (EMC) – IMMUNITY

PARAMETER	DESCRIPTION / CONDITION	STANDARD	TEST LEVEL	CRITERIA	
ESD	Reference standard for ITE	EN 55024			
	Reference standard for Industrial/IMS equipment	EN 61000-6-2			
ESD	15 kV air discharge, 8 kV contact, at any point of the system.	EN 61000-4-2	4	A	
Radiated Field	10 V/m, 20-2700 MHz, 1 KHz, 80% AM.	EN 61000-4-3	3	A	
Electric Fast Transient	$\pm 2$ kV on AC power port for 1 minute	EN 61000-4-4	3	A	
Surge	$\pm 2$ kV line to line; $\pm 4$ kV line to earth on AC power port	EN 61000-4-5	4	A	
Conducted RF Immunity	10 $V_{RMS}$ , 0.15-80 MHz, 1 kHz, 80% AM	EN 61000-4-6	3	A	
Dips and Interruptions	200 – 277 $V_{AC}$ :	Drop-out to 0% for 10 ms	EN61000-4-11	A	
		Dip to 40% for 5 cycles (100 ms)	EN61000-4-11	A	
		Dip to 70% for 25 cycles (500 ms)	EN61000-4-11	A	
		Drop-out to 0% for 5 s	EN61000-4-11	B	
	100 – 127 $V_{AC}$ :	Drop-out to 0% for 10 ms	EN 61000-4-11		A
		Dip to 40% for 5 cycles (100 ms)	EN 61000-4-11		A (derate to 150 W)
		Dip to 70% for 25 cycles (500 ms)	EN 61000-4-11		A (derate to 400 W)
		Drop-out to 0% for 5 s	EN 61000-4-11		B



Asia-Pacific +86 755 298 85888 Europe, Middle East +353 61 49 8941 North America +1 866 513 2839

9. SAFETY AGENCIES APPROVALS

CERTIFICATION BODY	SAFETY STANDARDS	CATEGORY
CSA / UL	CSA C22.2 No. 60950-1, UL 60950-1, UL 62368-1	Audio Video and Information Technology Equipment
IEC IECEE CB Certification	UL8750, CSA C22.2 No 250.13 IEC/EN 62368-1	Lighting Audio Video and Information Technology Equipment
CE	Directive 2014/35/EU: Electrical Safety: Low Voltage electrical equipment (LVD) Directive 2014/30/EU: Electromagnetic Compatibility (EMC) Directive 2015/863/EU: RoHS 3	Audio Video and Information Technology Equipment
	Designed to meet IEC/EN/UL/CSA 61010-1 2nd edition	

10. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION
Weight	2770 g (6.11 lb) 2850 g (6.28 lb) – SL models
Overall Dimensions	125.0 x 250.5 x 60.0 mm (4.92 x 9.86 x 2.36 in)


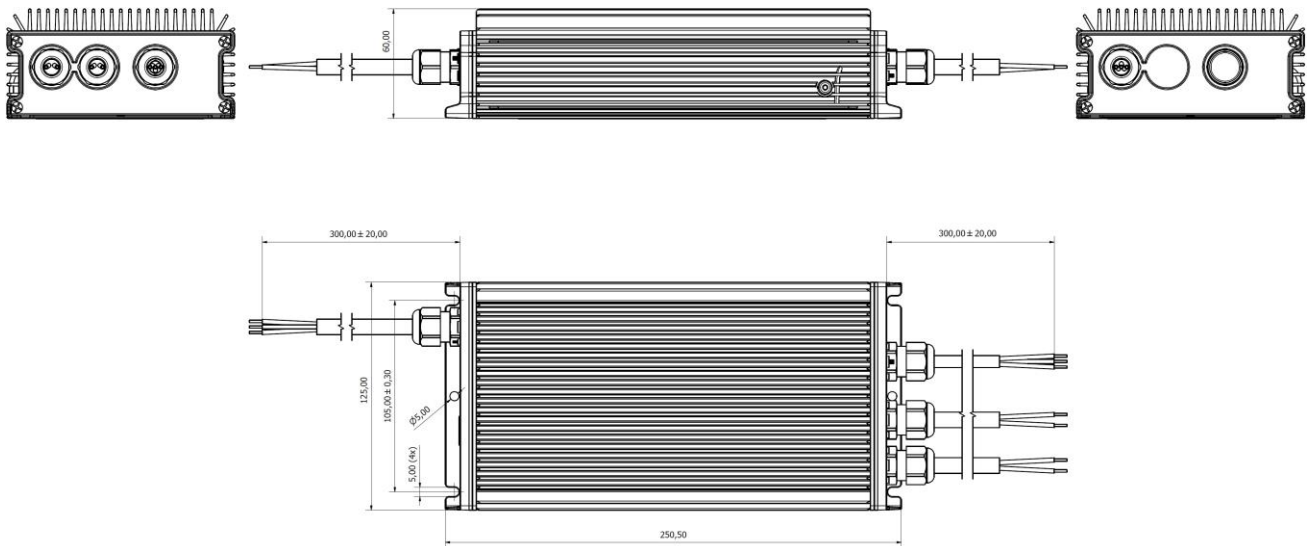


Figure 3. Mechanical drawing




## 11. CONNECTIONS AND PIN DESCRIPTION

### INPUT CABLE


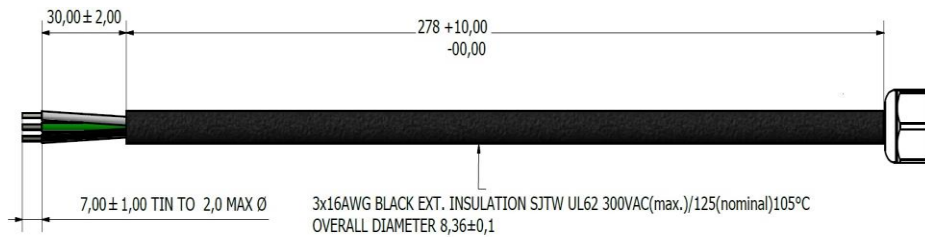


WIRE COLOR	FUNCTION
BLACK	Line
GREEN	PG
WHITE	Neutral


### OUTPUT CABLE

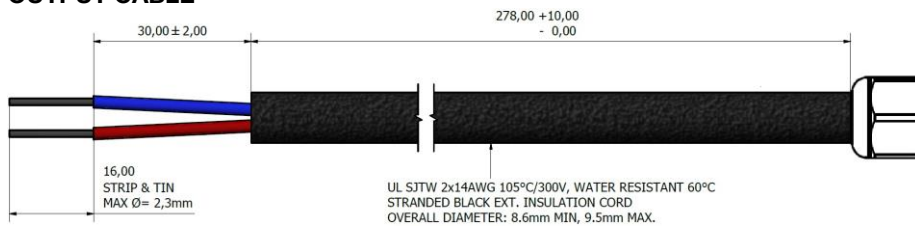



WIRE COLOR	FUNCTION
RED	+V1
BLUE	V1 RTN



### SIGNAL CABLE

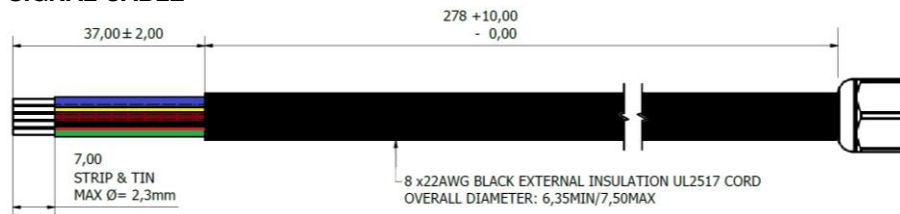

WIRE COLOR	FUNCTION
BLACK	RTN
RED	+5 VSB
BROWN	RS-
GREEN	P_OK
YELLOW	- PSINHIBIT
GREY	VS_LOGIC
BLUE	I SHARE 1
WHITE	RS+



For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.