

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PRAIRIE, ILLINOIS

FED. MFR. CODE 91929

SWITCH-BASIC

CATALOG LISTING
ISEI-12

ISEI-12
ISSUE 5

ISEI-12
PAGE 1 OF 1

M

DRAWING NUMBER

ISSUE
X
10
9

REVISIONS

A	CO 16449	D A W	12 JAN 62
B	CO-34213	J A L	24 SEPT 74
C	CO 51463-G	WJM	27 JUL 83
D	CO57041A	CJH	21 MAR 85
E	CO94274	DLM	MAR 99

REPLACES

RELEASE NO.

CHECK


CHECK

27 FEB 62

D A W 12 JAN 62

FORMTEK

FO-50376

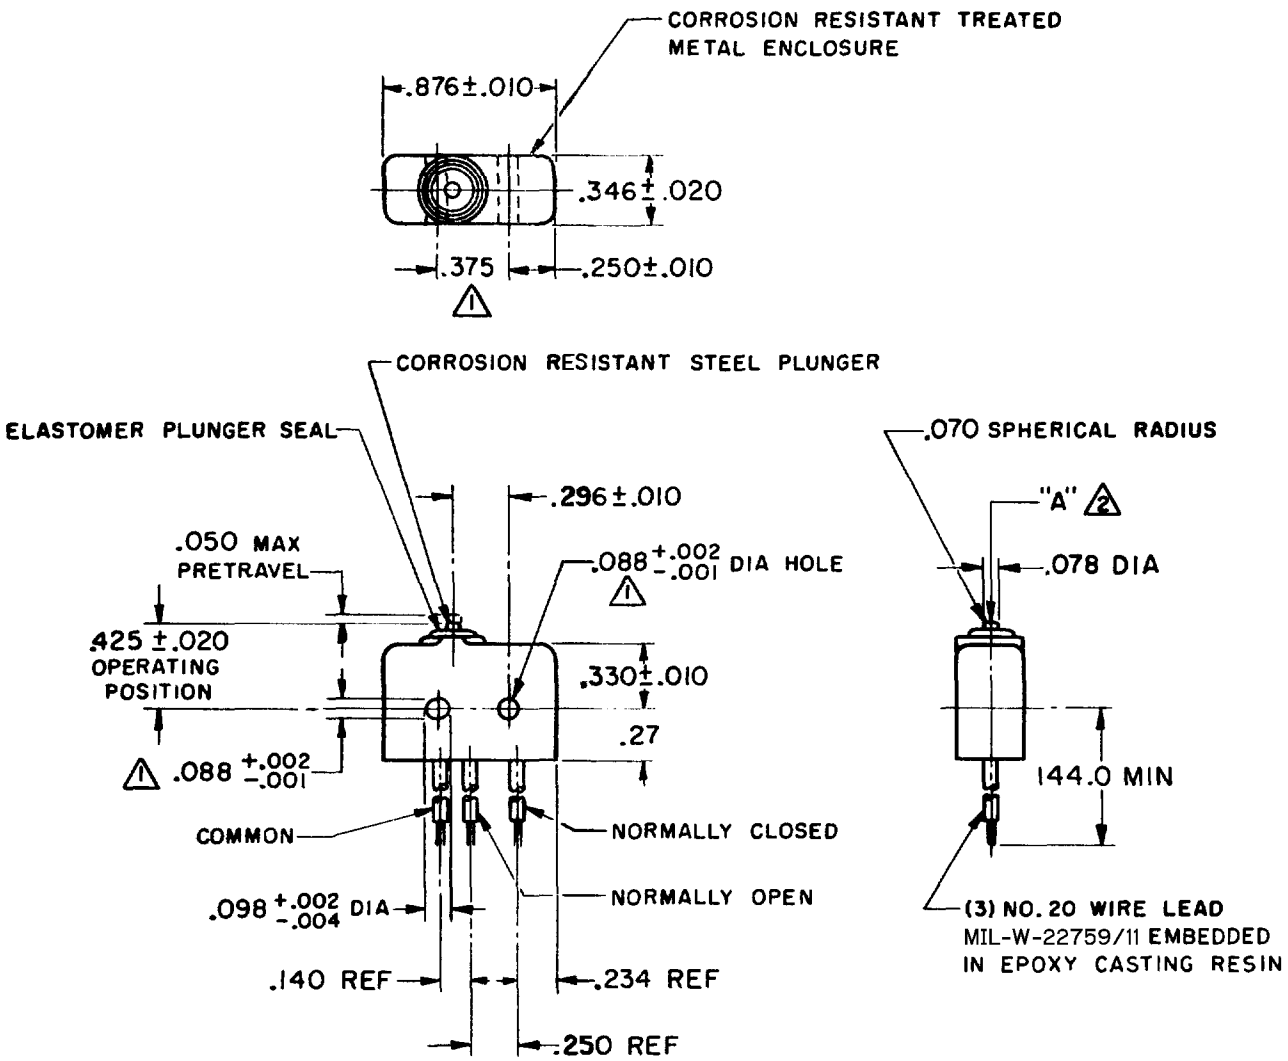

- NOTE -**
- 1 - MOUNTING HOLES WILL ACCEPT .087 MAX DIA PINS OR SCREWS ON .375 ±.002 CENTERS
 - 2 - ACTUATION IN LINE WITH ARROW "A" IS RECOMMENDED
 - 3 - WEIGHT OF SWITCH ONLY IS .26 OZ MAX. WEIGHT OF SWITCH WITH WIRE LEADS IS 4.65 OZ MAX

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE ----- 5-17 OZ	CONTACT ARRANGEMENT P D T	DO NOT SCALE PRINT
RELEASE FORCE ----- 4 OZ MIN	250 VAC ----- 5 AMP	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:
RELEASE TRAVEL ----- .004 MIN	30 VOLTS DC RATING	
DIFFERENTIAL TRAVEL ----- .004 MAX	INDUCTIVE ----- SEA LEVEL ----- 3 AMP	ONE PLACE (.0) ±.030
OVERTRAVEL ----- .003 MIN	RESISTIVE ----- SEA LEVEL ----- 5 AMP	TWO PLACE (.00) ±.015
	MAXIMUM INRUSH ----- 24 AMP	THREE PLACE (.000) ±.005
		ANGLES ±
		WEIGHT 3