




TOP VIEW





SIDE VIEW

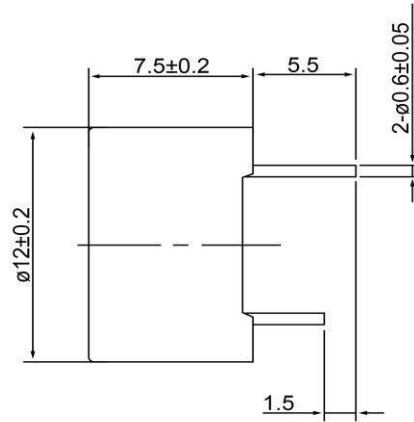

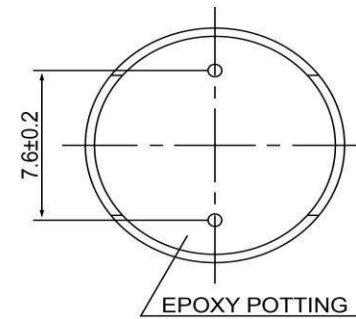BOTTOM VIEW



Specifications			Notes	Revision History																							
Description	Value	Unit		Version	Description	Date	Approved																				
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S																				
Resonant Frequency	3,100	(Hz)																									
Rated Voltage	5	(V)																									
SPL @ 10cm	85	(dBA)																									
Tone	Single																										
Mount Type	Thru Hole																										
Voltage Range	3 ~ 7	(V)																									
Max Rated Current	30	(mA)																									
Housing Material	NORYL																										
Operating Temperature	-30 ~ +70	°C																									
Storage Temperature	-40 ~ +85	°C																									
Weight	2	(g)																									
						<table border="1"> <thead> <tr> <th>Drawn by</th> <th>Date</th> <th>Checked by</th> <th>Date</th> <th>Approved by</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td>A.B.</td> <td>10/21/2013</td> <td>C.E.</td> <td>10/21/2013</td> <td>J.S</td> <td>10/21/2013</td> </tr> </tbody> </table>	Drawn by	Date	Checked by	Date	Approved by	Date	A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013	<table border="1"> <thead> <tr> <th colspan="3">Electro-Mechanical Indicator</th> </tr> </thead> <tbody> <tr> <td colspan="3" style="text-align: center;"><b>IE123105-1</b></td> </tr> </tbody> </table>			Electro-Mechanical Indicator			<b>IE123105-1</b>		
						Drawn by	Date	Checked by	Date	Approved by	Date																
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013																						
Electro-Mechanical Indicator																											
<b>IE123105-1</b>																											

Additional considerations can be found at [www.dbunlimitedco.com/technical-articles](http://www.dbunlimitedco.com/technical-articles).