

# PANEL MOUNT INDICATOR, NON-RELAMPABLE

## LED TECHNOLOGY

MOUNTING HOLE, Ø 0.380"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
<b>LED 12V SERIES</b>				
WL-6091M1-12V	RED	12V-14V	20mA	100,000
WL-6091M3-12V	AMBER	12V-14V	20mA	100,000
WL-6091M5-12V	GREEN	12V-14V	20mA	100,000
WL-6091M6-12V	BLUE	12V-14V	20mA	100,000
WL-6091M7-12V	YELLOW	12V-14V	20mA	100,000
<b>LED 24V SERIES</b>				
WL-6091M1-24V	RED	24V-28V	20mA	100,000
WL-6091M3-24V	AMBER	24V-28V	20mA	100,000
WL-6091M5-24V	GREEN	24V-28V	20mA	100,000
WL-6091M6-24V	BLUE	24V-28V	20mA	100,000
WL-6091M7-24V	YELLOW	24V-28V	20mA	100,000

## NOTES


1. Recommended panel thickness  
0.030" to 0.250"
2. 6" leads with 1/2" strip are standard
3. Storage temperature  
 $T_{STG}$ : -25°C - +80°C
4. Ambient temperature  
 $T_A$ : -20°C - +60°C
5. Voltage tolerance  
 $V_{OP}$ : ±10%
6. Body material  
Nylon, white
7. Lens material  
Polycarbonate
8. Bezel material  
Stainless steel
9. Wire gauge  
18 AWG
10. Gaskets  
Buna-N
11. Mounting hardware (nut, lock washer, and gasket) included

## CERTIFICATIONS

UL (E340667), RoHS



## DIMENSIONAL CHARACTERISTICS

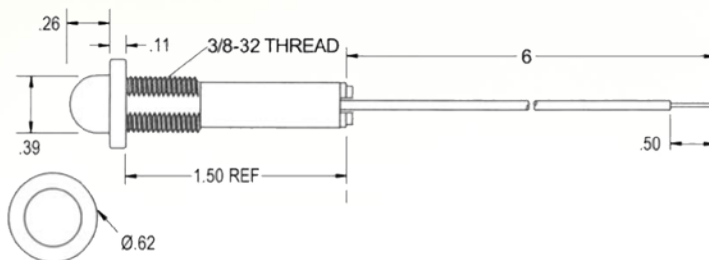

unless otherwise specified, all dimensions are in inches



## OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

- ▶ Splash proof
- ▶ Outdoor applications
- ▶ NEMA 3-R

