

Economy Power 2.5 TE Internal #: 1744417-2 Housing, Receptacle, Wire-to-Board, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5

### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings



Connector Product Type: Housing Connector & Housing Type: Receptacle Connector System: Wire-to-Board Number of Positions: 2

## Centerline (Pitch): 2.5 mm [.098 in]

### Features



### Product Type Features

| Connector Product Type            | Housing       |
|-----------------------------------|---------------|
| Connector & Housing Type          | Receptacle    |
| Connector System                  | Wire-to-Board |
| Sealable                          | No            |
| Connector & Contact Terminates To | Wire & Cable  |
| Configuration Features            |               |
| Number of Positions               | 2             |
| Number of Rows                    | 1             |
| Electrical Characteristics        |               |
| Operating Voltage                 | 250 VAC       |
| Body Features                     |               |
| Primary Product Color             | Natural       |
| Contact Features                  |               |
|                                   |               |

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



| Contact Layout                     | Inline                     |
|------------------------------------|----------------------------|
| Contact Type                       | Socket                     |
| Termination Features               |                            |
| Termination Method to Wire & Cable | Crimp                      |
| Mechanical Attachment              |                            |
| Strain Relief                      | Without                    |
| Panel Mount Feature                | Without                    |
| PCB Mount Retention                | Without                    |
| Mating Retention Type              | Latch                      |
| Mating Retention                   | With                       |
| Connector Mounting Type            | Cable Mount (Free-Hanging) |
| Housing Features                   |                            |
| Housing Entry Configuration        | Both Ends Closed           |
| Housing Material                   | Nylon                      |
| Centerline (Pitch)                 | 2.5 mm[.098 in]            |
| Dimensions                         |                            |
| Connector Length                   | 7.3 mm[.287 in]            |

| Usage ConditionsOperating Temperature Range-55 - 105 °C[-67 - 221 °F]Operation/Application-55 - 105 °C[-67 - 221 °F]Circuit ApplicationPowerCircuit ApplicationPowerIndustry StandardsSilow Wire RatingGlow Wire RatingGlow WireUL Flammability RatingUL 94V-0 |
|--|
| Operation/Application         Circuit Application       Power         Industry Standards         Glow Wire Rating       Glow Wire  |
| Circuit ApplicationPowerIndustry StandardsGlow Wire Rating   |
| Industry Standards       Glow Wire Rating   Glow Wire  |
| Glow Wire Rating Glow Wire   |
|  |
| UL Flammability Rating UL 94V-0  |
|  |
| Packaging Features   |
| Packaging Quantity 500   |
| Packaging Method Bag   |
| Product Compliance<br>For compliance documentation, visit the product page on TE.com>  |
| EU RoHS Directive 2011/65/EU Compliant   |

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5




| EU ELV Directive 2000/53/EC                   | Compliant   |
|---|---|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold   |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2023<br>(235)<br>Candidate List Declared Against: JUNE<br>2023 (235)<br>Does not contain REACH SVHC |
| Halogen Content                               | Not Low Halogen - contains Br or Cl > 900<br>ppm.   |
| Solder Process Capability                     | Not applicable for solder process capability  |

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

## **Compatible Parts**

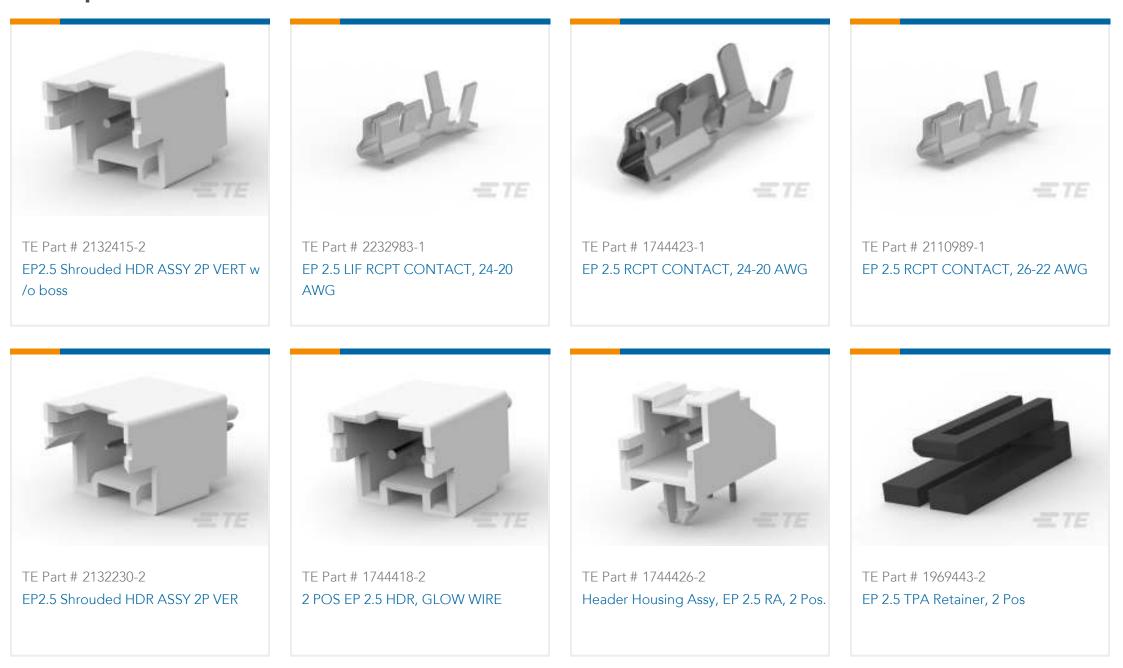


Housing, Receptacle, Wire-to-Board, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5





# Also in the Series | Economy Power 2.5

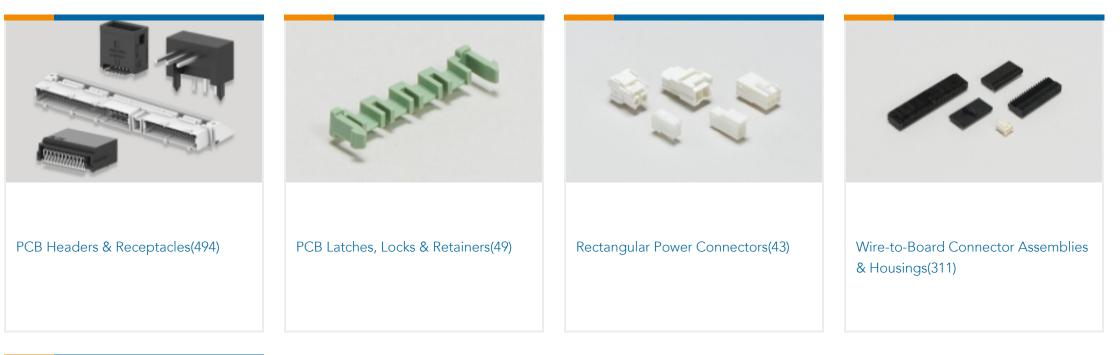



Wire-to-Board Connector Contacts(6)

## Customers Also Bought









TE Part #1969442-6 EP 2.5 TPA Housing, 6 Pos

TE Part #1744417-6 6 POS EP 2.5 HSG, GLOW WIRE TE Part #2238007-1 TERMINAL, PIN, LANCELESS, 22-26 AWG, EP2

TE Part #1744426-2 Header Housing Assy, EP 2.5 RA, 2 Pos.



TE Part #1-1744417-0 10 POS EP 2.5 HSG, GLOW WIRE



TLRP 2512 2.0W R033 1% 75PPM 4K RL

**C** For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 2 Position, .098 in [2.5 mm] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



### Documents

**Product Drawings** 2 POS EP 2.5 HSG, GLOW WIRE

English

### **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1744417-2\_D.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1744417-2\_D.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1744417-2\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Datasheets & Catalog Pages** 7-1773461-6\_EP2.5\_Connector\_Series

English

**Product Specifications** Application Specification

English

**Product Environmental Compliance** 

MD\_1744417-2\_032220181011\_dmtec

English

MD\_1744417-2\_032220181011\_dmtec

English

Agency Approvals UL Report

English