


NOTES:

1. ASSEMBLY MARKED WITH MOLEX, MOLEX P/N, REV & DATE CODE IN YYWW FORMAT. SEE EXAMPLE 1.
2. CONNECTOR HARDWARE TO BE SUPPLIED HAND TIGHTENED TO CONNECTOR.

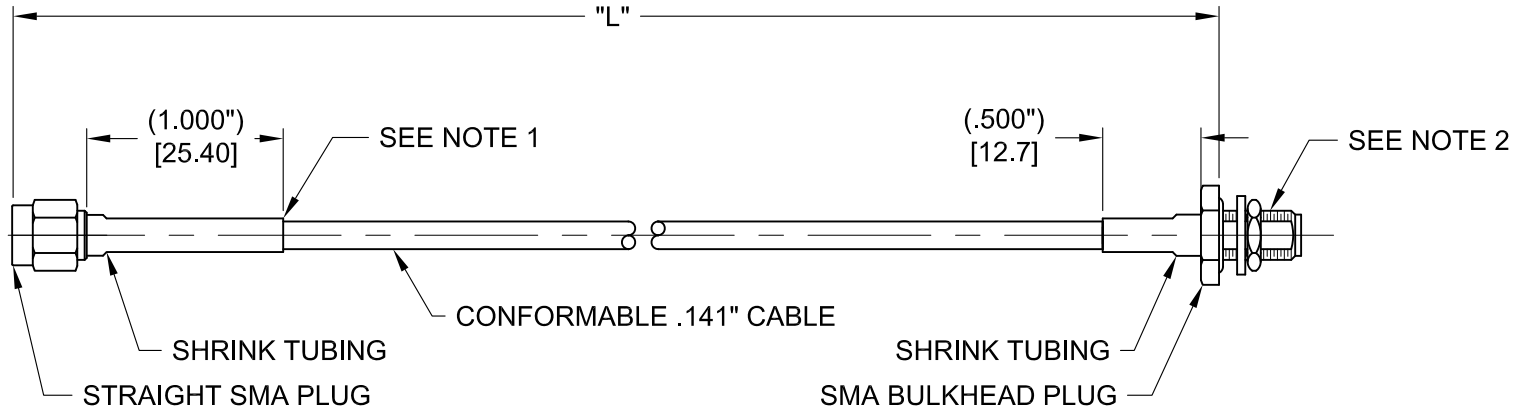

MOLEX P/N	2GHz		6GHz		FCT P/N	LENGTH	TOLERANCE
	VSWR MAX	IL MAX	VSWR MAX	IL MAX			
73230-9330	1.10	.150 dB	1.15	.200 dB	24P104C24J1-003	3.000"	±.100
73230-9331	1.10	.200 dB	1.15	.350 dB	24P104C24J1-006	6.000"	±.150
73230-9333	1.10	.250 dB	1.15	.450 dB	24P104C24J1-009	9.000"	±.150
73230-9332	1.10	.400 dB	1.15	.690 dB	24P104C24J1-012	12.000"	±.175
73230-9334	1.10	.550 dB	1.15	1.000 dB	24P104C24J1-018	18.000"	±.200

EXAMPLE 1:

MOLEX 73230-933X
REV. XX YYWW

QUALITY SYMBOLS ∇ = 0 ∇ = 0 ∇ = 0 ▼ = 0 ∇ = 0 ⊠ = 0 ■ = 0 ∇ = 0	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				DIMENSION UNITS INCH [mm]		SCALE NTS					
	EC NO: 689506 DRWN: JWB CHKC: JED REV: APPR: KJT		03/29/2021 03/31/2021 03/20/2021		DRWN BY DP		DATE 03/17/08				CABLE ASSEMBLY - SMA PLUG TO SMA BULKHEAD JACK ON .141 CONFORMABLE	
	RELEASED TO GENERAL MARKET UPDATE		GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D BY TC		DATE 04/04/08		PRODUCT CUSTOMER DRAWING			
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		4 PLACES ± ± 3 PLACES ± ± 2 PLACES ± ± 1 PLACES ± ± 0 PLACES ± ±		APPR BY KT		DATE 04/04/08					
	DIMENSION UNITS MM INCH		ANGULAR TOL ± °		DRAWING SIZE A		THIRD ANGLE PROJECTION		MATERIAL NUMBER SEE TABLE			
	CUSTOMER GENERAL MARKET		DOCUMENT NUMBER SD-73230-933		DOC TYPE PSD		DOC PART 000		SHEET NUMBER 1 OF 1			