

**Accessories Miniature PCB Relay RYII**

- Accessories for Miniature PCB Relay RYII, pinning 3.2 mm
- Socket with PCB terminals
- No reduction of protection class or creepage/clearance with plastic retainer
- Easy replacement of relays
- Socket can be used as connector for diagnosis function
- Sockets and accessories: RoHS compliant (Directive 2002/95/EC)
- Not suitable for MSR-type



F0125-A


**Socket with PCB terminals**

**RY 78 600** pinning 3.2 mm

**Approvals**



Technical data	RY 78 600
Rated voltage / max. switching voltage AC	240 / 400 VAC
Rated current	12 A
Limiting continuous current	see derating curve
Dielectric strength coil-contact circuit	5000 V <sub>rms</sub>
Clearance / creepage coil-contact circuit	≥ 8/8 mm
Material group of insulation parts	IIIa
Insulation to IEC 60664-1	
Type of insulation coil-contact circuit	reinforced
open contact circuit	functional
Rated insulation voltage	250 V
Pollution degree	2
Rated voltage system	230 / 400 V
Overvoltage category	III
RoHS - Directive 2002/95/EC	compliant
Ambient temperature range	-40...+80°C
Terminals	pcb
Insertion cycles	A (10)
Max. Insertion Force total	100 N
Mounting distance	≥ 0, dense packing
Resistance to soldering heat	270°C / 10 s
Weight	3 g
Packaging unit	100 pcs

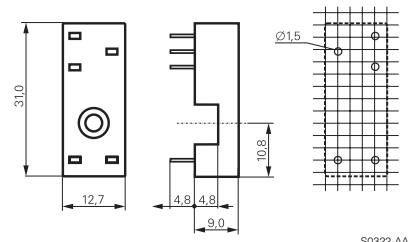


S0322-AA

**Socket with PCB terminals**

Type	Part Number
<b>RY 78 600</b> Socket with PCB terminals, pinning 3.2 mm	7-1393161-3

**Accessories for RY78600**

<b>RY 16 037</b> Plastic retaining clip	6-1393161-5
---	-------------

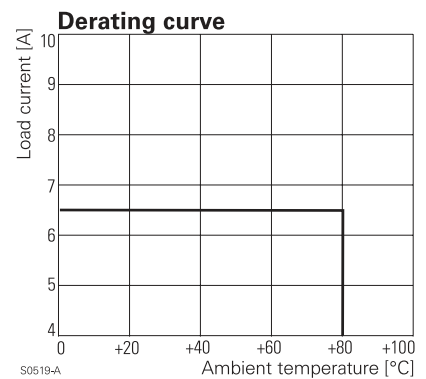

S0519-A