



Que-2-TXT™
Questions?
scan to text us fast



HID EQUAL LED LAMPS

Moon Beam

HID equal



specifications

Consumption	Voltage	CRI	Lens	Heat Sink	L70 hours	Surge Protection	Ambient Temp (F)	Power Factor	UL listing	THC	Beam Angle	Enclosed Fixture Rated
70 W	100 - 277 V ⚡	> 80	clear polycarbonate	aluminum	50,000	4 KV built-in	-22° -113°	> 0.9	damp location	< 20%	omni-directional	yes

select your lamp

Part Number	Color Temp	Base	Lumen Output	Efficacy
GI-MB-C250-UL4	5000K	EX39	10,500	150 lm / W

other

Dimensions	Case QTY	Gross Weight	Warranty
11.57" (L) x 7.01" (W) x 7.8" (D)(OPEN)	8 pcs	2.86 lbs	6 years

add your accessories*


Accessories Part Number	Description
GI-ACC-MBMS	motion sensor
GI-ACC-MBPC	photocell
GI-ACC-MBWF	wifi sensor
GI-ACC-MBDC	dimming connector




*optional

Features


- 50,000 hour LED lifespan based on IES LM-80 results and TM-21 calculations
- Photocell, motion sensor, wifi sensor and dimming accessories available separately
- Foldable wings and rotateable base

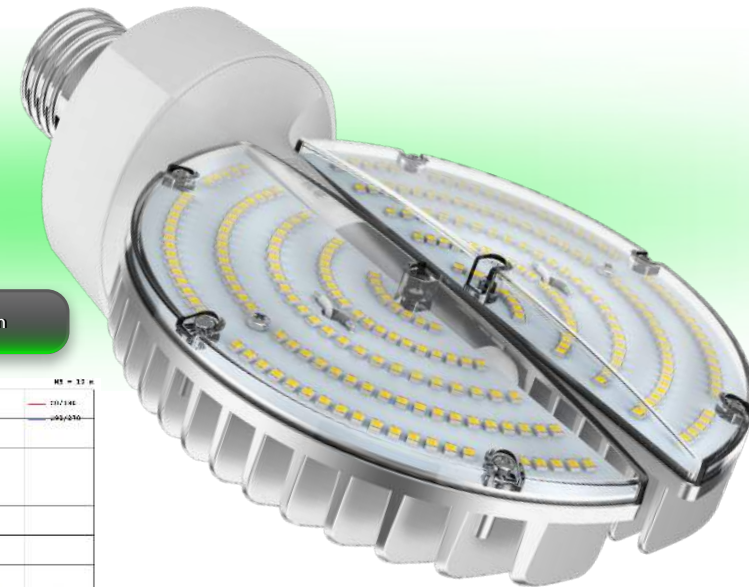

Luminous Intensity Diagram

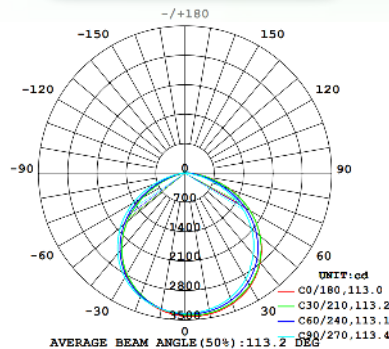

Distance VS Illumination

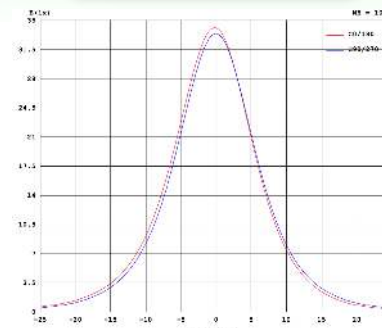

Not all product variations listed on this page may be DLC qualified. Visit www.designlights.org/search to confirm qualification.



/greenignite
@greenignite



www.greenignite.com



info@greenignite.com



1-877-560-3779