

NOTES:


1) LABEL REQUIREMENT:

- LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- LOCATE APPROXIMATELY AS SHOWN.

2) TEST REQUIREMENT:

IL @ 1310 nm SHALL BE 3.25 dB MAX.

REVISION HISTORY - ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/13	

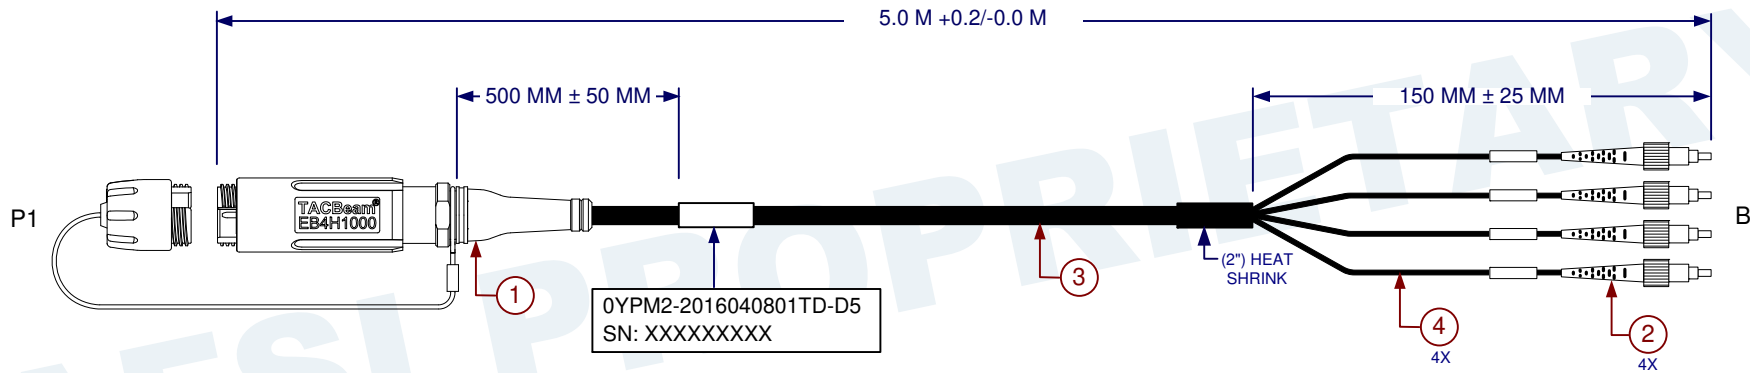

4	BSFT0600	FURCATION TUBE, 2MM ID600UM, BLACK	2 FEET
3	WTTO-0400	CABLE, 4 FIBER 9/125 TACTICAL DISTRIBUTION	17.06 FEET
2	BFCC2000-BL-1	FC SM CONNECTOR, METAL BODY W/CERAMIC FERRULE; BLUE BOOT	4
1	EB4H1000-3445	PLUG ASSY, BLACK ALUM, 4 CH, 1310/1550 SM, TACBEAM 4.5-6.0 MM	1
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

P1	PINOUT DIAGRAM	B LABEL INFORMATION
A1	●————●	A1
B1	●————●	B1
A2	●————●	A2
B2	●————●	B2

MATERIAL:		DFTR/Designer: 2017/10/20		
		Check By: 2017/10/24		
		Manufacturing: 2017/10/24		
		Market Manager/PLM: 2017/10/25		
DRILLED HOLE DIAMETER TOLERANCE		Configuration Management: 2017/11/13	TITLE: 4 CHANNEL TACBEAM PLUG TO FC ASSEMBLY, SM	
DO NOT SCALE DRAWING			SIZE: A	CAGE CODE: 0YPM2
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES			DWG NO: 2016040801TD-D5	REV: -
TOL ON ANGLES 13°			SCALE: NONE	SHEET 1 OF 1
1 PL ±.1 2 PL ±.02 3 PL ±.010				
INTERPRET DIM AND TOL PER ASME 14.5M-1994				