



Midas Touch

magic embedded

We are dedicated in image processing technology and customize the image quality to meet the real needs of customers.

There are many brand products with our advanced image technology in the market.

MCY-1360 Datasheet 360-degree Camera Module

Midas Touch, Inc.

17F-16, No. 1, Sec. 1, Zhongshan Rd., Banqiao Dist.,
New Taipei City 22063, Taiwan (R.O.C.)

[Email: contact@midastouchinc.com](mailto:contact@midastouchinc.com)

Tel : +886-2-7729-4139

Fax : +886-2-7729-4149



Revision History

Date	Rev.	Contents
2021/1/18	V1.0	First release



Table of Contents

1. General Description	3
2. Features	3
3. Applications.....	3
4. Key Specification	4
5. Max Frame Rate.....	5
6. Pin Description	5
7. Outline Specification	6



1. General Description

The MCY-1360A-J1-T90 is an USB Video Class (UVC) and USB Audio Class (UAC) compliant camera module with video and audio feature for conference call applications. The MCY-1360A-J1-T90 provide 360-degree video and omnidirectional sound reception, it can make your video conference even better.

2. Features

- Compliant to USB2.0 and USB Video Class & USB Audio Class
- Support still image capture and video streaming
- Provide Multi-Display Modes
 - ◆ 360° Panorama View
 - ◆ 360° Meeting View
 - ◆ 360° Panorama + Single View
 - ◆ 360° Panorama + Dual View
 - ◆ 360° Conner View
 - ◆ 180° Panorama View
- Quickly switch the display mode via the button
- Use the button to switch to mute mode
- Support 1080p to 30fps
- Automatic image control
 - ◆ Automatic Exposure Control (AEC)
 - ◆ Automatic White Balance (AWB)
- LED indicated
 - ◆ Camera active – Blue
 - ◆ Mute - Red
- Input Voltage: 5V



3. Key Specification

Module Specification			
Dimension (mm)	50.0mm x50.0mm x 23mm		
Power Supply	+4.75V ~ +5.25V		
Image/Video Format	YUY2, MJPG		
Output Interface	USB2.0 (480Mbit/sec)		
Operating Temperature	0°C to +55°C		
Compatibility	USB Video Class		
Power Consumption			
	Min	Type	Max
Input Supply Voltage	4.75	5.0V DC	5.25
Un-configured Current	-	30 mA	-
Operating Current	-	-	260 mA
Suspend Current	-	0.5 mA	-
Display mode	360° Panorama View		
	360° Meeting View		
	360° Panorama + Single View		
	360° Panorama + Dual View		
	360° Conner View		
	180° Panorama View		

Lens Specification	
Element	4 Glass+ 2 Plastic + IR
F Number	2.0±5%
Field of view(Diagonal)	226°


Icon for display mode




360 Meeting view



360 Panorama + Single view




360 Panorama + Dual view



360 Panorama view



360 Conner view




180 Panorama view



4. Pin Description

Pin Description			
Pin Number	Name	Pin Type	Function Description
1	VCC	Power	USB Power Supply +3.3/5.0V
2	D-	Data Pin	USB Data Transmission
3	D+	Data Pin	USB Data Transmission
4	GND	GND	System Ground
5	NC		

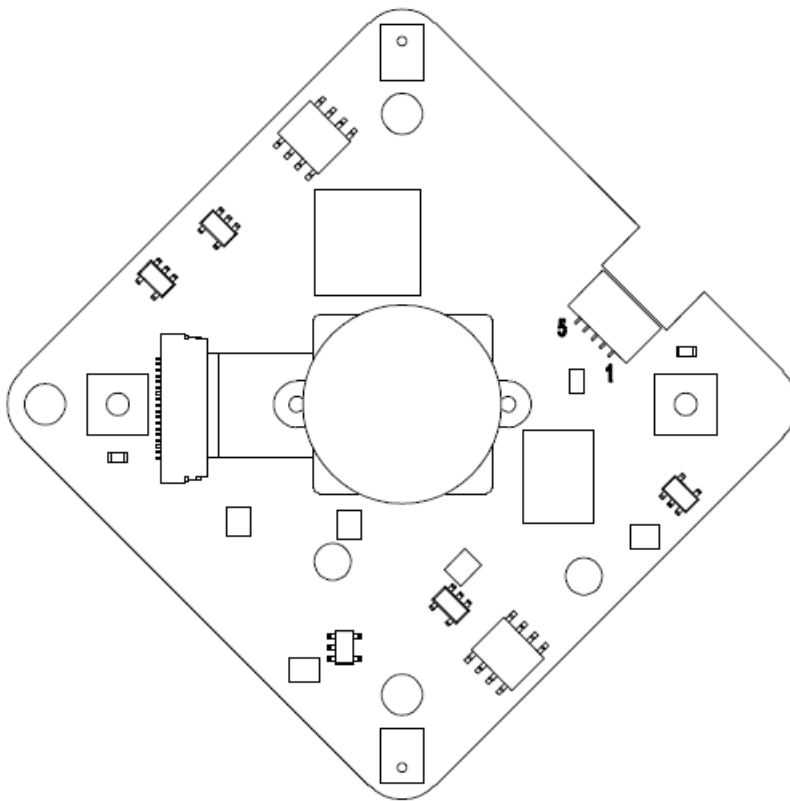



7. Outline Specification

