

MOTOR RUN AC METALLIZED

MRC SERIES

The MRC series is a range of AC metallized capacitors. These capacitors are most often used in motor run, HVAC, lighting, and power supply applications.

FEATURES:

- .25" 4-Way Quick Connect terminals
- Pressure activated circuit interrupter
- Self healing of shorts due to dielectric breakdown
- Non-PCB dielectric fluid
- Low dissipation factor
- Leak-proof terminals

RATINGS

Capacitance Range:

370 Volts – 2 μ F to 50 μ F

440 Volts – 2 μ F to 60 μ F

Tolerance: See Table on Next Page

PERFORMANCE SPECIFICATIONS

Operating Temperature Range: -40° to +70°C

Capacitance Change Due to Temp: +5% to -7%

Dissipation Factor: 0.001% Max @ 60Hz

(MRC440V17R5 ONLY) 0.1% Max @ 60Hz

Service Life: *150,000 hours (at Max Rating)
94% survival


Shelf Life: 10 years (when stored at < 35°C)

Impregnant: Dykanol XK


CAPACITOR CONSTRUCTION

Metallized electrodes on both sides of paper substrate are wound with polypropylene film as a dielectric. During vacuum fluid processing the paper acts as a wick for thorough fluid impregnation to SUPPRESS CORONA and to promote long life.


ORDERING INFORMATION

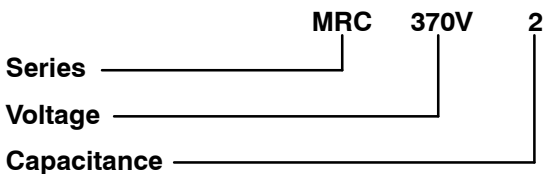

* EIA Standard is 60,000 hours

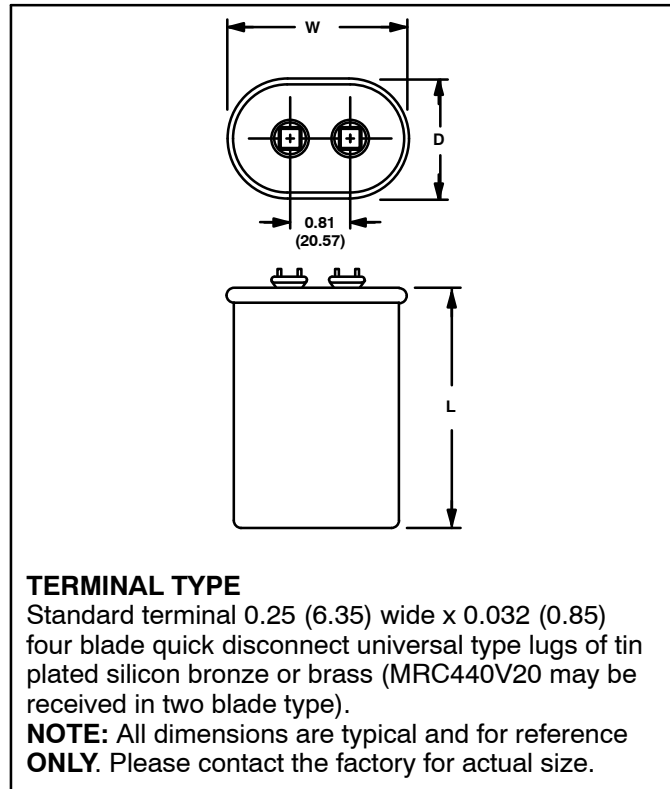


DISSIPATION FACTOR VS. TEMPERATURE

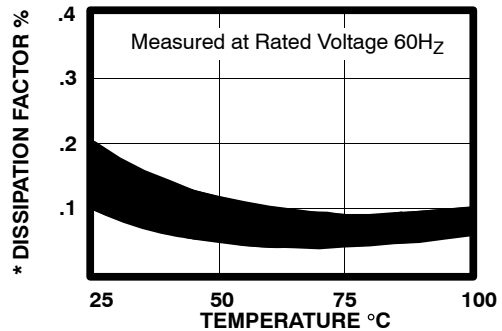

* NOTE - DF values after rated voltage is applied for 24 hours.

CAPACITANCE VS. TEMPERATURE

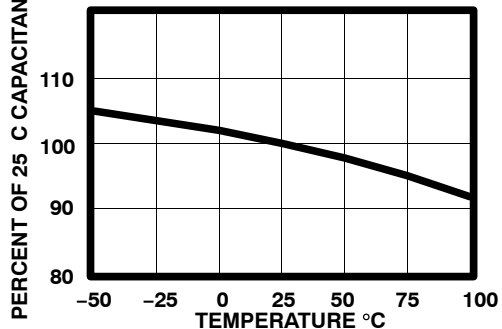

MOTOR RUN AC METALLIZED

MRC SERIES

370VAC Ratings and Dimensions @ 70° Case Temp.

NTE Type Number	Capacitance μF	Tolerance %	Case Dimensions * – Inch (mm)			Case Style	Accessories
			W	D	L		
MRC370V2	2	6	2.16 (54.86)	1.31 (33.27)	1.50 (38.10)	A	MRCH-01, MRCH-04, MRCH-07, MRCH-10
MRC370V3	3	6	2.16 (54.86)	1.31 (33.27)	1.50 (38.10)	A	
MRC370V4	4	6	2.16 (54.86)	1.31 (33.27)	1.50 (38.10)	A	
MRC370V5	5	6	2.16 (54.86)	1.31 (33.27)	1.50 (38.10)	A	
MRC370V6	6	6	2.16 (54.86)	1.31 (33.27)	1.50 (38.10)	A	
MRC370V7R5	7.5	6	2.16 (54.86)	1.31 (33.27)	1.63 (41.40)	A	
MRC370V10	10	6	2.16 (54.86)	1.31 (33.27)	2.00 (50.80)	A	
MRC370V12R5	12.5	6	2.16 (54.86)	1.31 (33.27)	2.63 (66.68)	A	
MRC370V15	15	6	2.16 (54.86)	1.31 (33.27)	3.75 (95.25)	A	
MRC370V17R5	17.5	6	2.16 (54.86)	1.31 (33.27)	3.95 (100.33)	A	
MRC370V20	20	6	2.91 (73.81)	1.91 (48.41)	3.00 (76.20)	C	
MRC370V25	25	6	2.16 (54.86)	1.31 (33.27)	3.75 (95.25)	A	MRCH-01, MRCH-04, MRCH-07, MRCH-10
MRC370V30	30	6	2.91 (73.81)	1.91 (48.41)	3.00 (76.20)	C	
MRC370V35	35	6	2.87 (72.89)	1.87 (47.50)	3.94 (100.08)	B	MRCH-02, MRCH-05, MRCH-08, MRCH-10
MRC370V40	40	6	2.91 (73.81)	1.91 (48.41)	3.75 (95.25)	C	
MRC370V45	45	6	2.91 (73.81)	1.91 (48.41)	3.75 (95.25)	C	MRCH-03, MRCH-06, MRCH-09, MRCH-10
MRC370V50	50	6	2.91 (73.81)	1.91 (48.41)	3.75 (95.25)	C	

* These dimensions are for reference only, please consult the factory for actual size.

440VAC Ratings and Dimensions @ 70° Case Temp.

NTE Type Number	Capacitance μF	Tolerance %	Case Dimensions * – Inch (mm)			Case Style	Accessories
			W	D	L		
MRC440V2	2	6	2.16 (54.86)	1.31 (33.27)	1.63 (41.40)	A	MRCH-01, MRCH-04, MRCH-07, MRCH-10
MRC440V3	3	6	2.16 (54.86)	1.31 (33.27)	2.25 (57.20)	A	
MRC440V4	4	6	2.16 (54.86)	1.31 (33.27)	2.25 (57.20)	A	
MRC440V5	5	6	2.16 (54.86)	1.31 (33.27)	2.25 (57.20)	A	
MRC440V6	6	6	2.16 (54.86)	1.31 (33.27)	2.63 (66.80)	A	
MRC440V7R5	7.5	6	2.16 (54.86)	1.31 (33.27)	2.63 (66.80)	A	
MRC440V10	10	6	2.16 (54.86)	1.31 (33.27)	3.00 (76.20)	A	
MRC440V12R5	12.5	6	2.87 (72.89)	1.87 (47.50)	3.00 (76.20)	A	
MRC440V15	15	6	2.16 (54.86)	1.31 (33.27)	3.00 (76.20)	A	
MRC440V17R5	17.5	6	2.91 (73.81)	1.91 (48.41)	4.00 (101.60)	C	
MRC440V20	20	6	2.91 (73.81)	1.91 (48.41)	2.63 (66.80)	C	
MRC440V25	25	6	2.91 (73.81)	1.91 (48.41)	2.63 (66.80)	C	
MRC440V30	30	6	2.91 (73.81)	1.91 (48.41)	3.00 (76.20)	C	
MRC440V35	35	6	2.91 (73.81)	1.91 (48.41)	4.00 (101.60)	C	
MRC440V40	40	6	2.91 (73.81)	1.91 (48.41)	4.75 (120.70)	C	
MRC440V45	45	6	2.91 (73.81)	1.91 (48.41)	4.75 (120.70)	C	
MRC440V50	50	6	2.91 (73.81)	1.91 (48.41)	4.00 (101.60)	C	
MRC440V55	55	6	2.91 (73.81)	1.91 (48.41)	4.75 (120.70)	C	
MRC440V60	60	6	2.91 (73.81)	1.91 (48.41)	4.75 (120.70)	C	

* These dimensions are for reference only, please consult the factory for actual size.