


REV. 0  
DCO 142658

|                 |                           |
|-----------------|---------------------------|
| COIL: @ 25°C    |                           |
| RESISTANCE      | 140 OHMS ± 10%            |
| NOMINAL VOLTAGE | 9.0 VDC                   |
| MUST OPERATE    | 4.4 VDC                   |
| MUST RELEASE    | 2.6 VDC MAX. 0.5 VDC MIN. |

|              |                             |
|--------------|-----------------------------|
| ENVIRONMENT: |                             |
| VIBRATION    | 10 CPS TO 3000 CPS @ 30 g's |
| SHOCK        | 75 g's 6 MS. DURATION       |
| TEMPERATURE  | -65 °C TO +125 °C           |

NOTES: OPERATE & RELEASE 4 MS MAX.  
CONTACT STABILIZATION TIME 2.5 MS MAX.

CUSTOMER DATA SHEET

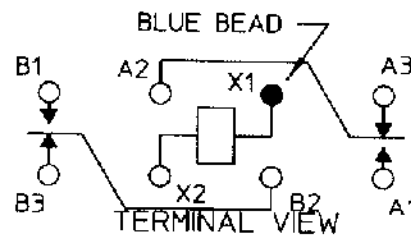

CONTACT RATING: LOW LEVEL TO  
2 AMPS 28 VDC RESISTIVE  
50,000 OPERATIONS

DR. PBB 1/25/01 CK. TLG 01-25-00

**IICT Technologies™**  
advanced control electronic solutions

|                                     |              |
|-------------------------------------|--------------|
| CUST. QPL                           | "3SBC" RELAY |
| CUST. NO. M39016/13-075P REV. _____ |              |

3SBC2020A2