


- NOTES:**
- MATERIALS:**
 HOOD, GLAND, COMPR.-RING: ABS UL94 V-0 METALLIZED
 FRONTSEALING: SILICONE VMQ BLUE
 CABLE SEALING: NBR BLACK
 JACK-SCREW: STAINLESS STEEL
 O-RING: NBR BLACK
 CABLE STRAIN RELIEF: STEEL, NI-PLATED
 SCREWS: STEEL, NI-PLATED
 SHIELDING BRACKET: CU-ALLOY, NI-PLATED
 - TEMPERATURE RANGE: -30°C TO +80°C
 - RECOMMENDED TORQUE FOR SCREW:
 35Ncm (3.1 in.LB)
 MAX. TORQUE: 68Ncm (6 in.LB)
 - SINGLE PACKED

* COMPLETELY TIGHTENED

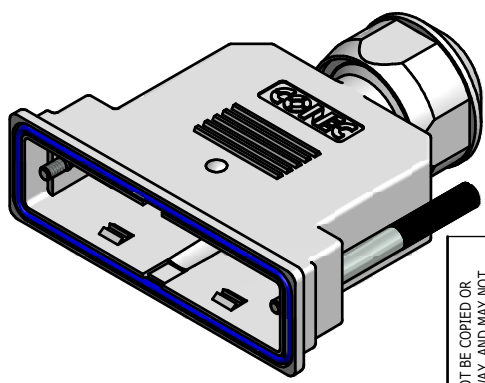

Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm		scale: 1,5:1 (1:1)	
					material: SEE NOTES	
			date		title:	
			name		WATER RESISTANT D-SUB HOOD	
		drawn 07.02.2014		SHIELDED 50 POS.		
		appd. 07.02.2014		JACKSCREW 4-40UNC STAINLESS STEEL		
		norm		dwg no:		
		d-old		15K1A1154		
1 x b	Ä 5092	12.03.14	Heinrich	DIN-A3		
a	Origin			sh: 1		
rev.	description	date	name			
				part no: 15-004800		